


M-10852 1

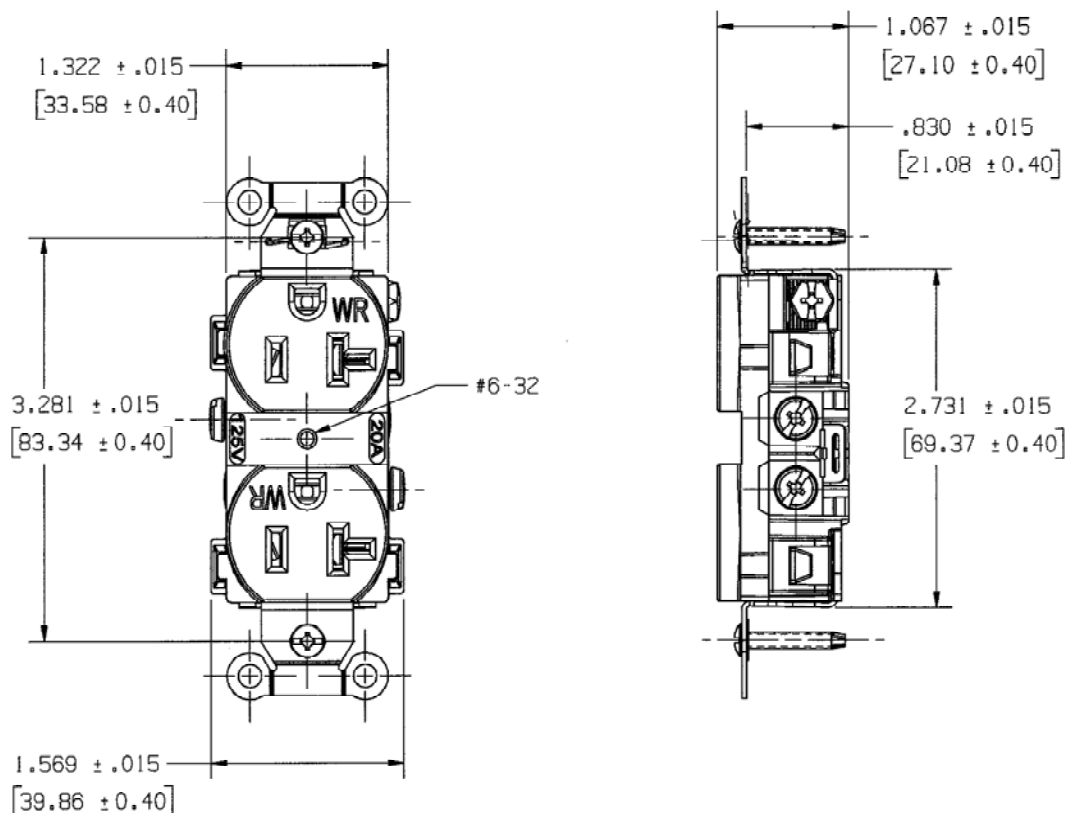

NOTES:

- 1) DIMENSIONS ARE IN INCHES (MM).
- 2) ALL DEVICES UL LISTED, CSA AND FED. SPEC. CERTIFIED.
- 3) TERMINALS ACCOMMODATE #14-#10 AWG COPPER WIRE ONLY.

CATALOG NUMBERS

	BROWN	IVORY	GRAY	WHITE	BLACK	ALMOND	BLUE	LIGHT ALMOND	RED	ORANGE	OFFICE WHITE
HUBBELL	BR20WR	BR20IWR	BR20GRYWR	BR20WHIWR	BR20BLKWR	BR20ALWR	-----	BR20LAWR	-----	-----	-----

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
TOP	NYLON 6/6	SPI A-3
BASE	NYLON 6/6	SPI A-3
LINE CONTACTS	BRASS	
GROUND CONTACTS	BRASS	
CONTACT SCREW (NEU)	S.S.	
CONTACT SCREW (HOT)	S.S.	
BRIDGE	.04 GALV STL	
GROUND SCREW	S.S.	GREEN
STAPLE	S.S.	
WASHER	PVC FILM	BLACK
MOUNTING SCREW	S.S.	

1	RELEASED PER DCN #14555 WRV <i>WRV</i>	01/28/08	B
---	---	----------	---

SYM	REVISIONS	APP	DATE
-----	-----------	-----	------

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE HUBBELL
20A 125V, 2P 3W,
SMOOTH FACE WEATHER RESISTANT
DUPLEX RECEPT, BACK & SIDE WIRE

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLENS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS $\pm 1/64$	DR. BY WRV	APP. BY
DECIMALS $\pm .005$	TR. BY	SCALE 1:1
ANGLES $\pm 2^\circ$	CHK'D BY	DATE 1/08