

## User Guide for the Vaddio RF Remote Commander

August 2021

998-2180-000 (Worldwide)

The Vaddio RF Remote Commander provides basic camera and conference functionality – pan, tilt, zoom, presets, volume control, and muting, as applicable. You can also use the remote to get the camera's IP address. This remote is a radio-frequency device, and is not compatible with products that use IR (infrared) remotes.

Before you can use the RF remote, you will need to:

- Install the batteries
- Pair the remote with the camera

### Installing the Batteries

The Vaddio RF Remote Commander uses two AAA batteries.

1. Remove the cover from the back of the remote. You may need to press down on the inner edge while sliding it off.
2. Install the batteries as shown in the diagram in the battery compartment.
3. Slide and snap the cover back into place.


### Pairing the Remote to the Camera

The camera does not recognize or respond to the remote until they are paired. Do this after the camera is turned on and its status light is white.

**To pair the remote using the camera's IP button:**

1. Press and hold the camera's IP button until the status light blinks cyan.
2. While the camera's status light blinks cyan, press the pairing button on the remote. The camera's status light changes to steady white when the remote is paired. You may need to press the remote's pairing button more than once.
3. If the status light changes color and keeps blinking, the pairing was not successful. Reboot the camera and go back to step 1. If the problem persists, contact Vaddio Technical Support.

**To pair the remote using the camera's administrative web interface:**

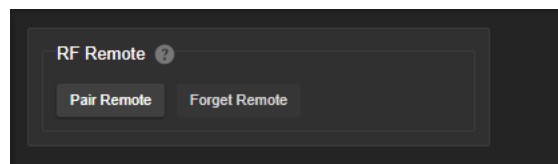



1. On the Pairing page of the web interface, select Pair Remote.
2. When the camera's status light blinks cyan, press and hold the pairing button on the remote until the status light changes to steady white.



## RF Remote Quick Reference

The Vaddio RF Remote Commander may have controls for capabilities that your camera does not have. Some buttons behave in different ways depending on the model of camera.

	<p><b>Indicator and Power button</b> – Set the camera to standby mode, or return to full-power mode.</p>	
	<p><b>Function buttons</b> – Reserved for future use.</p>	
	<p><b>Arrow buttons</b> – Pan and tilt. For cameras with Auto-framing capability, Auto-framing pauses if you use these buttons.</p>	
	<p><b>Home button</b> – Function depends on the model of camera. For cameras with Auto-framing capability, Auto-framing resumes when you press this button.</p>	
	<p><b>Network button</b> – Display the camera's IP address on the video output.</p>	
	<p><b>Pairing button</b> – Use when pairing the remote with the camera.</p>	
	<p><b>Mute button</b> – Mute the microphone(s).</p>	
	<p>Reserved for future use.</p>	
	<p><b>Volume +/- button</b> – Increase or decrease the volume from the connected speaker.</p>	
	<p><b>Focus +/- buttons</b> – Adjust the focal distance in or out, when Manual focus mode is selected.</p>	
	<p><b>Zoom +/- button</b> – Increase or decrease the zoom.</p>	
	<p><b>Auto and Man buttons</b> – Select automatic or manual focus.</p>	
	<p><b>Preset buttons</b> – Set, clear, or select preset shots. For cameras with Auto-framing capability, Auto-framing pauses if you use these buttons.</p>	


## Other Things to Know About the Remote

Here are some common situations in which the Vaddio RF Remote Commander can behave in ways you don't expect.

- **Environments with cameras in adjacent rooms** – If the remote is currently paired to a camera and within range of that camera, it will not pair with another camera.
- **The remote goes to standby mode after a brief period of inactivity.** Press a button to wake it up.
- **The remote is no longer paired after restoring the camera's factory defaults.** If you restore factory defaults on the camera, pair it with the remote again.

## Unpairing the Remote

If you need to unpair the remote from the camera that currently recognizes it, you will need to log in to the camera's web interface as **admin**. On the Pairing page, select Forget Remote.

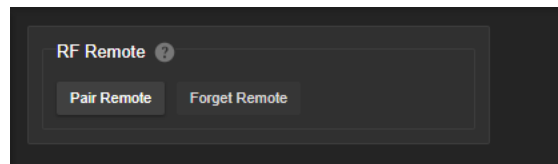

Vaddio is a brand of Legrand AV Inc. · [www.legrandav.com](http://www.legrandav.com) · Phone 800.572.2011 / +1.763.971.4400 · Fax +1.763.971.4464 · Email [av.vaddio.support@legrand.com](mailto:av.vaddio.support@legrand.com)

Vaddio is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

©2021 Legrand AV Inc.