




Add your Smart Device to your App – Auto

- Open the BrilliantSmart App, tap 'Add Device' (if empty room) or '+' to add your Smart device.
- Turn your smart bluetooth mesh device on. Your device should pulse 3 times then stay on. Select 'Confirm the light has flashed' (if device did not pulse 3 times then turn off at the switch 3 times to reset to pairing mode (ON-OFF-ON-OFF-ON-OFF-ON)).
- Select 'Auto Scan' tab.
- Turn on Mobile device WiFi, eg, phone or Tablet – select 'Enable Wi-Fi'. Then press 'Start Scanning'.




The App is now scanning for smart bluetooth devices.

- BrilliantSmart app has detected device to be paired. Select 'Next'.




- The App will now pair with your device. Do not perform any other operation at this time.


- Your device is now paired with the App. Press 'Done'.



- Select the pen to change the name to one of your choosing. Press 'Done'.




- Your device is now ready to use. Select your device to take you to Control User Interface (UI) screen.



Device is ON.

Press Device is OFF



To connect to voice control or for full features & instructions go to www.brilliantsmart.com.au

Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 5 years from date of purchase. Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, or incorrect installation.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 5 years of the date of purchase of the product.

This Warranty is only for product replacement and does not include associated costs such as labour, transport or specialised access equipment

Refer to our website brilliantlighting.com.au for terms and conditions and warranty claims.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.
 ABN 37 006 203 694
 956 Stud Road Rowville, VIC 3178
 Phone: 03 9765 2555
 Email: warranty@brilliantlighting.com.au

MADE IN CHINA

Warning

- Do not allow children to play with this device as this is not a toy.
- Power surge/power loss could possibly reset Smart device. If this happens, follow the setup instructions.
- Pairing button is not an override or a control button.

NB: BrilliantSmart app screens may differ due to application updates & improvements.

Disposal

Please dispose of this packaging material thoughtfully.

Please dispose of this product thoughtfully once it has passed its useful life. When your smart device comes to the end of its life or you choose to update or upgrade it, please do not dispose of it with your normal household waste. Please recycle where facilities exist.

When disposing of this fitting, check with your local authority for suitable options.

Troubleshooting

Problem:
Smart device does not switch ON

| Possible Cause | Suggested Solution |
|----------------|---------------------------------------|
| No Mains Power | Check connections, fuses and switches |

Problem:
Cannot link smart device with BrilliantSmart app

| Possible Cause | Suggested Solution |
|---|--|
| 1. Modem signal weak | Place device and modem closer together |
| 2. Router/modem/smart phone firewall is enabled | Disable firewalls on all devices |
| 3. Internet connection is down | Contact your provider |
| 4. BrilliantSmart app not installed correctly | Remove app and re-install |

For any other problems connecting your smart device to BrilliantSmart app please visit: www.brilliantsmart.com.au/faq

Brilliant Lighting
 956 Stud Road
 Rowville Vic 3178 Australia

www.brilliantlighting.com.au

Australian Sales
 T 03 9765 2555
 T 1800 817 754 (interstate only)
 F 03 9763 0277
 E warranty@brilliantlighting.com.au

New Zealand Sales
 T 09 974 9618
 E sales@brilliantlighting.co.nz



Brilliant SMART Smart Discus-III Highbay Bluetooth Mesh Linkable 150W 21533/05



QUICK START MANUAL
BLUETOOTH MESH NETWORK

Box Content

- Highbay with flex & plug x 1
- Hanging hook with primary safety screw x 1
- Locking nut x 1
- Safety screw (secondary) x 1
- Safety lanyard x 1
- Quick Start Manual x 1

Technical Specifications

Model: 21533/05

Fitting: Aluminium heatsink, stainless steel mounting hook, stainless steel safety lanyard

Insulation: Class I (Earthed)

Colour Temperature: 5000K (Natural White)

Lumens: 22,500lm

Rating: 240V 50Hz, 150W

Ingress Protection: IP65 (excluding supply socket)

Impact Rating: IK07 (Glass Lens Only)

Total Weight: 3.7kg

Dimensions: 203mm x Ø280mm

Beam Angle: 120° (Glass Lens Only)

Maximum mounting height: 20m

Ta: 50°C




Warranty: 5 Years - product replacement only

Security: Mac Encryption; WEP/WAPI/TKIP/AES

WiFi Standard: IEEE802.11b/g/n

System Req's: iOS 8.0 or higher, Android 4.1 or higher

WE RECOMMEND THAT INSTALLATION BE DONE BY A LICENSED ELECTRICIAN.

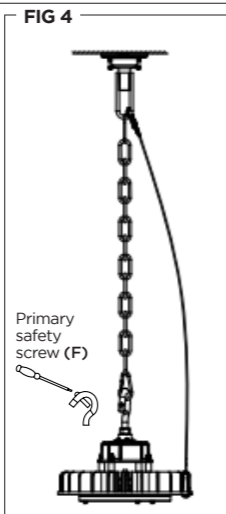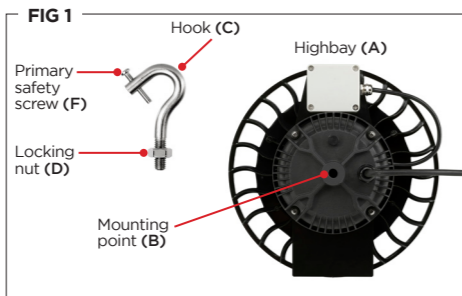

Installation

NB: Ceiling mount with mounting chain/cable (not supplied) needs to be installed prior to fitting of highbay. Chain/cable must be fastened and have a load rating of 30kg minimum.

1. Ensure power is turned off.
2. Remove product from packaging and check all components are present. Dispose of packaging thoughtfully and to local government regulations
3. Insert hook (C) into mounting point (B) on highbay (A). Turn hook (C) until firmly secured. (Fig 1)
4. Tighten locking nut (D) firmly to secure hook (C) to highbay (A).
5. Insert secondary safety screw (E) into small hole under hook (B). Secure firmly using Phillips type screwdriver. (Fig 2)
6. Unravel safety lanyard (G) and place through spacers on highbay (A).
7. Clip one carabiner of safety lanyard (G) around onto itself as pictured. (Fig 3)
8. Loosen primary safety screw (F) on hook (C). Attach hook and safety lanyard onto mounting chain/cable (not supplied).
9. Tighten primary safety screw (F) to secure highbay in place. (Fig 4)
10. Once safely secured, plug into power outlet.
11. Cable tie (not supplied) any loose highbay flex cable to the mounting chain.
12. Turn power on.


Connect to your WiFi

Ensure your mobile phone is connected to your 2.4GHz WiFi network.

Your mobile phone and your smart device needs to be within good signal strength range of your WiFi router.

Download the BrilliantSmart App

Please download the free BrilliantSmart app from the App store or Google Play store, or scan the QR code below.



Register the BrilliantSmart App


Open the BrilliantSmart app.

For new users, register a new account or if existing user, login with your user name and password.

Configure your BrilliantSmart App





Setting up your Home

You can setup multiple homes or locations. Click 'Add Home' button. Or Click on 'Home' top left if you are adding or modifying details then 'Home Management' to setup your home(s), add or rename rooms and share devices.



Add your Smart Device to your App - Manual


1. Open the BrilliantSmart App, tap 'Add Device' (if empty room) or '+' to add your Smart device.
2. Turn your smart bluetooth mesh device on. Your device should pulse 3 times then stay on. Select 'Confirm the light has flashed' (if device did not pulse 3 times then turn off at the switch 3 times to reset to pairing mode (ON-OFF-ON-OFF-ON-OFF-ON)).
3. Select 'Lighting (BLE)' in the list of devices.
4. BrilliantSmart App will scan for the smart device. Do not perform any other operations during this time.
5. Select the device to pair with the App by pressing 'Add'.



6. BrilliantSmart app is now pairing with your device.



7. Your device is now paired with the App. Click on the 'pen' to change the name to one of your choosing. Press 'Done'.



8. Your device is now ready to use. Select your device to take you to Control User Interface (UI) screen.



Device is ON.

Press Device is OFF

