





SMART WiFi HOME SECURITY KIT

Wireless and easy to install home security.

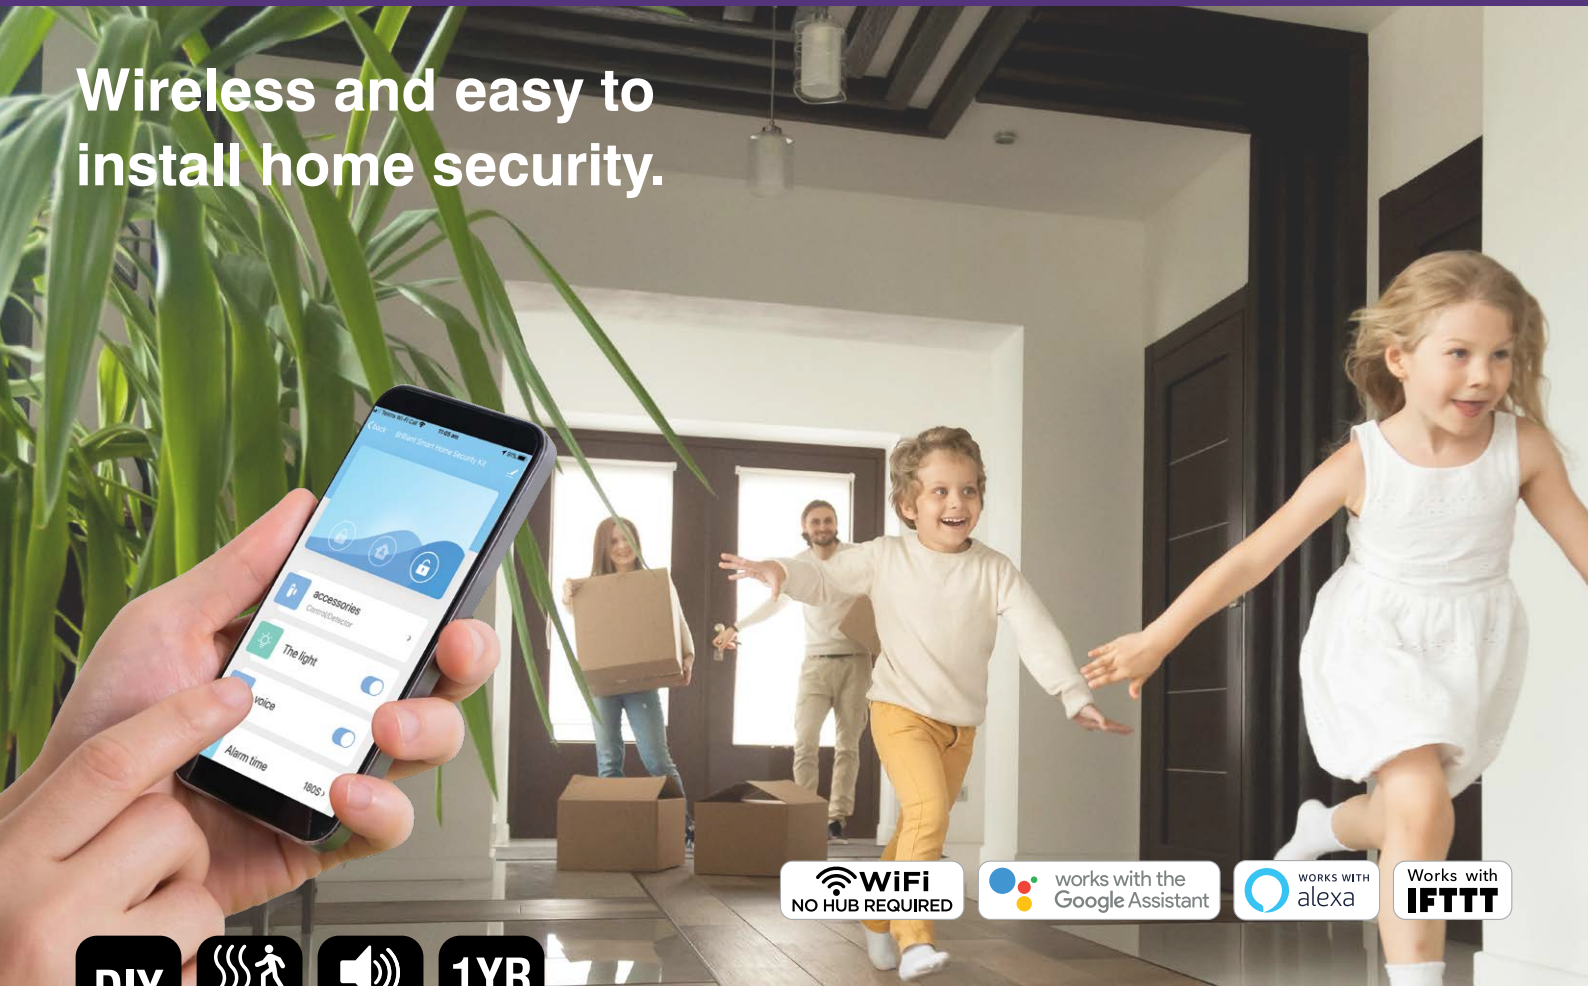

A 'Starter' package for any house, apartment, office or caravan. It connects easily with your existing WiFi network allowing you to monitor your home from anywhere.

- Expandable to manage up to 24 sensors/detectors and 8 remote controls
- Wireless, easy to install and portable which is ideal for renters
- Sensors and remotes communicate via radio frequency (433MHz)
- 3 Alarm Modes
 - Arm: Alarm with sound & light flash
 - Home: Alarm with light flash
 - Disarm: Only SOS alarm available
- Tamper-resistant
- SOS/Panic alert to either sound siren or make an emergency call
- Maintains a local monitor and alert when your WiFi is down
- PIR Sensor can detect movement up to 8 metres on a 100 degree scan angle
- Compatible with BrilliantSmart devices via automation & IFTTT
- Kit includes 1x Smart Siren & WiFi Gateway with power adaptor, 1x Magnetic Door/Window sensor, 1x PIR Sensor, 1x Doorbell, 1x Remote

APPLICATIONS

- Monitor access points of your property to deter intruders.
- Create in app automation, so lights come on based on certain behaviour, ie: when movement is detected via a sensor, the lights turn on automatically



SMART SIREN



DOOR/WINDOW SENSOR



DOORBELL



PIR SENSOR

POWER ADAPTOR



REMOTE





SMART WiFi HOME SECURITY KIT

TECHNICAL SPECIFICATIONS


| | |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating voltage: | 240V / 50Hz |
| Operation Modes: | Arm / Home / Disarm |
| Volume adjustment: | Low / Med / High |
| Time Setting: | 5 ~ 180 seconds |
| Motion detection: | Advanced PIR motion sensing |
| PIR range: | 8m x 100 degrees (Adjustable) |
| PIR sensitivity: | Auto only |
| Power source: | Siren: Built-in rechargeable battery 300mAh Doorbell: CR2032 3V (included) PIR Sensor: 9V (included) Door/Window Sensor: 23A 12V (included) Remote: CR2032 3V (included) |
| Supported power: | Micro USB power port 5V DC 2A |
| Construction: | Durable ABS with Polycarbonate |
| Operating temperature: | 10°C to 35°C |
| Battery life: | Siren has a battery life of 4 hours once unplugged from a power source |
| Warranty: | 1 year replacement |
| WiFi Info: | IEEE802.11b/g/n, 2.4GHz Mac Encryption; WEP/WAPI/TKIP/AES |
| Radio Frequency Info: | RF 433MHz |
| Device Requirements: | iOS 8.0 or higher, Android 4.1 or higher |
| Standards: | AS/NZS 62368.1 AS/NZS 4268 AS/NZS CISPR 32 |



INSTALLATION

Do-it-Yourself installation (battery operation)

ACCESSORIES (sold separately)
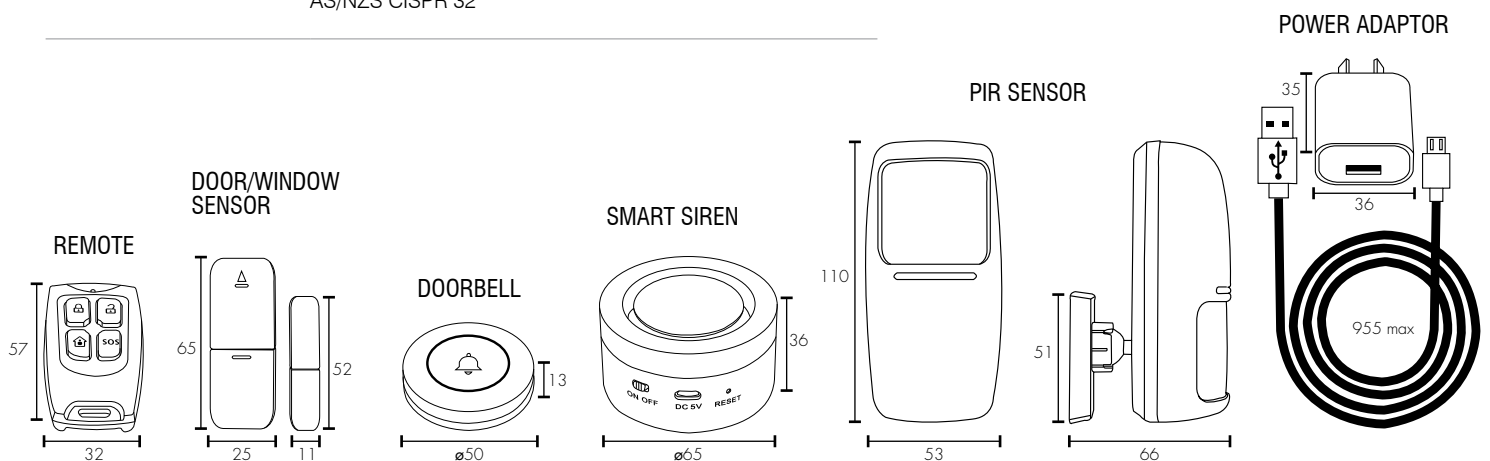
| | |
|--------------------|------------------|
| PIR Sensor | 21518SP001 white |
| Door/Window Sensor | 21518SP002 white |
| Remote | 21518SP004 white |



| | MODEL | COLOUR | DESCRIPTION | BOX SIZE | GROSS WEIGHT | BOX QTY | BARCODE/TUN |
|-------------------|-------|--------|------------------------------|-----------------------|--------------|---------|------------------------------------------------------------------------------------------------------------|
| RETAIL BOX | 21518 | White | Smart WiFi Home Security Kit | W192 x H78 x D138 mm | 0.45 kg | 1 pc |  9 312641 215189 > |
| OUTER CTN | 21518 | White | Smart WiFi Home Security Kit | W420 x H402 x D412 mm | 9.00 kg | 20 pc |  19312641215186 |