

Switches, Single Pole, Double Throw
20A, 120-277V AC
HBL® Extra Heavy Duty Industrial Switch

HUBBELL

Features

- Large brass binding head screws with deep slots
- Strip gauge for accurate wiring
- Strip gauge for accurate wiring

Ordering Information

Description	Toggle Color	UPC	Catalog Number
Momentary Contact, Key guide, Three Position, Two Circuit, Back and Side Wired, Locking	White	783585188737	HBL1557LW

Listings

UL Listed
CSA Certified
Fed. Spec. W-S-896


Specifications

Top Material	Thermoset
Base Material	Thermoset, Red
Key Guide	Metallic, White
Contacts	Silver Alloy
Terminal Screws	Brass
Ground Screw	Brass (Green)

Performance

Electrical	
Dielectric Voltage	Withstands 1500V AC minimum for 1 minute
Max. Continuous Current	20A
Max. Working Voltage	277V AC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Mechanical	
Terminal Accommodations	#14 AWG min. - #10 AWG max. Solid and stranded copper wire only

Environmental	
Flammability	UL 94V-2
Operating Temperature	Max. continuous: 75°C; Min. continuous: -40°C without impact

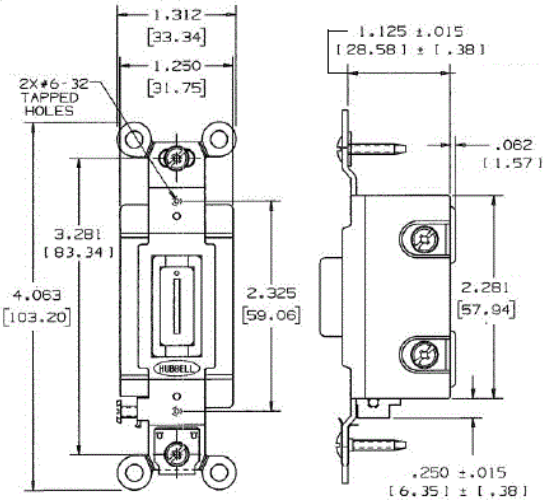

Complementary Products

Nylon Wall Plate	NP1W
------------------	------

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

