
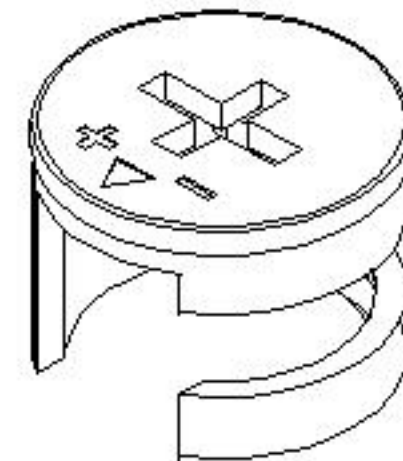
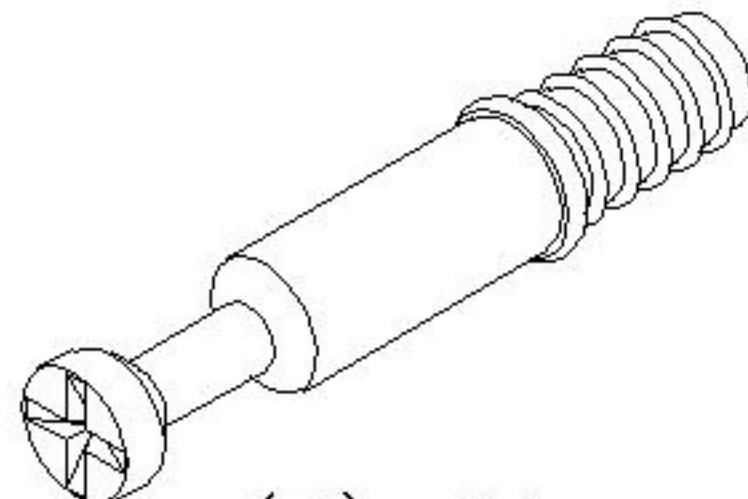
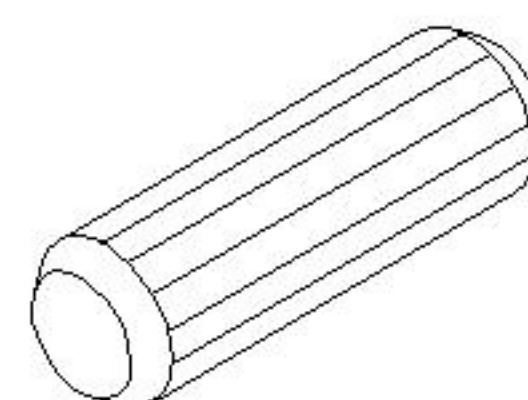
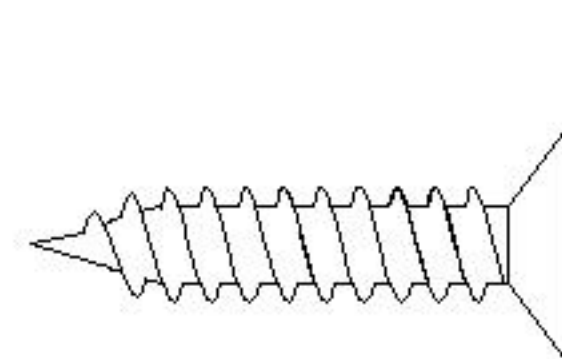
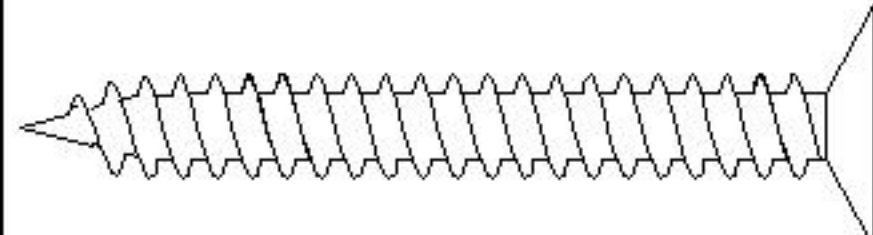
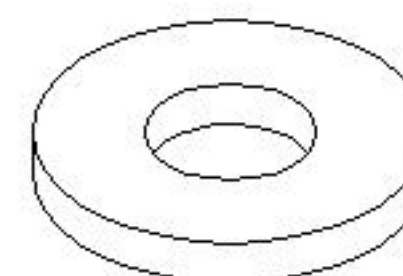
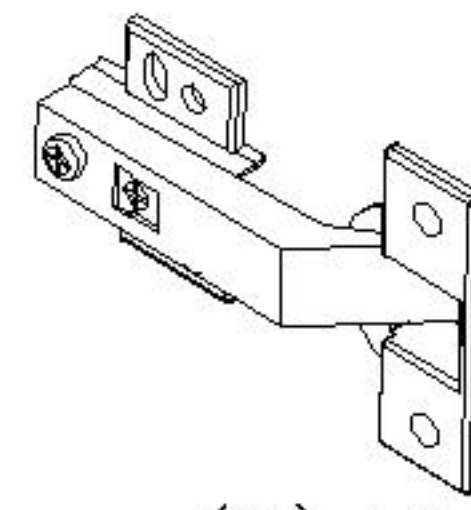
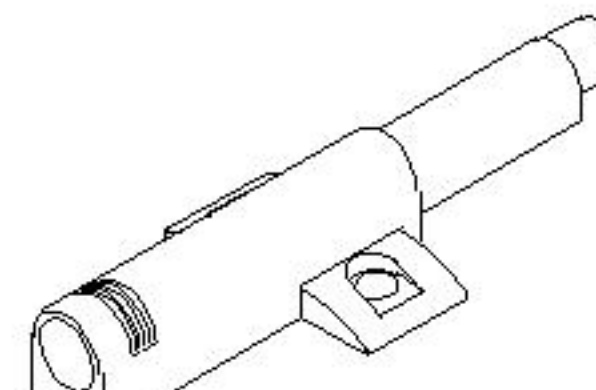
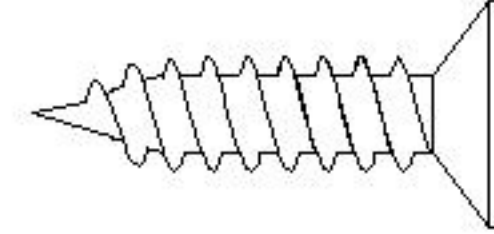
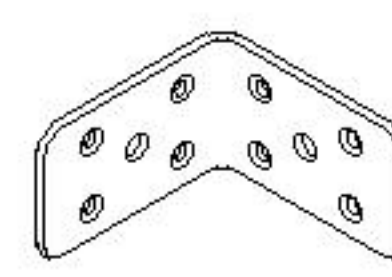
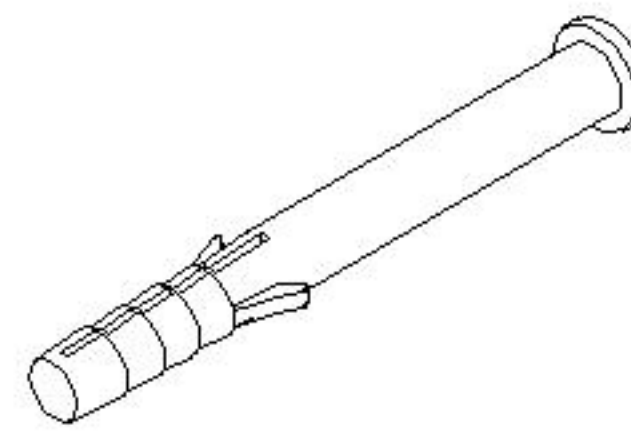


LINSY 林氏家居		五金表/Hardware list				部件表/Parts List				
安装示意图/Assembly Instruction		 (A)*21 大三合一锁饼 3-in-1 large lock  (B)*21 二合一螺杆 2-in-1-screw  (C)*13 木榫-(Ø8*30mm) Wood tenon  (D)*4 自攻螺丝M4*25 Tapping screw  (E)*3 自攻螺丝M5x100mm Self-tapping screw  (F)*3 垫片 Gasket  (G)*6 缓冲门铰直弯-杯径Ø35 Straight bend hinge  (H)*3 反弹器 Rebounder  (I)*32 自攻螺丝M3.5*12 Tapping screw  (J)*3 角码 corner code  (K)*3 膨胀螺丝胶塞 Expansion screw rubber plug				编号NO.	名称Name	规格 (MM) Specification	数量QTY	材质Material
1	面板Top panel					1164*330*15	1	三胺板 Melamine		
2	侧板Side board					400*330*15	2	三胺板 Melamine		
3	中侧板Middle side board					370*313*15	1	三胺板 Melamine		
4	底板Bottom board	1164*330*15	1	三胺板 Melamine						
5	背板Back board	1164*370*15	1	三胺板 Melamine						
6	门板Door board	395*395*18	3	三胺板 Melamine						

1/3


TV11G-A

安装方法/ Installation method




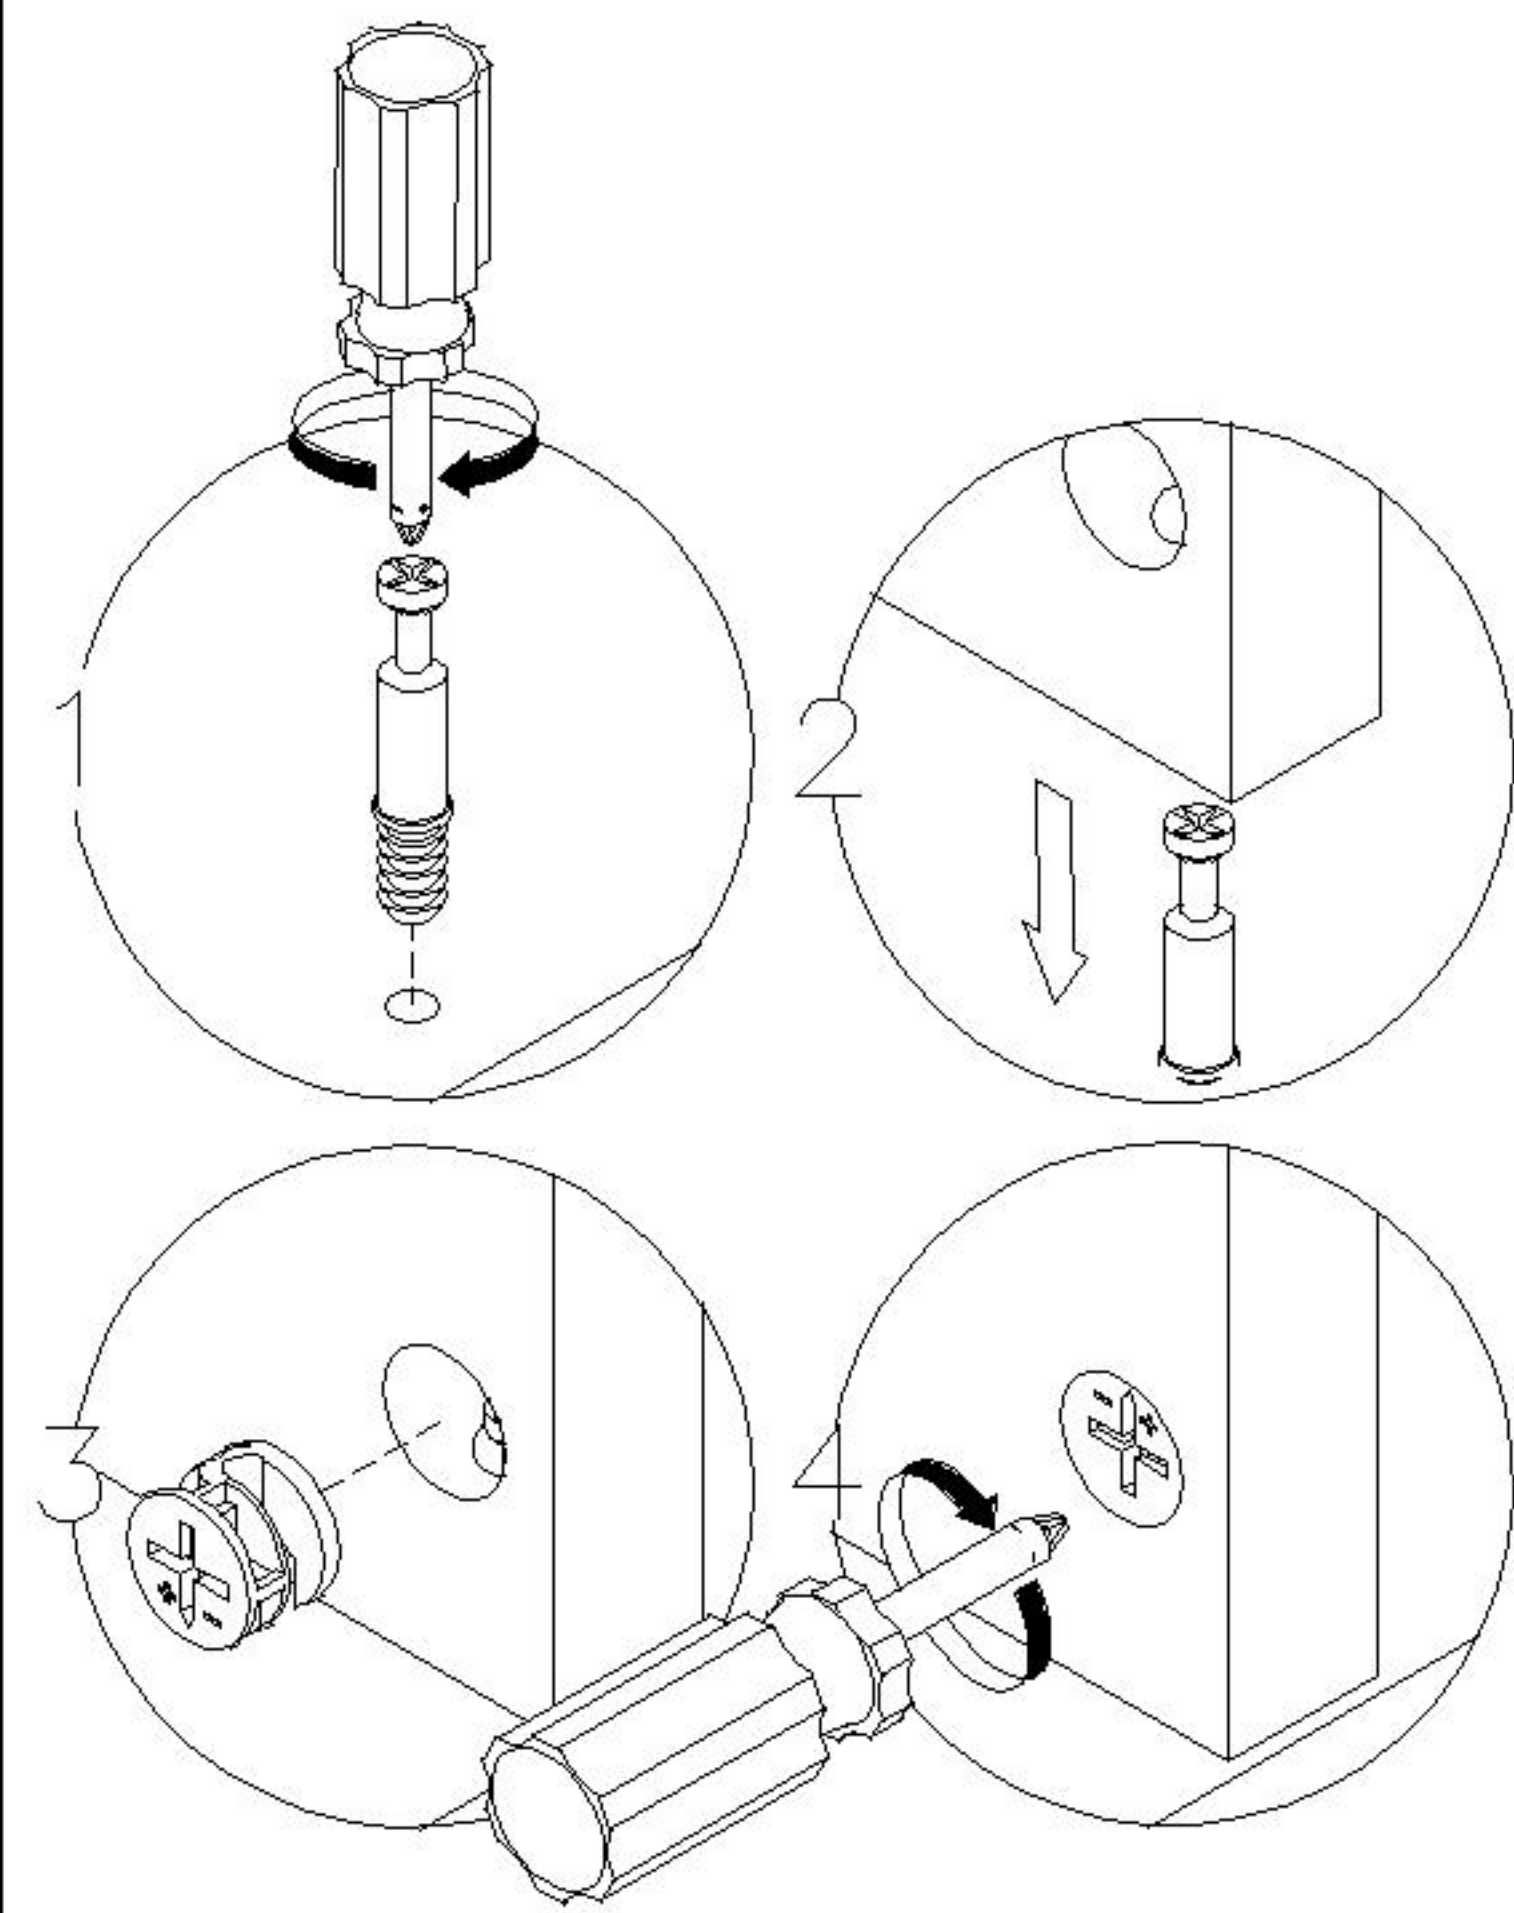


二合一 two-in-one

多余五金, 不需安装
Redundant hardware,
no installation required

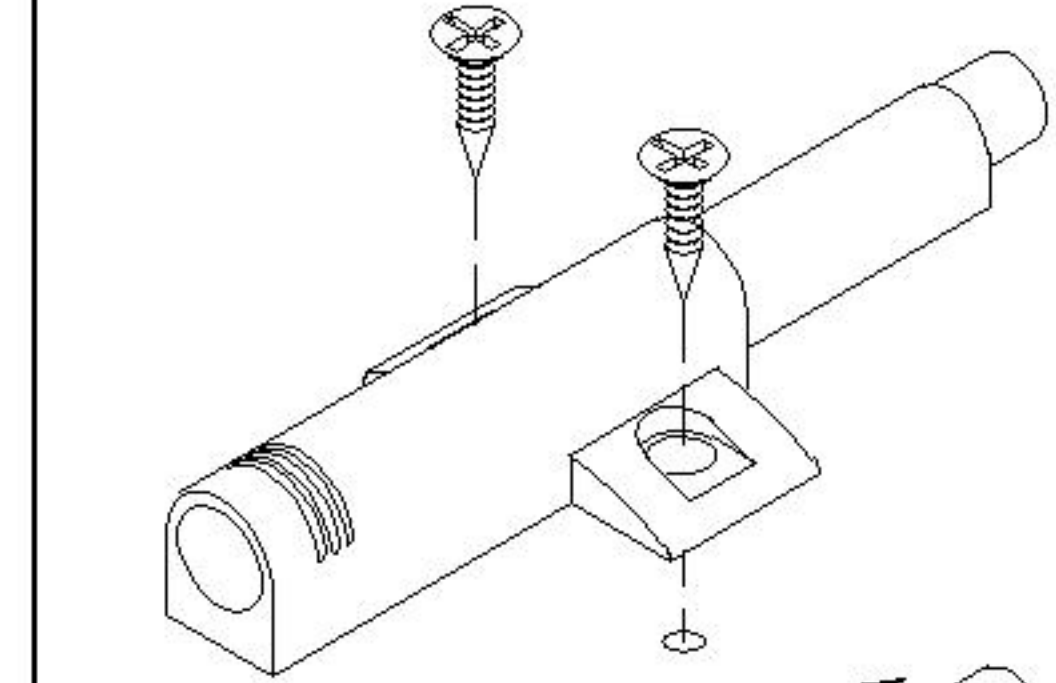


调节长度刚
好顶住面板
Adjustment length
Just against the panel
反弹器
Rebounder

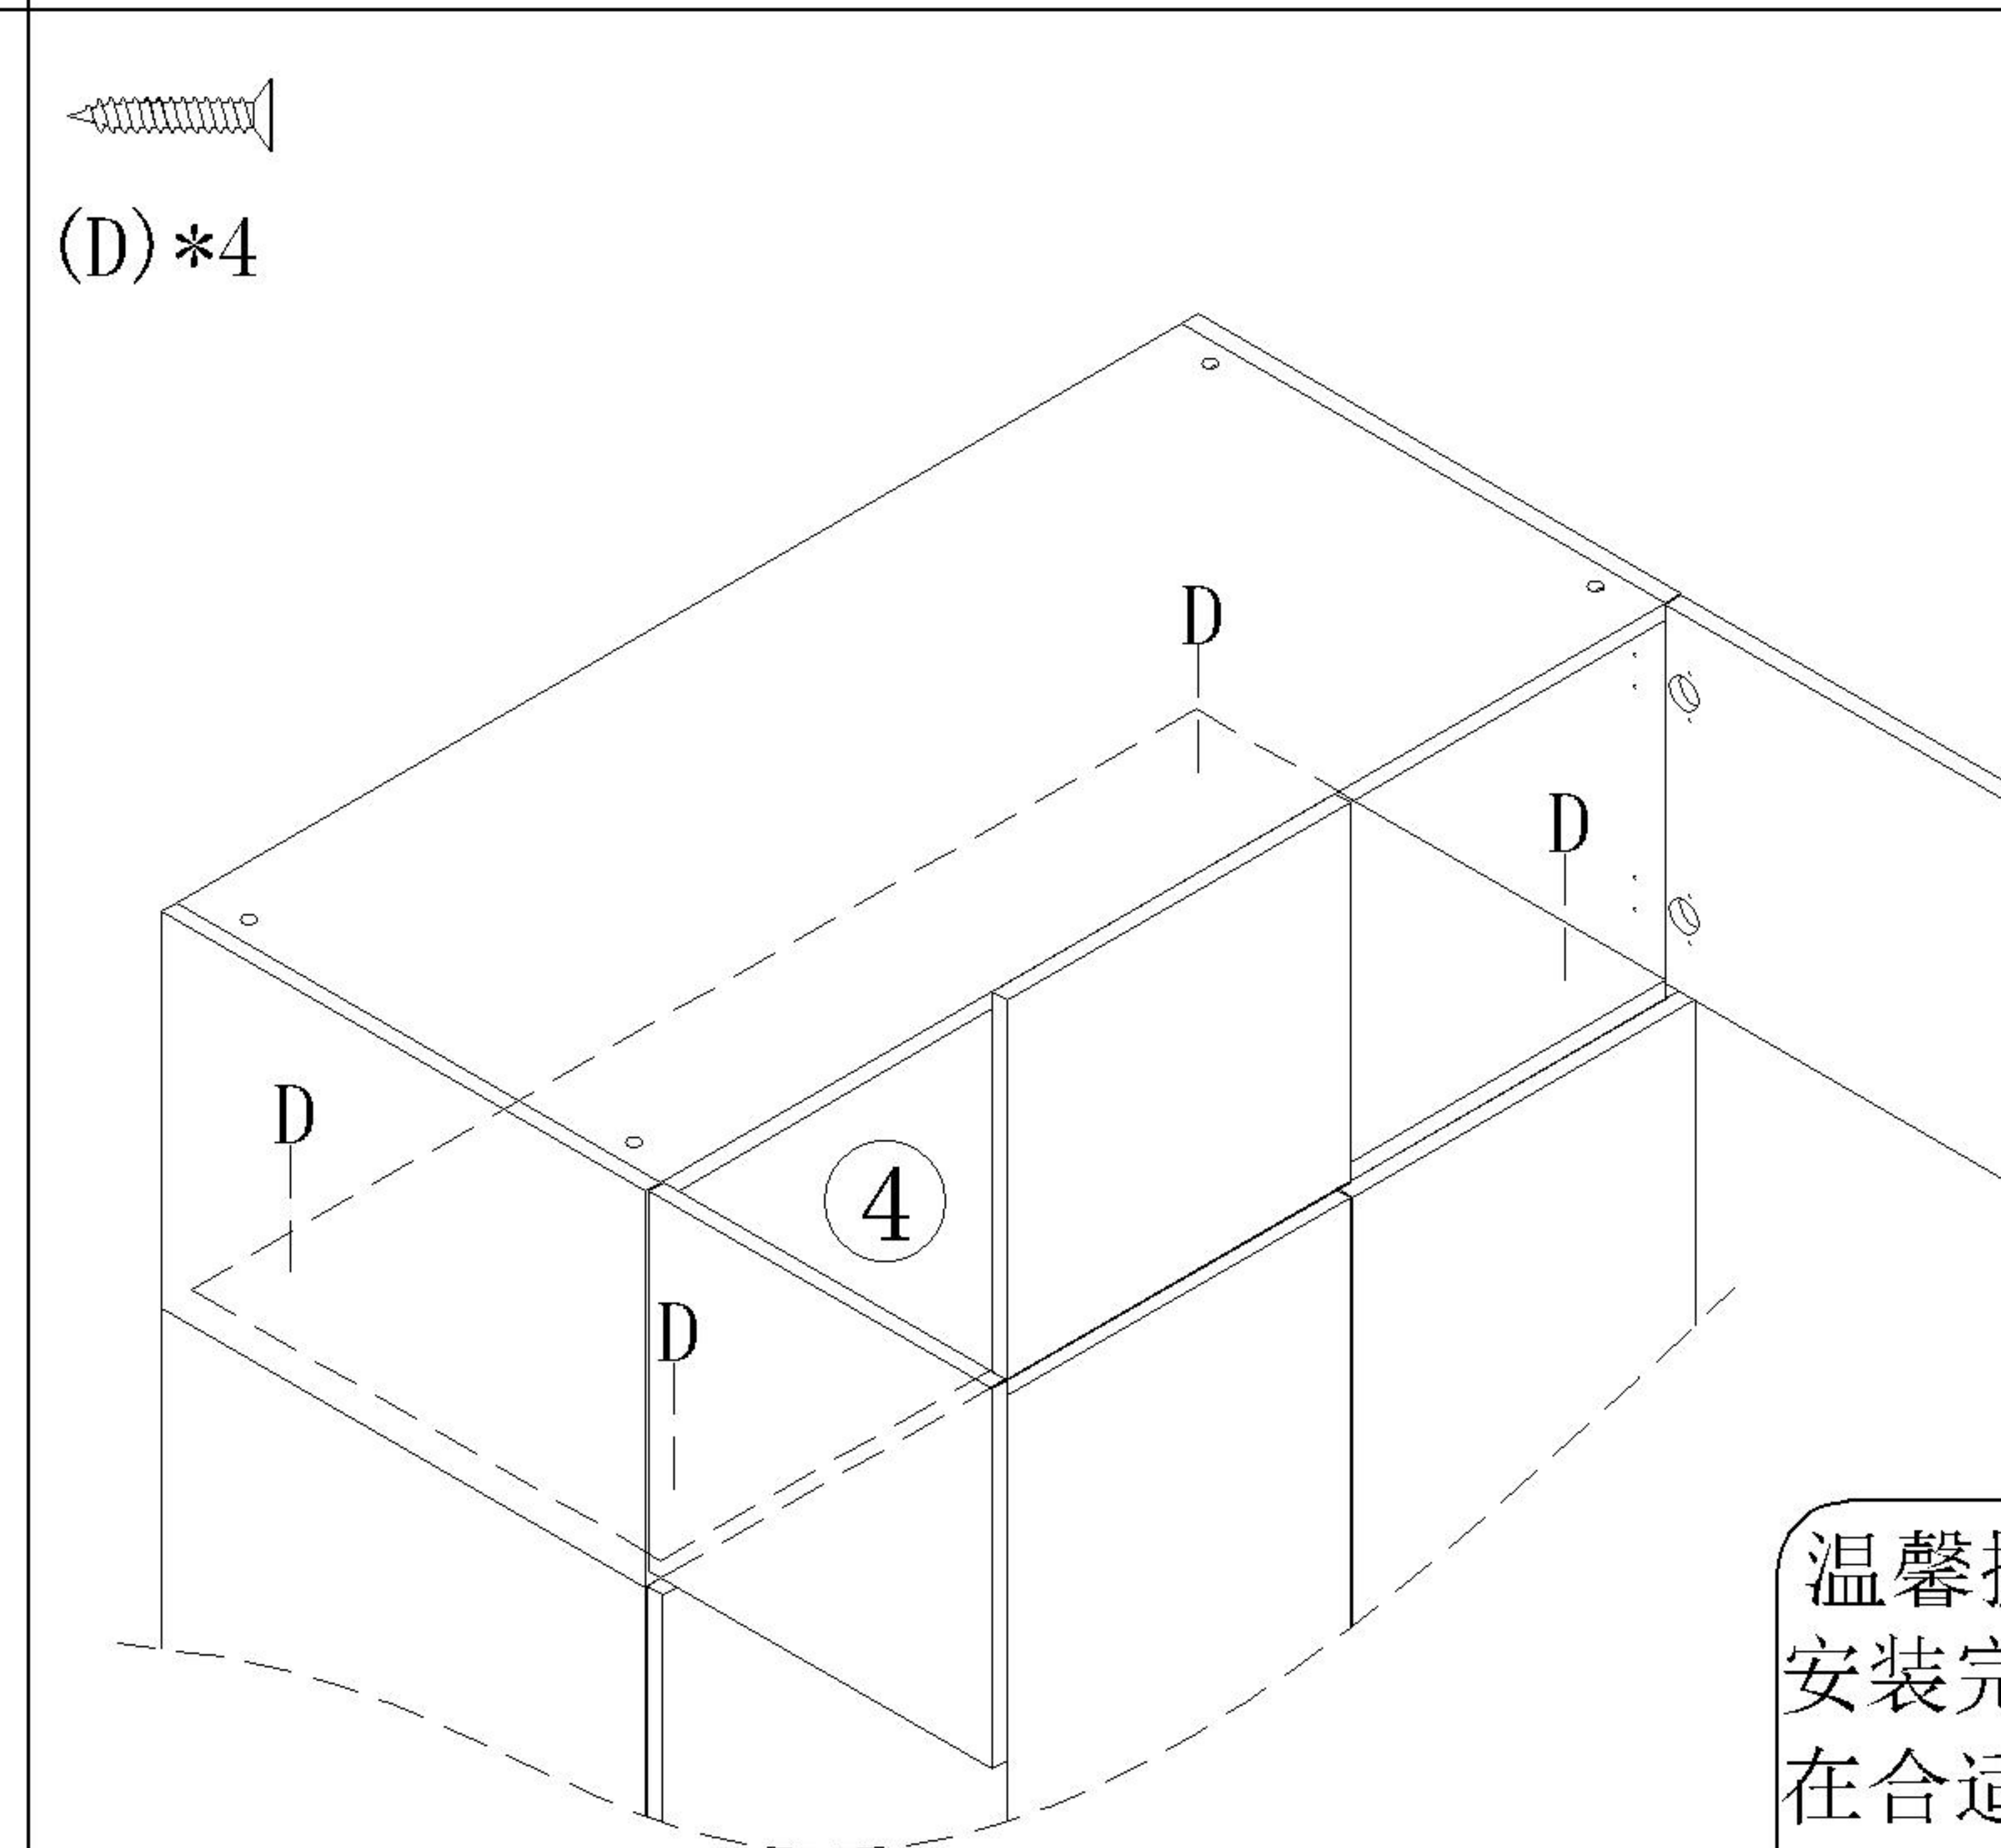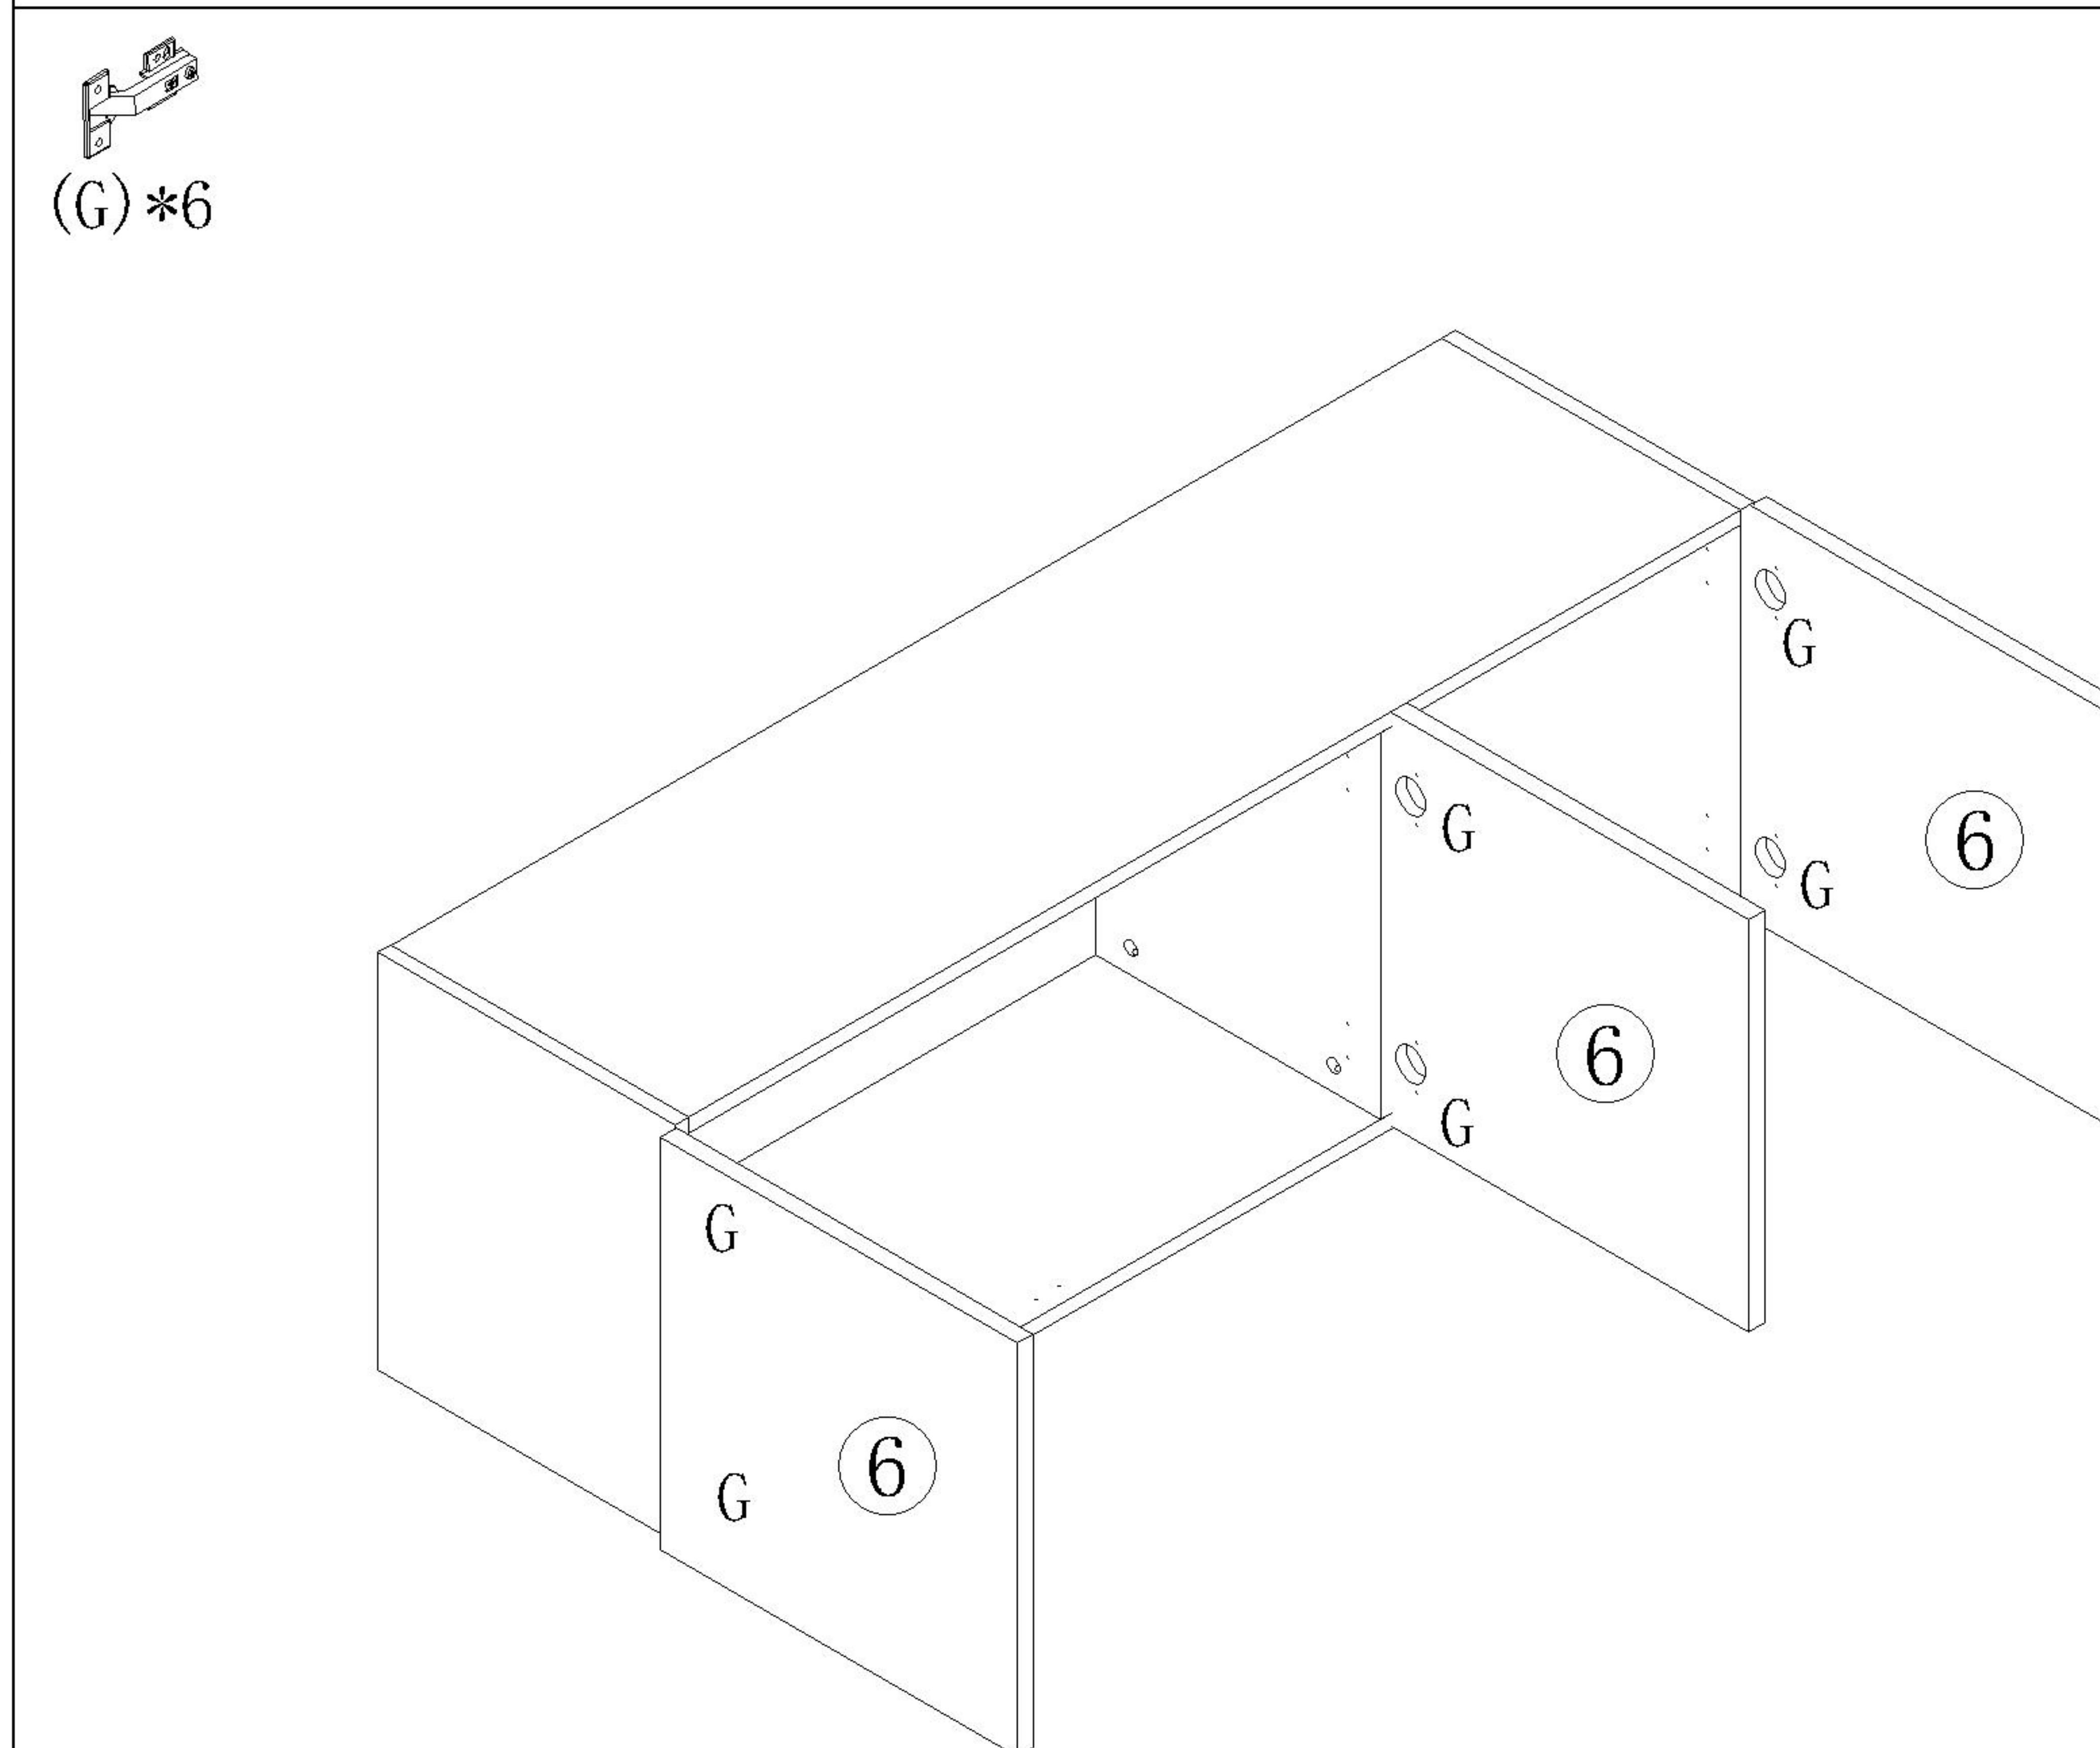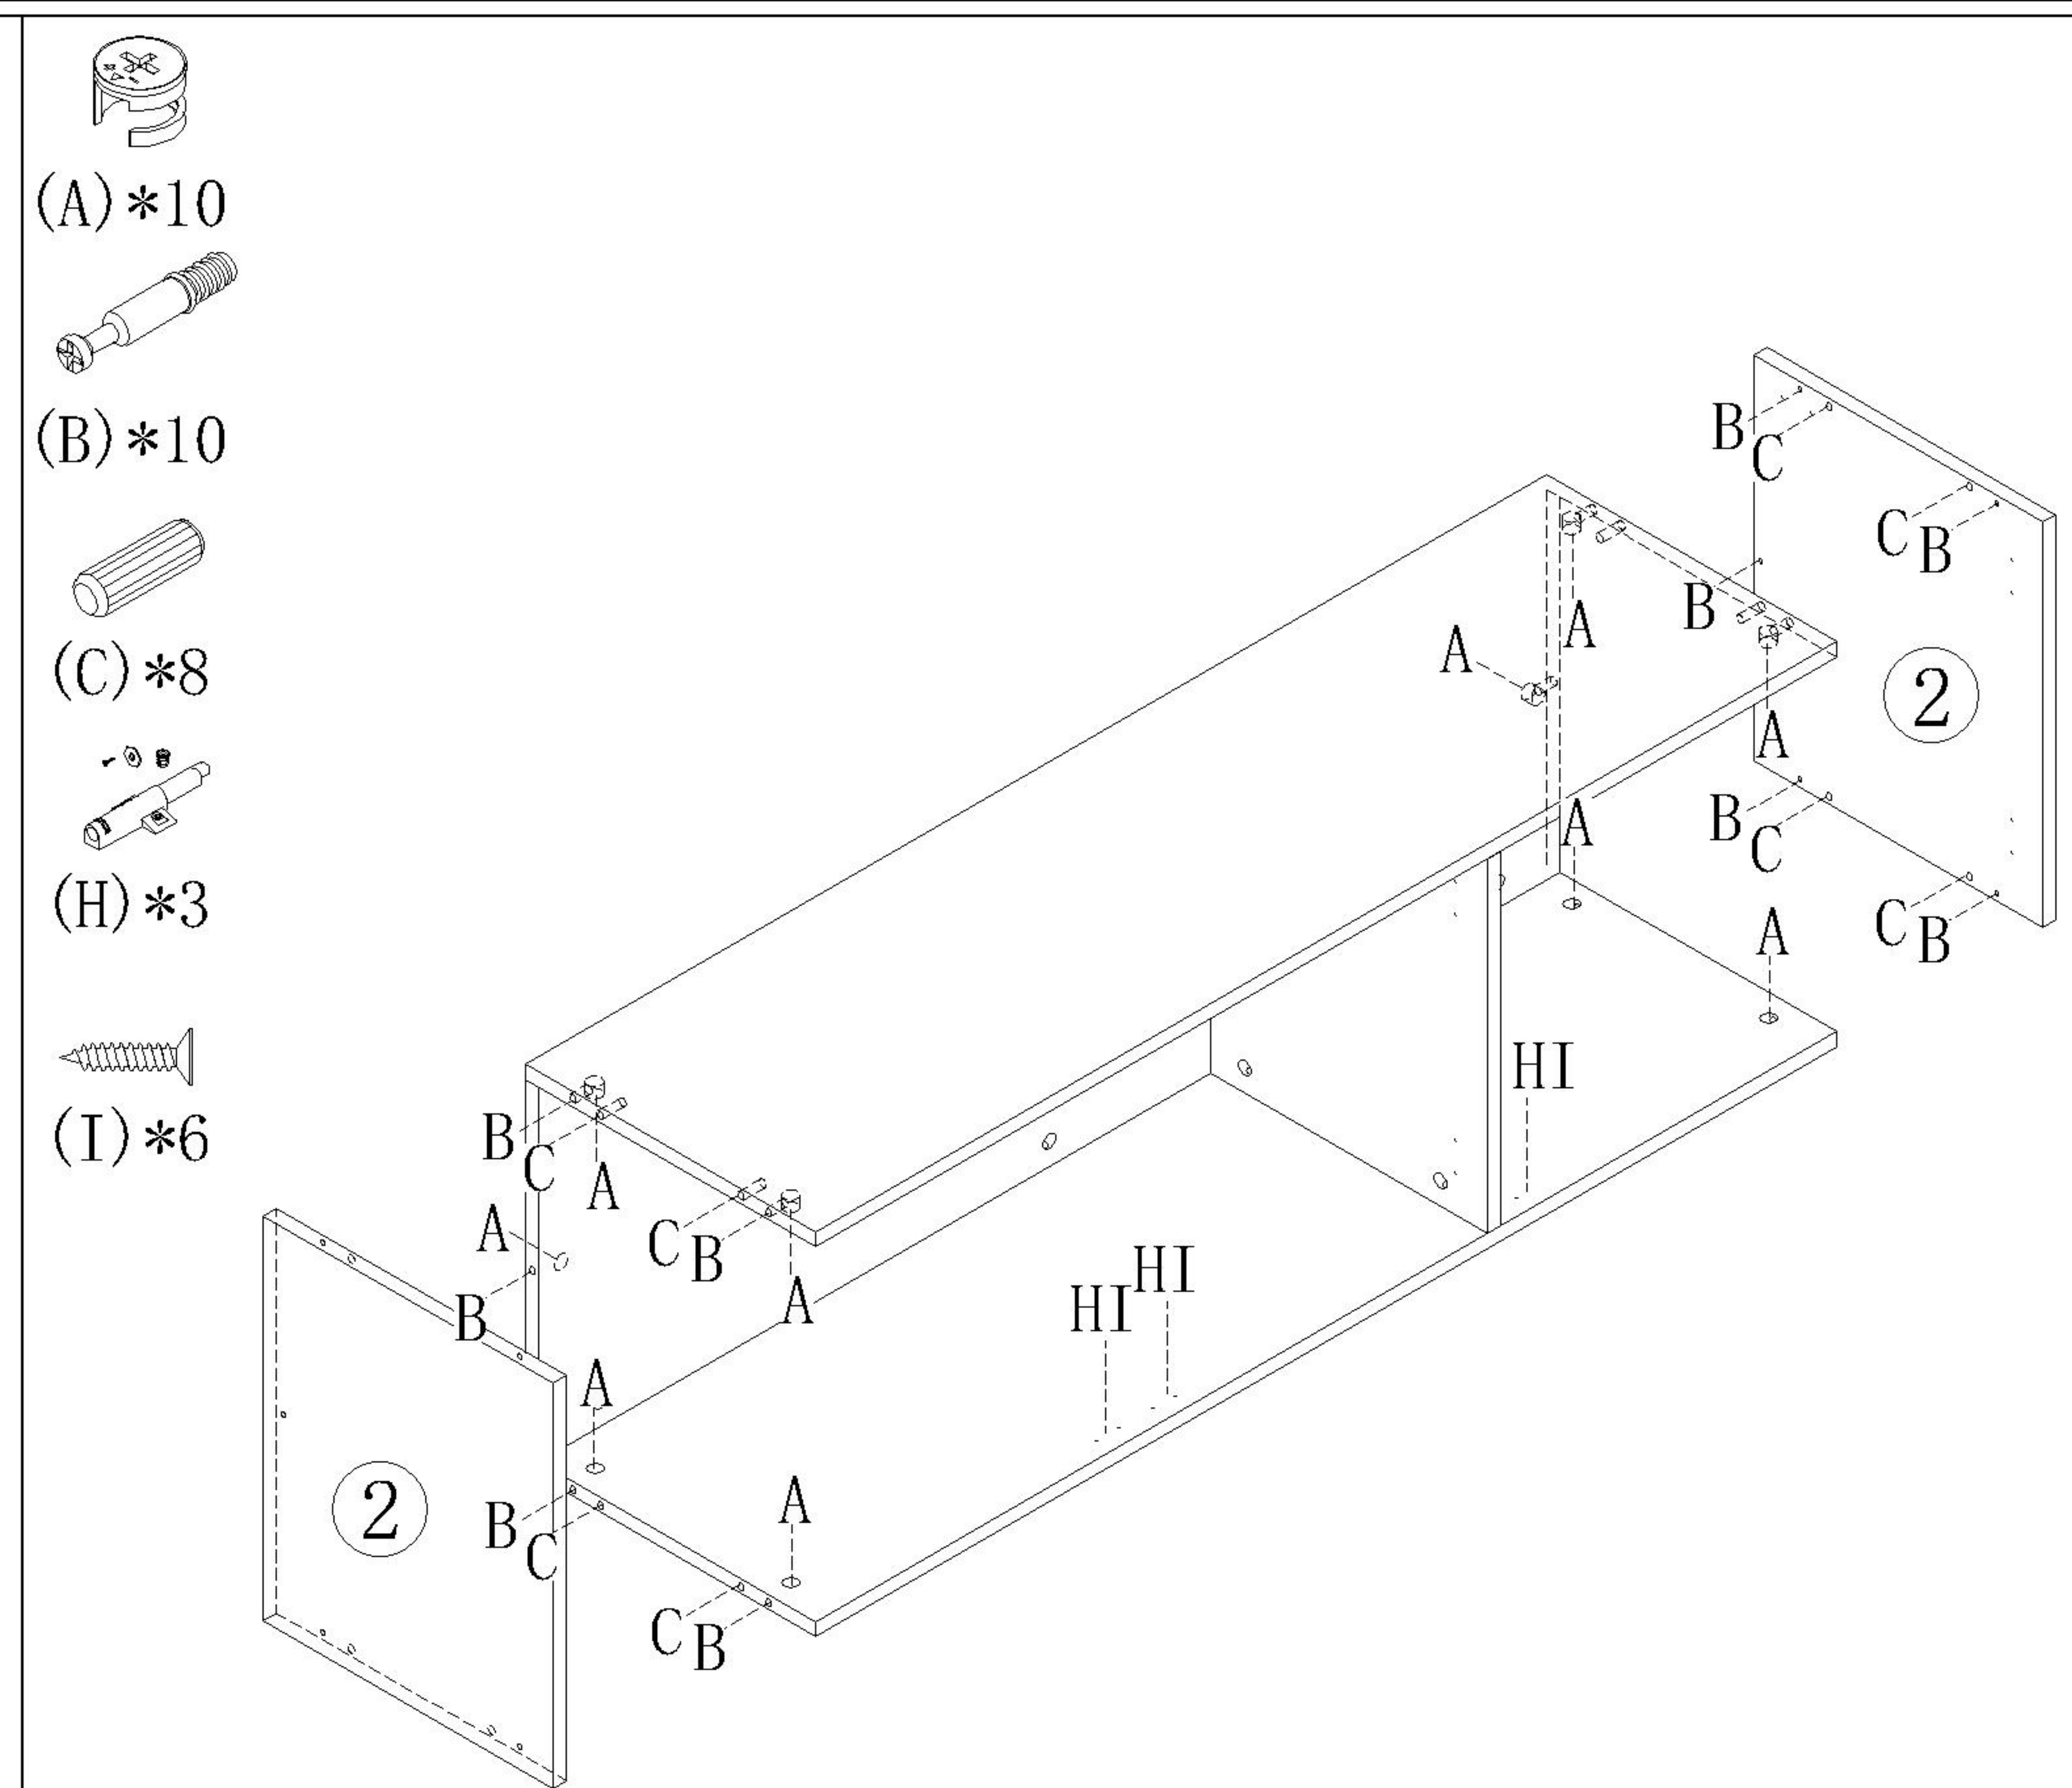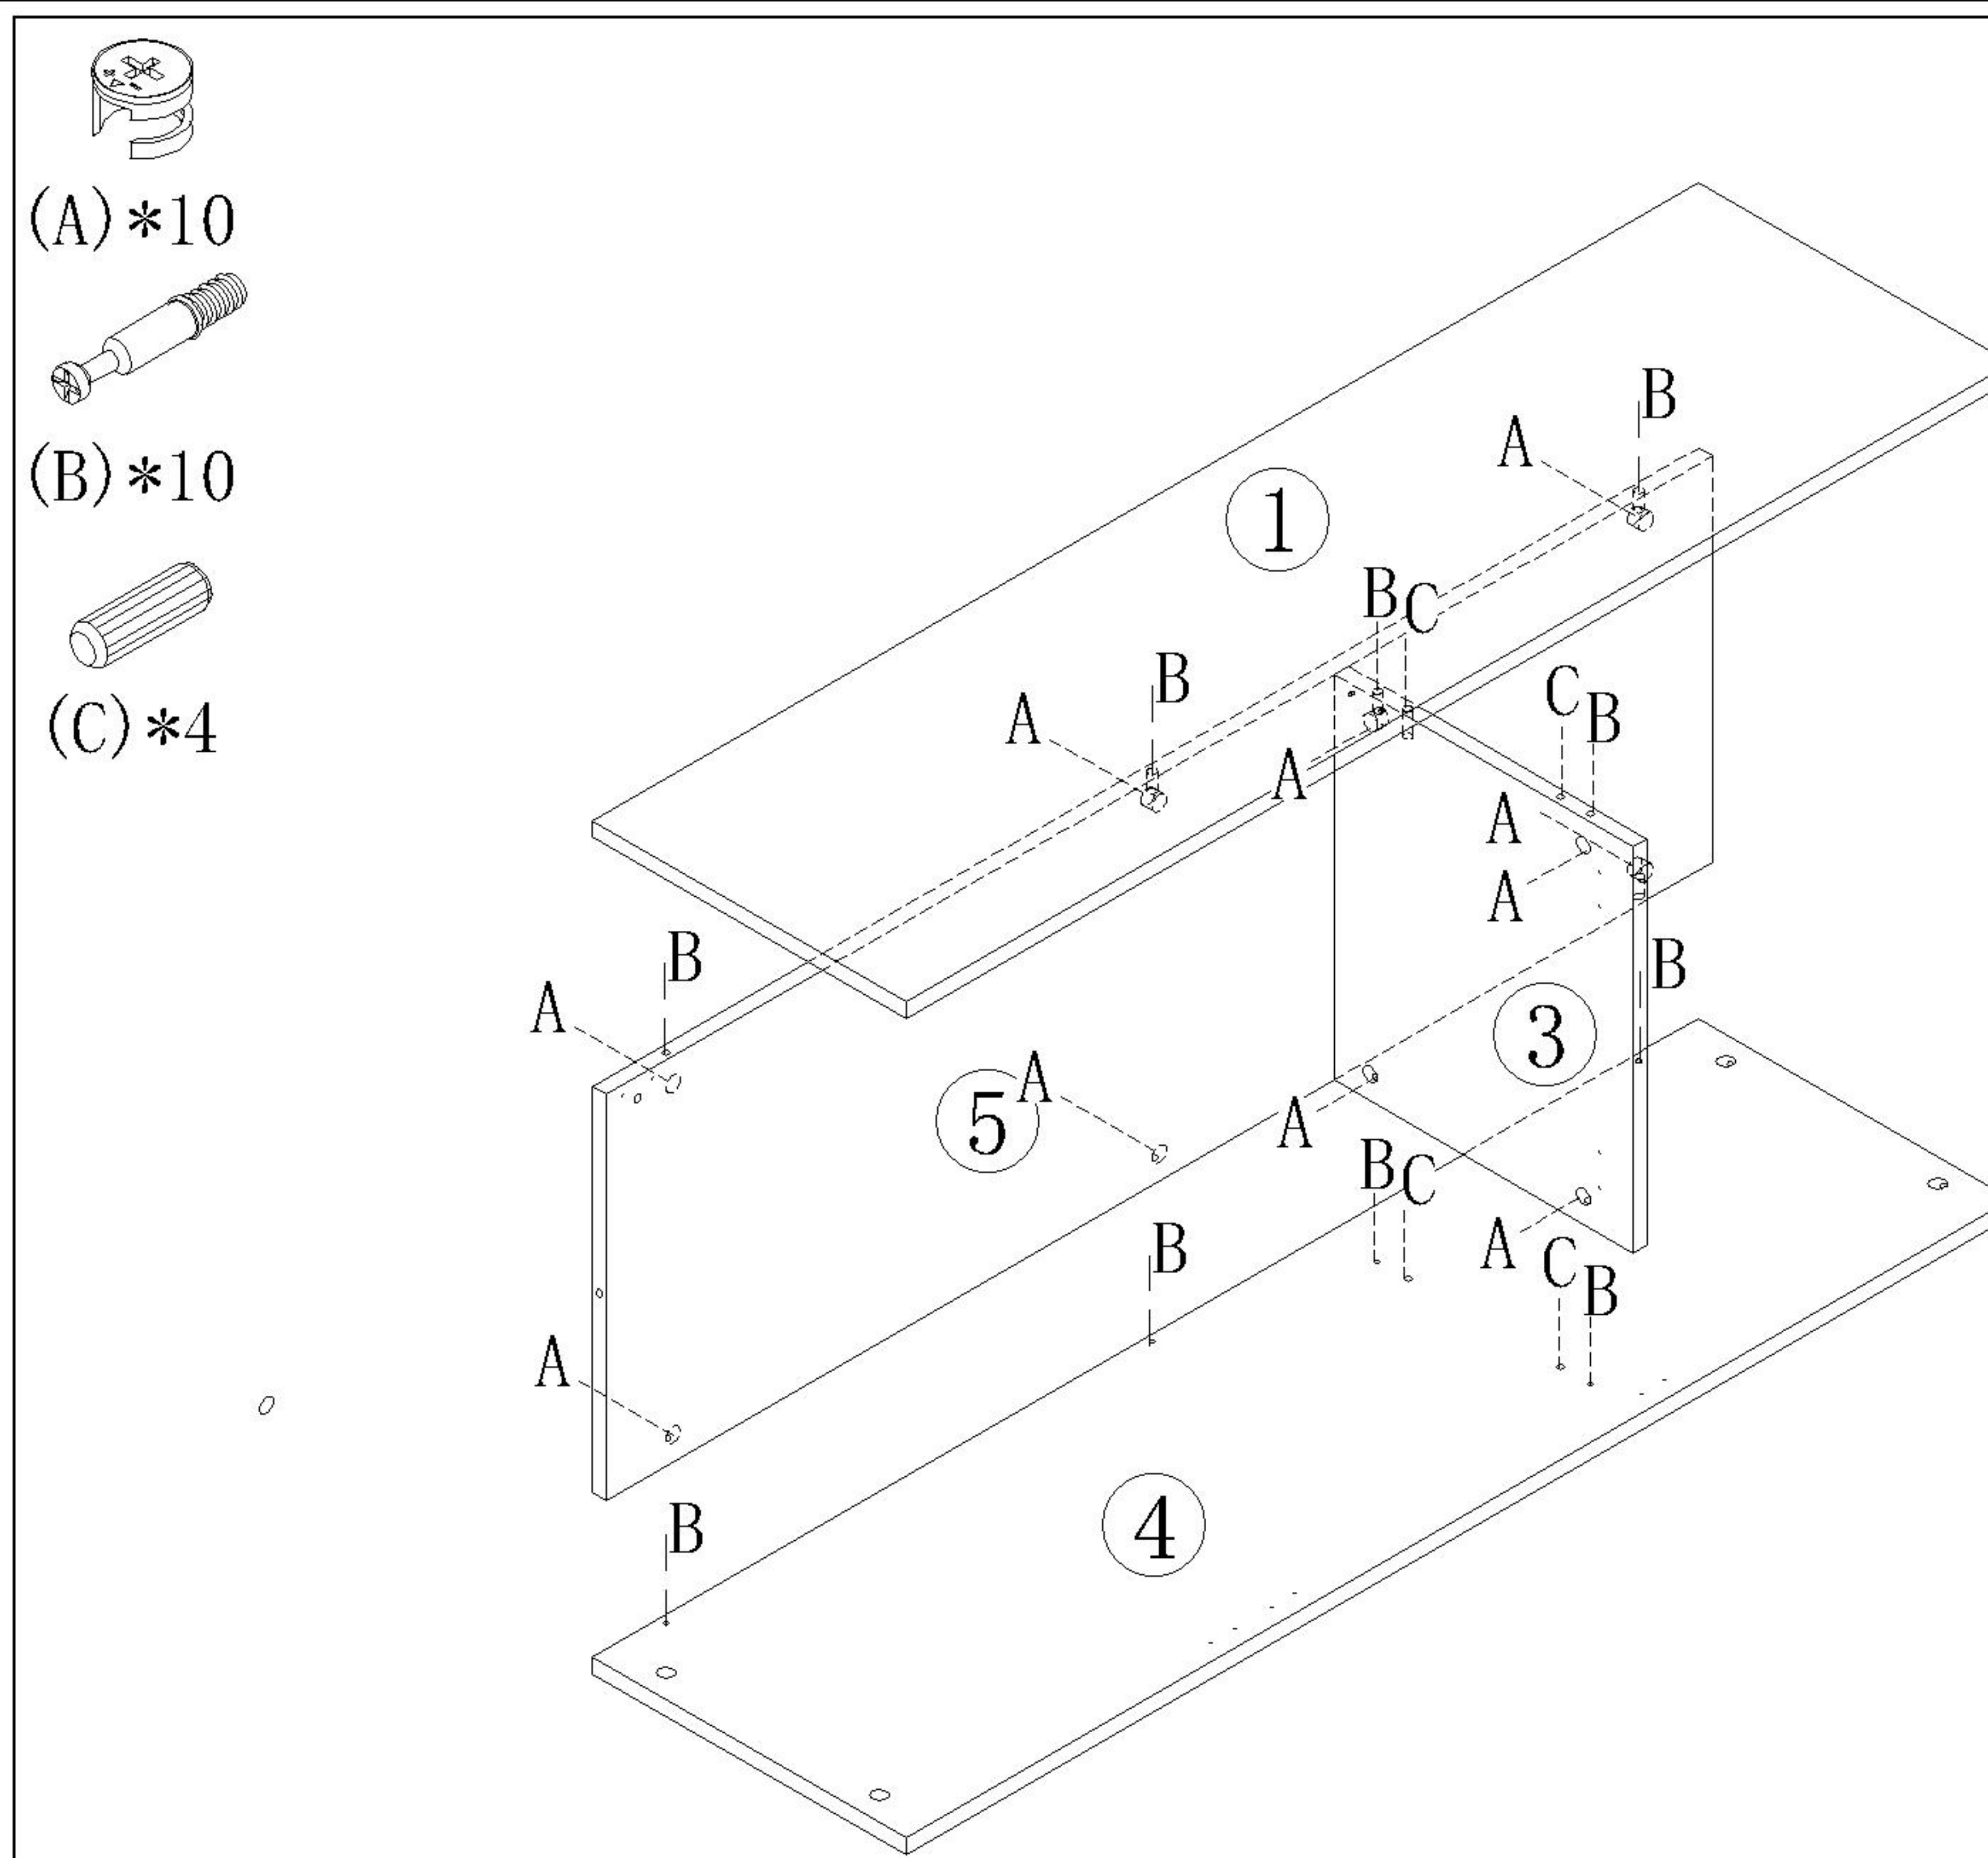

安装方法1
Installation
Method 1

温馨提示:
安装完成后, 与要组合柜子在
合适的位置用五金D锁紧
Tips:
After installation,
lock the cabinet in
place with hardware D


安装方法/
Installation method

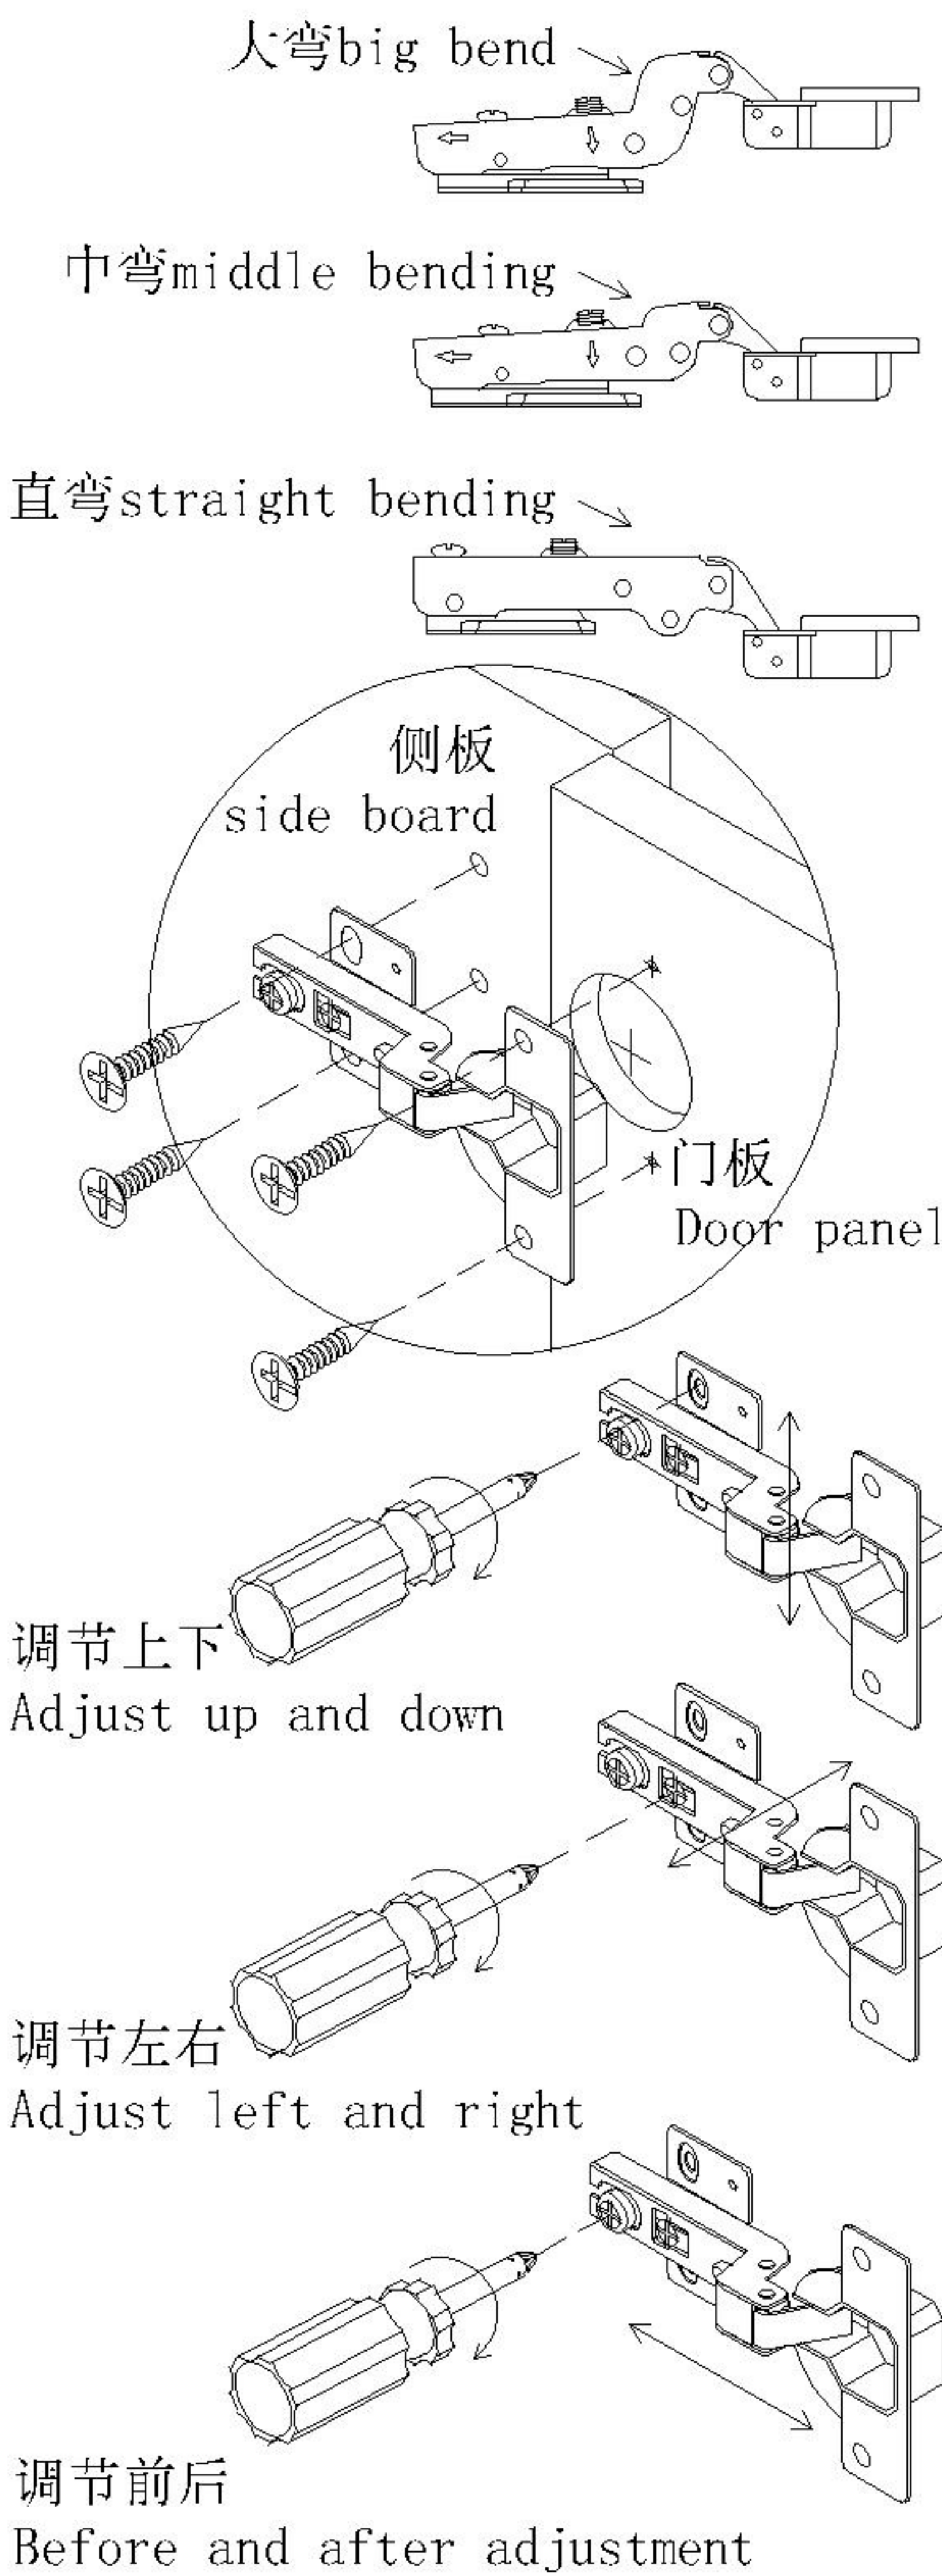

门铰 Hinge

- (I)*24
- (J)*3
- (F)*3
- (K)*3
- (E)*3

安装方法2
Installation Method 2

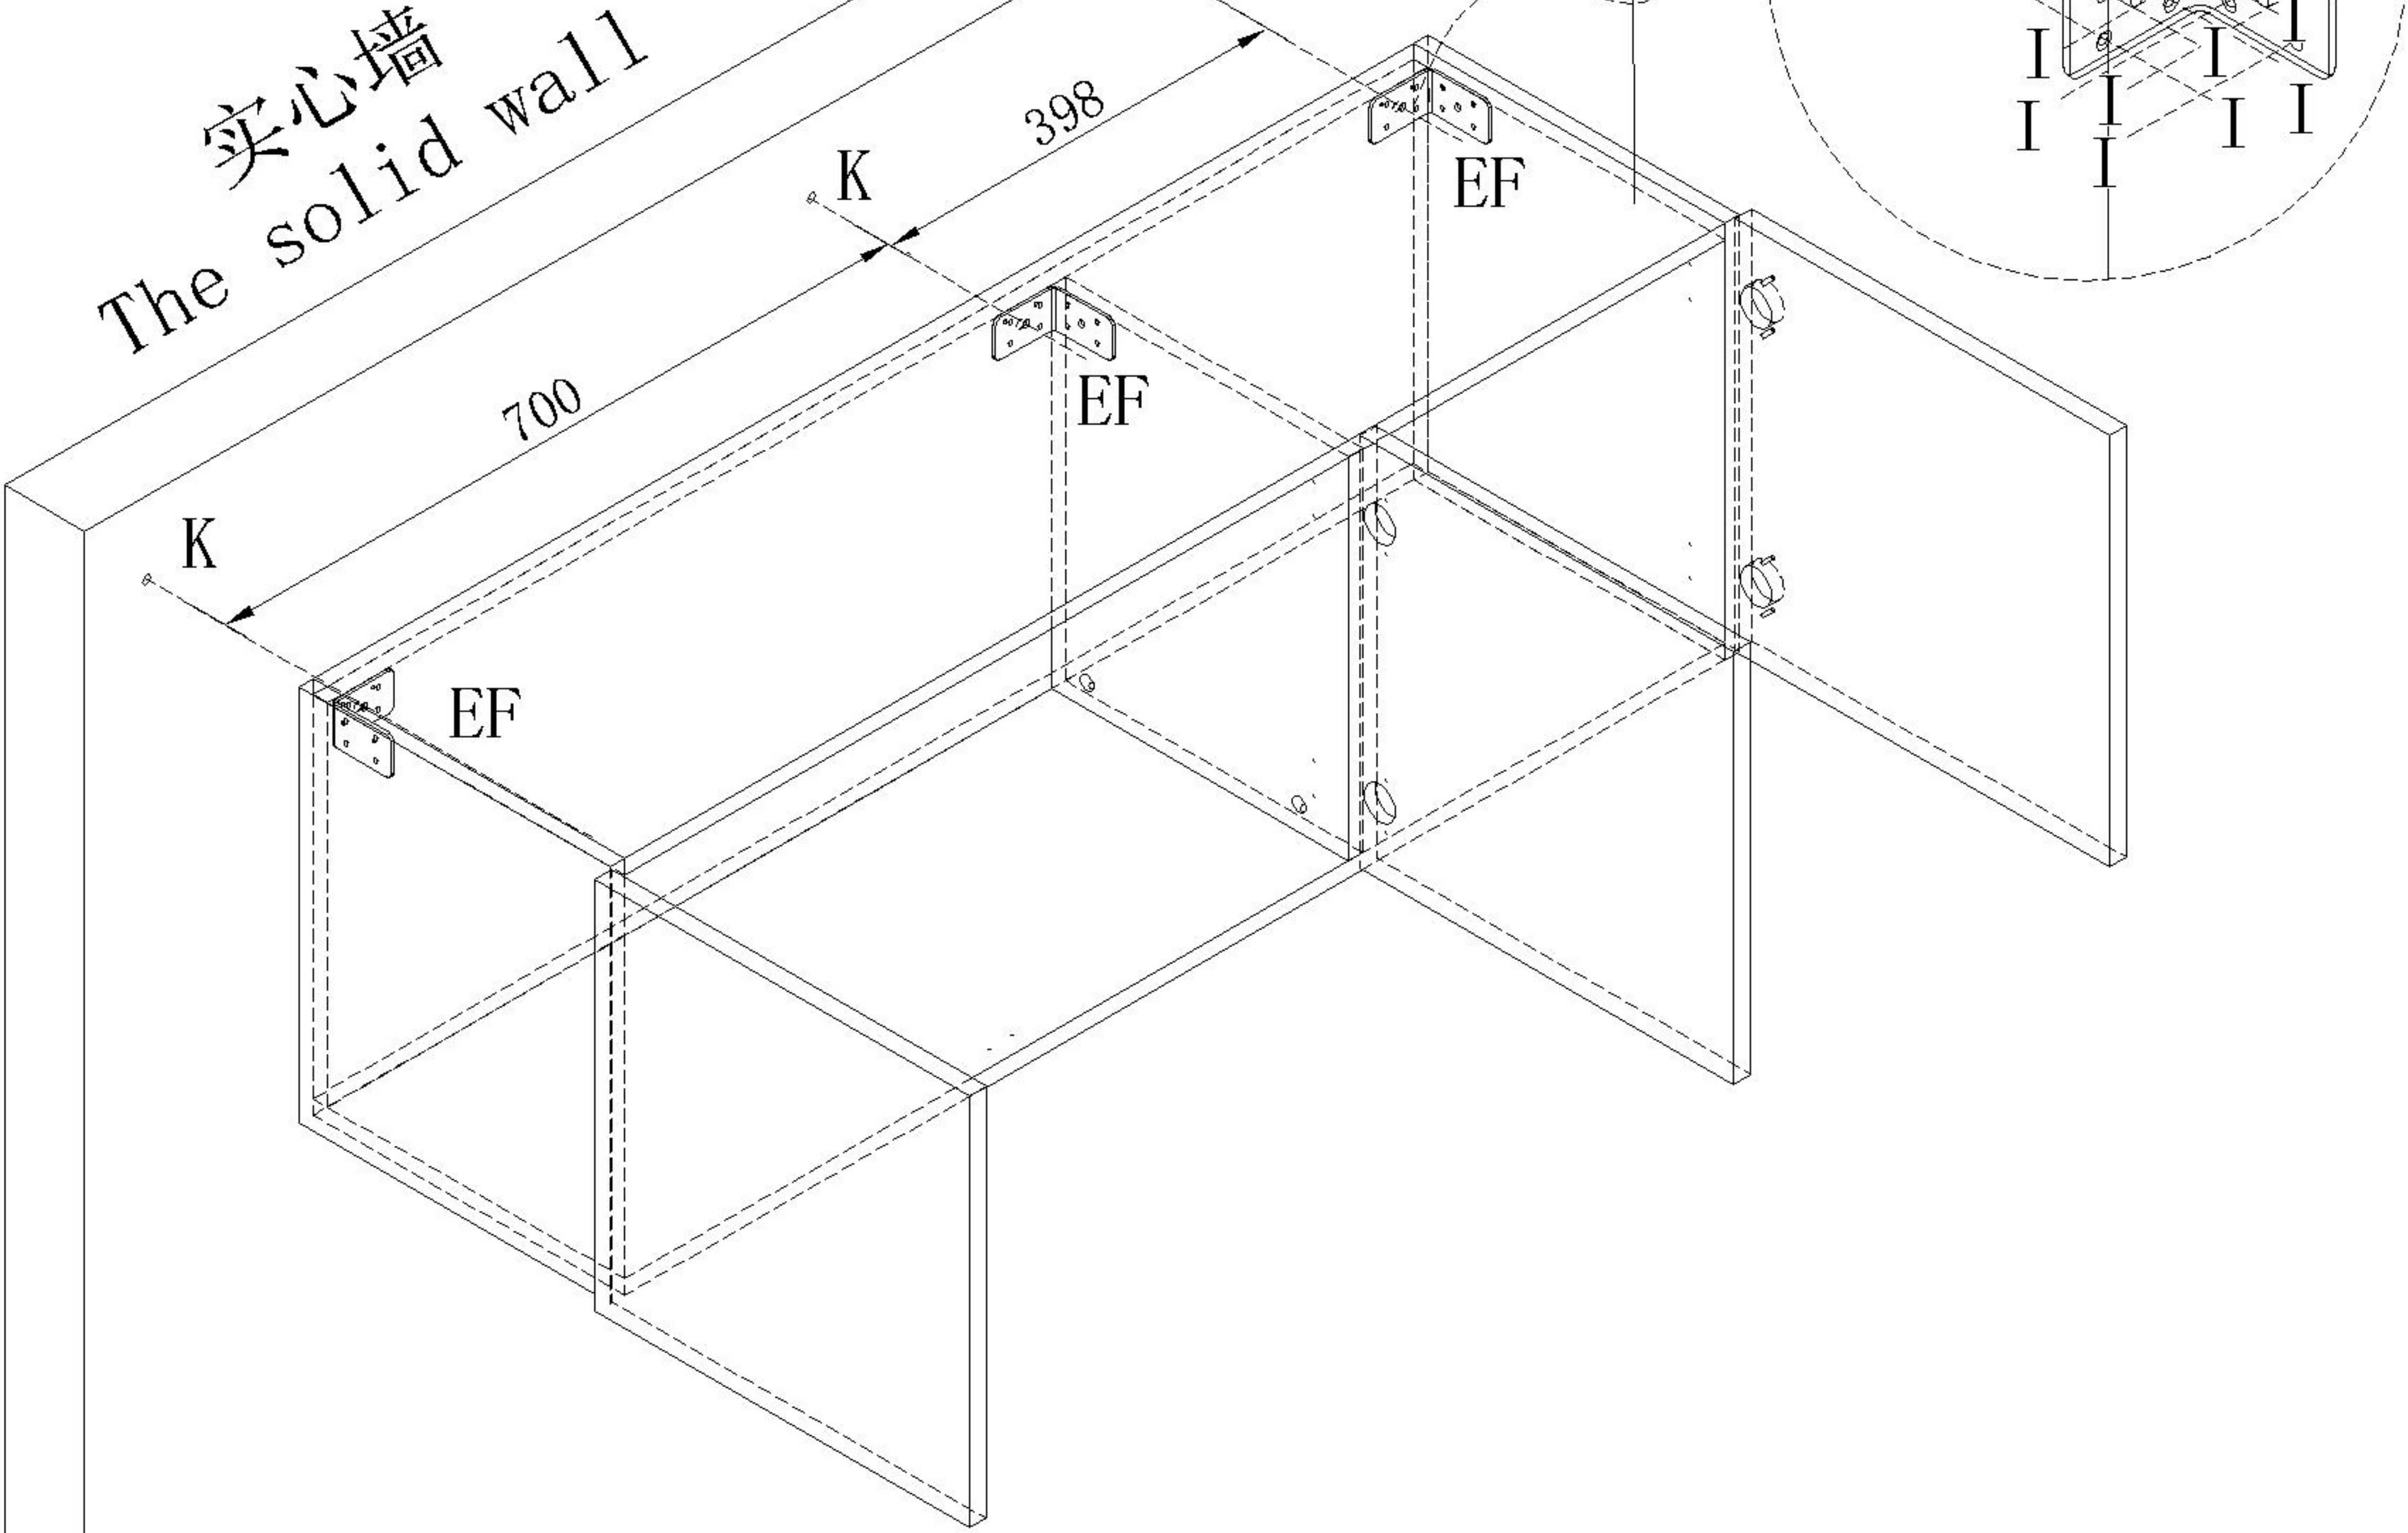

请根据需要选择安装方法1或者2
Select installation method 1 or 2 as required

注意：实心墙厚度应不少于120mm，以防打穿
Note: The thickness of the solid wall should not be less than 120mm to prevent penetration

用冲击钻在墙体同一水平位置打 $\phi 8*85\text{mm}$ 孔，将柜体安装在墙体的合适位置，图为孔之间的距离
Punch $\phi 8*85\text{mm}$ holes at the same horizontal position of the wall with the impact drill, and install the cabinet at the appropriate position of the wall. The figure shows the distance between the holes