

Straight Blade Devices

15A, 125V, 2 Pole, 3 Wire Grounding

HBL<sup>®</sup> Extra Heavy Duty MAX Specification Grade Single Receptacle

- Features
- One-piece nickel plated brass integral ground strap
  - Unique bypass contact design

Ordering Information

Description	Device Color	UPC Number	Catalog Number
Weather and corrosion resistant	Yellow	783585808260	HBL52CM61

Listings

UL Listed to UL498 File No. E2186  
Certified to CSA 22.2, No. 42 File 285  
Fed. Spec. W-C-596  
NEMA<sup>®</sup> WD-6 Compliant

Specifications


Face	Nylon
Base	PBT
Power Contacts	.037 in. (.9) Nickel plated brass
Ground Contact	Brass
Mounting Strap	.050" (1.3) Nickel plated brass
Auto Self-grounding Clip	Stainless steel
Mounting Screws	Stainless steel

Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
<b>Environmental</b>	
Flammability	Top: UL 94V-2, Base: UL 94V-0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)



15A 125V AC  
NEMA 5-15R  
UL CSA  
0.5 HP

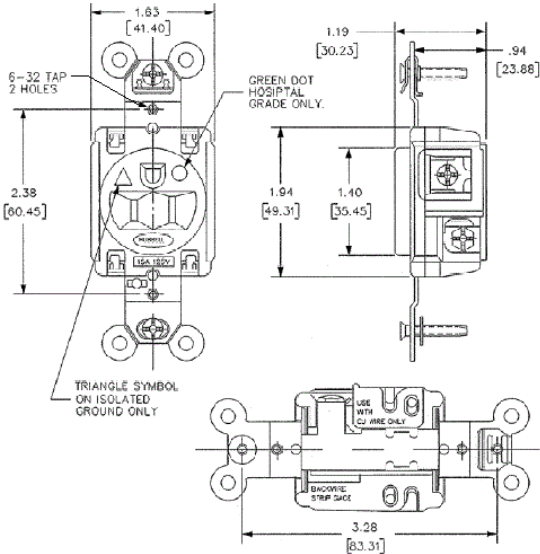

Complementary Products

Wallplate or Weatherproof Cover	1.40" Opening
---------------------------------	---------------

Online Resources

Customer Sales Drawings  
eCatalog  
Installation Instructions

