

Midget Twist-Lock® Devices
 15A, 125V AC, 2 Pole, 3 Wire Grounding
 Valise® Plug

HUBBELL

Features

- Fully insulated, abuse resistant nylon housing
- Insulation displacement terminals reduce wiring time
- Insulation displacement terminal
- Totally insulated body adds extra measure of safety



Ordering Information


Description	Cord Diameter	UPC	Catalog Number
Black Valise® plug.	.300"-.430" (7.6-10.9)	783585237787	HBL7594V

Listings

Listed to UL 498
 Certified to CSA C22.2 No.42
 Fed Spec W-C-596

Specifications

Housing	Nylon
Blades	Brass
Insulation Displacement Terminals	Brass
Body Holding Screws	Steel - Zinc plated

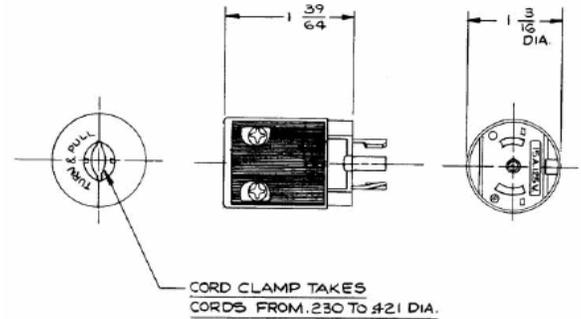

Performance

Electrical

Current Interrupting Certified for current interrupting at full rated current
 Dielectric Voltage Withstands 2,000V minimum

Mechanical

Terminal Accomodation #18 AWG - #14 AWG stranded copper wire only.
 Terminal Identification Terminals identified in accordance with UL 498

Environmental

Flammability HB or better per UL94/CSA 22.2 No.0.17
 Moisture Resistance IP20 Suitability
 Operating Temperatures Maximum Continuous 75°C Minimum -40°C (w/o impact)

Accessories

Valise® Connector	HBL7593V
Nylon Flanged Receptacle	HBL7596N
Stainless Steel Flanged Receptacle	HBL7596
StainlessSteel Flanged Receptacle with Covered Terminals	HBL7598

Resources

Customer Use Drawing
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

