

PRODUCT DATA SHEET



PART NUMBER – BLC1F800G7: BRAH Electric, aftermarket direct replacement contactors for Telemecanique LC1F800G7, TeSys F Series, type LC1F, 3P, 3PH, 1000A, 600V, 450HP @ 240V, 800HP @ 480V, 900HP @ 600V, complete with 120V AC coil, AC magnetic contactor, suitable for use with LC1-F series motor control systems



PRODUCT SPECIFICATIONS

MAGNETIC CONTACTOR
PART NO. BLC1F800G7


TYPE	VALUE (UNITS)	NOTES	COMMENTS
PHASE	3		
POLES	3		
VOLTAGE	600 (VAC)		
AMPERAGE	1000 (A)		
COIL VOLTAGE MIN	120 (V)		
COIL VOLTAGE MAX	120 (V)		
MIN HP. RATING	450 (HP)	@ 240V	
MAX HP RATING	900 (HP)	@ 600V	

Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of one year, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

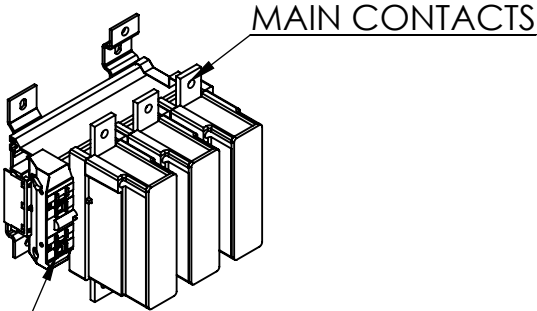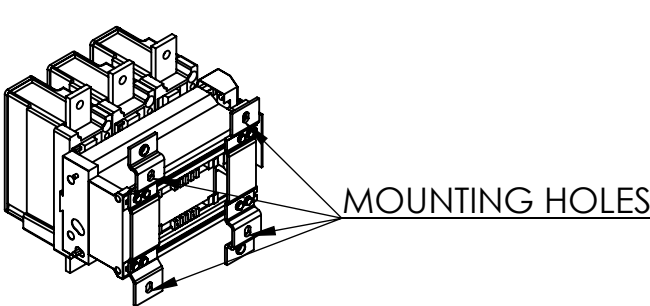


STOPS FOR ATTACHING FRONT MOUNTED ACCESSORIES

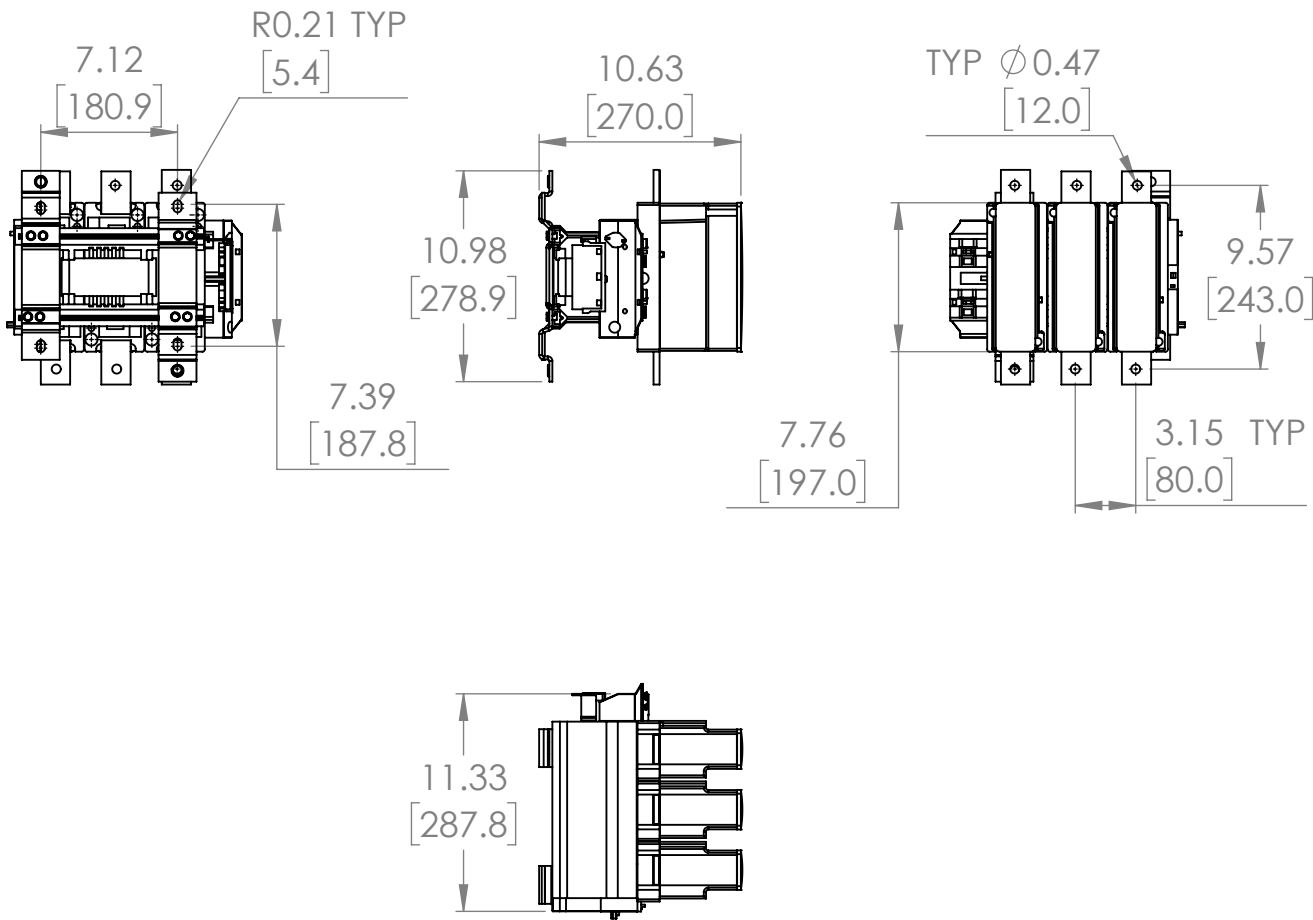

WWW.BRAHELECTRIC.COM, 855-355-2724

*NOTE: BRAH ELECTRIC CONTACTOR BLC1F800G7 IS AN AFTERMARKET DIRECT REPLACEMENT FOR TELEMECANIQUE LC1F800G7, TESYS F SERIES, TYPE BLC1F. SUITABLE FOR USE WITH LC1-F SERIES MOTOR CONTROL SYSTEMS

 THIRD ANGLE PROJECTION	UNLESS OTHERWISE NOTED				
	ALL DIMENSIONS ARE IN INCHES METRIC UNITS ARE DISPLAYED BENEATH IN [MM.]		MAGNETIC CONTACTOR		
	MATERIAL MOLDED PLASTIC CASE				
	FINISH N/A		SIZE A	DWG. NO. BLC1F800G7	REV. A
DO NOT SCALE DRAWING		SCALE:1:10		WEIGHT:	SHEET 1 OF 1

SCALE:1:10	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------