
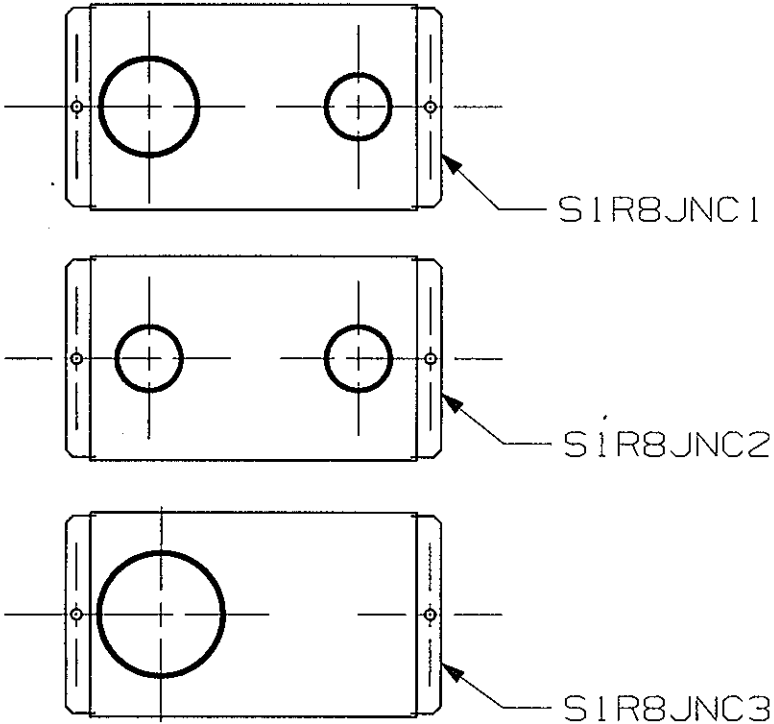


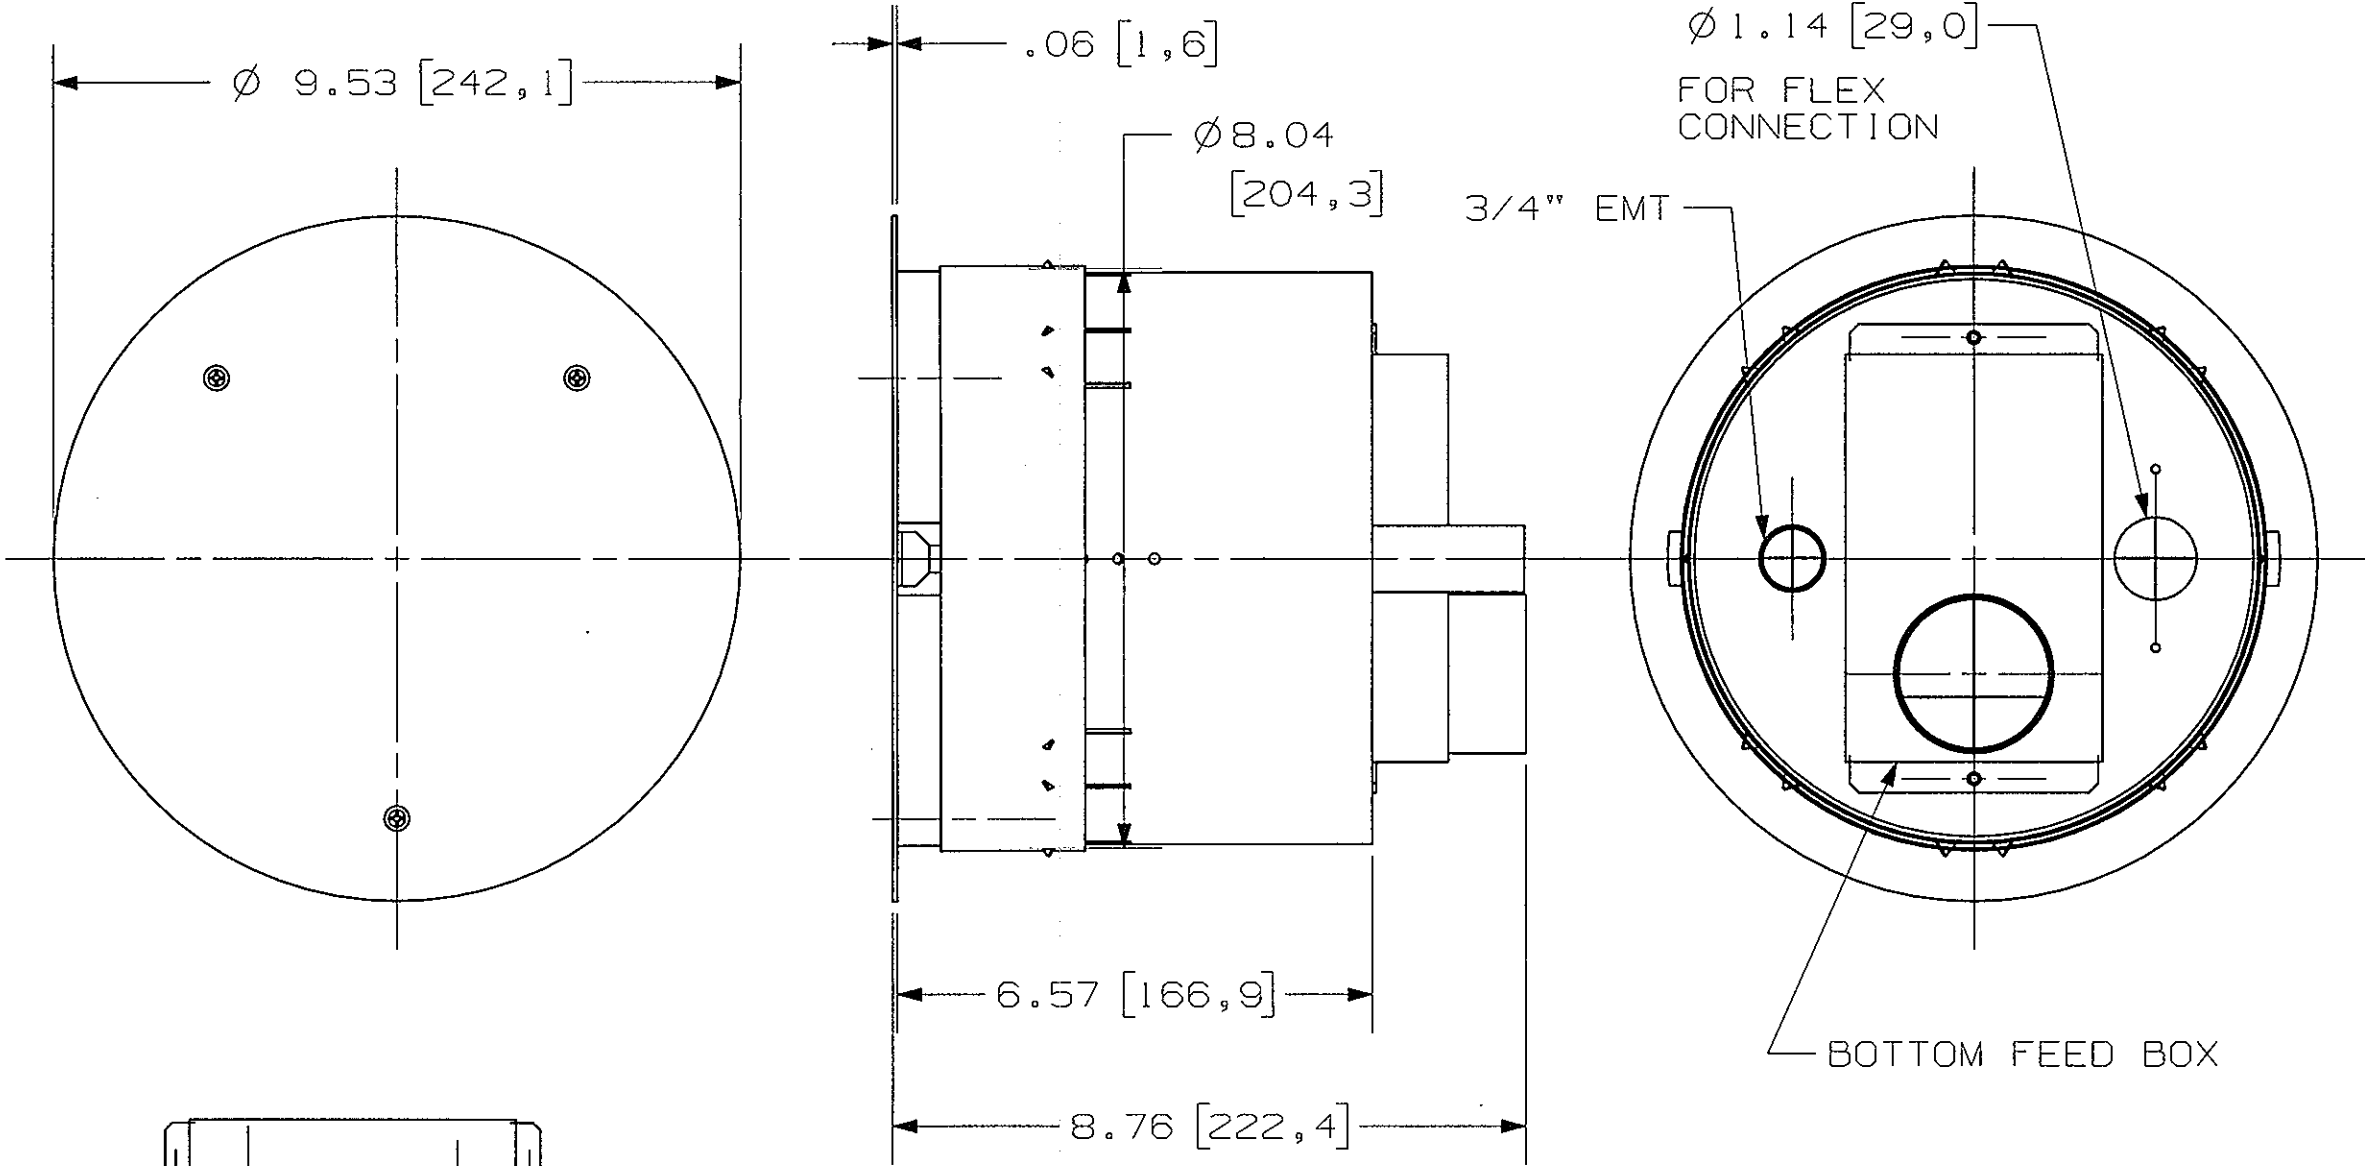

CATALOG NUMBER	BOTTOM FEED CAT. NO.	BOTTOM FEED CONDUIT SIZES
SIR8PTFIT1	SIR8JNC1	1" & 1-1/2 EMT
SIR8PTFIT2	SIR8JNC2	(2) 1" EMT
SIR8PTFIT3	SIR8JNC3	2" EMT

NOTES:
1) ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
2) ALL DIMENSIONS ARE COMMON TO ALL CATALOG NUMBERS. BOTTOM FEED BOXES VARY AS SPECIFIED.
3. ALL UNITS ARE SHIPPED WITH JUNCTION BOX SUB-ASSY (SIR8JNCBOX) SHIPPED LOOSELY. SEE M-11989 FOR DIMENSIONS.

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
CAN WELDMENT	STEEL	ZINC PLATE
INSTALLATION PLATE	STEEL	ZINC PLATE
SUB-PLATE MTG. PLATE	STEEL	WHITE PAINT
STANDOFFS	STNLS. STL.	ZINC PLATE
FIRE BARRIER, UPPER	FIRE BAR. MATL.	NATURAL
FIRE BARRIER, LOWER	FIRE BAR. MATL.	NATURAL
WASHERS	FIBER	RED
MOUNTING SCREWS	STEEL	ZINC PLATE
DIVIDERS	STEEL	ZINC PLATE
SPACER	FIRE BAR. MATL.	BLACK
TAPE	PLASTIC	YELL./BLK.

REPAIRABLE ☐ NON-REPAIRABLE ☒			
3	UPDATED IMAGES DCN20245	AD	12/13/13
2	UPDATED IMAGES DCN18755		4/13/12
1	RELEASED PER DCN18435		12/14/11
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE		SERVICE FITTING, FIRE RATED POKE THROUGH, 8 INCH DIAMETER	
TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
.XX : ±.01		DR. BY SRE	APP. BY
.XXX : ±.005		TR. BY	SCALE 1:2
ANGLES : ±2°		CHK. BY	DATE 6/10/11