

Switches, Single Pole  
15A, 120-277V AC  
SNAPConnect® Heavy Duty Style Line®  
Decorator Switches

HUBBELL

Features

- Steel, zinc plated bridge is corrosion resistant
- Thread cleaning captive mounting screw
- Self-grounding staple assures continuity to wall box

Ordering Information

|                        |              |              |                |
|------------------------|--------------|--------------|----------------|
| Description            | Toggle Color | UPC          | Catalog Number |
| SNAPConnect®<br>Rocker | Light Almond | 783585189574 | SNAP2101LANA   |

Listings

UL Listed  
CSA Certified

Specifications

|                 |                      |
|-----------------|----------------------|
| Top Material    | Thermoplastic, Blue  |
| Base Material   | Thermoplastic, Black |
| Rocker Material | Thermoplastic        |
| Contacts        | Silver Alloy         |
| Terminals       | Brass                |

Performance


|                         |                                                |
|-------------------------|------------------------------------------------|
| Electrical              |                                                |
| Dielectric Voltage      | Withstands 1500V AC minimum for 1 minute       |
| Max. Continuous Current | 15A                                            |
| Max. Working Voltage    | 277V AC                                        |
| Overload                | Minimum 4.8 times rated current for 100 cycles |
| Temperature Rise        | 30°C maximum at rated current                  |

Mechanical

Terminal Accommodations Uses SNAPConnect Connector

Environmental

|                       |                                                              |
|-----------------------|--------------------------------------------------------------|
| Flammability          | UL 94V-2                                                     |
| Operating Temperature | Max. continuous: 75°C; Min. continuous: -40°C without impact |

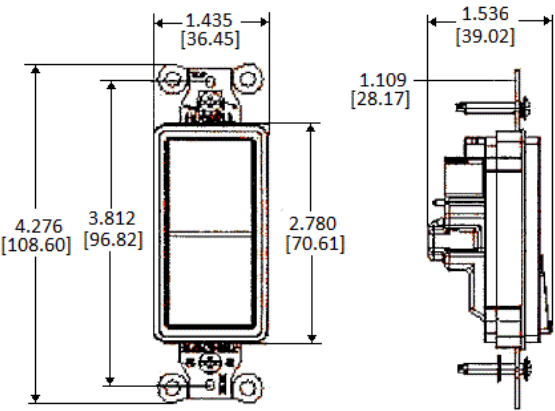

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

