www.brahelectric.com





FUSEBLOCK206

BUS PLUG part known as the load block or fuse block. This is a direct preplacement for GE style bus plugs and will fit All Spectra series, Spectra low amp, Armor Clad and Flex-A plug Bus Plugs.

Product Specifications

Description	Specs
Max Volts	240V
Continuous Current	60A
No. of Phases	3
No. of Poles	3
Max HP	15 HP

Mechanical Data:

Molded Plastic Base


Type: Load Block for use in GE OEM Bus Plugs

NOTE: This load block can be used in all BRAH Electric Bus Plugs.

Other Configurations include:

BRAH Part #	GE, OEM part #	VOLTAGE	AMPS	Horse Power
FUSEBLOCK203	N/A	240V	30A	7.5 HP
FUSEBLOCK603	N/A	600V	30A	20 HP
FUSEBLOCK206	N/A	240V	60A	15 HP
FUSEBLOCK606	N/A	600V	60A	50 HP
FUSEBLOCK210	N/A	240V	100A	30 HP
FUSEBLOCK610	N/A	600V	100A	75 HP

Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of two years, under the condition that the product has been installed and operated properly. All items proven defective within the two year period will be replaced by BRAH Electric. We are not responsible for any consequential losses or damages outside of defective product as well as any replacements or repairs performed by another party without a written authorization from BRAH Electric.

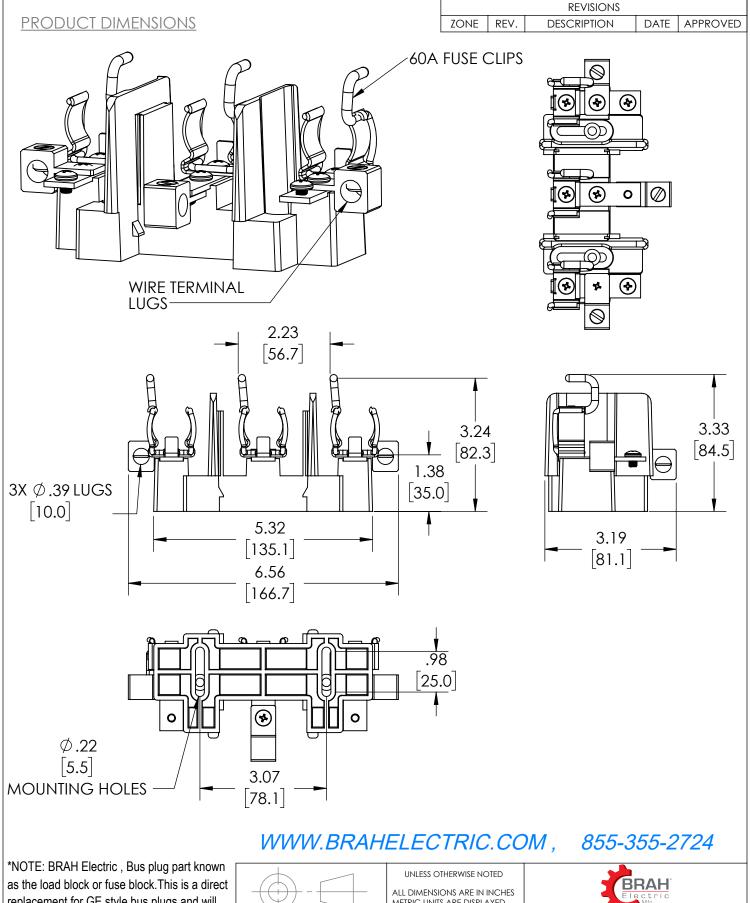

replacement for GE style bus plugs and will fit All Spectra series, Spectra low amp, Armor Clad and Flex-A plug Bus Plugs, substitute for OEM General Electric, engineered to operate on 240 volt systems, 3 phase, 240 volt, 60 amp maximum.



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.

ALL DIMENSIONS ARE IN INCHES METRIC UNITS ARE DISPLAYED BENEATH IN [MM.]

MATERIAL MOLDED PLASTIC BASE

DO NOT SCALE DRAWING



BUS PLUG LOAD SIDE FUSE BLOCK, 60Amp

SIZE	DWG.	FUSEBLOCK206		A REV.
SCAL	E:1:5	WEIGHT:	SHEET 1 OF 1	