

Insulation Displacement Connectors (IDC)






Insulation Displacement Connectors

85-900, UB-I IDC Connector

Insulation displacement gel filled tap splicing connector for 2 wire applications. For solid wire conductors of 22-26 AWG (0.7-0.4mm) having maximum insulated 0.D. of .060 in. (1.52mm).


85-925, UR-I IDC Connector

Insulation displacement gel filled butt splicing connector for 3 wire applications. For solid wire conductors of 19-26 AWG (0.9-0.4mm) having maximum insulated 0.D. of .066 in. (1.68mm).



85-950, UY-I IDC Connector

Insulation displacement gel filled butt splicing connector for 2 wire applications. For solid wire conductors of 22-26 AWG (0.7-0.4mm) having maximum insulated 0.D. of .060 in. (1.52mm).




Description	Qty.	Conductor OD	Max. Insulation OD	Cat. No.
UB-I, 2-Wire Tap Splice IDC	25	22-26 AWG (0.7-0.4mm)	0.060 in. (1.52mm)	85-900
UR-I, 3-Wire Butt Splice IDC	25	19-26 AWG (0.9-0.4mm)	0.066 in. (1.68mm)	85-925
UY-I, 2-Wire Butt Splice IDC	25	22-26 AWG (0.7-0.4mm)	0.060 in. (1.52mm)	85-950

Kinetic Super™ Wire Stripper/Crimper

The Kinetic Super Stripper/Crimper is smartly engineered to make your job easier. Packed with powerful features, it is ideal for use with all major brands of IDC connectors. Cat. No. 45-715



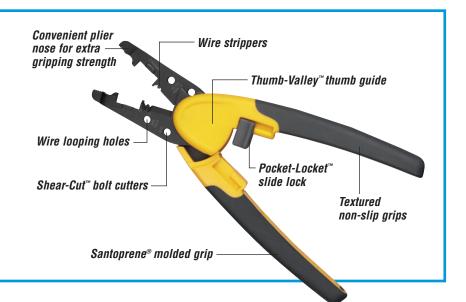

IDEAL INDUSTRIES, INC.

Becker Place, Sycamore, IL 60178 – 800-435-0705 in U.S.A. Ajax, Ontario, L1S 2E1, Canada – 800-527-9105 in Canada Warrington, Cheshire WA5 7TN, England – 44 1925 444.446 www.idealindustries.com