


SEPERATE LED DRIVER

25W | 100-240V

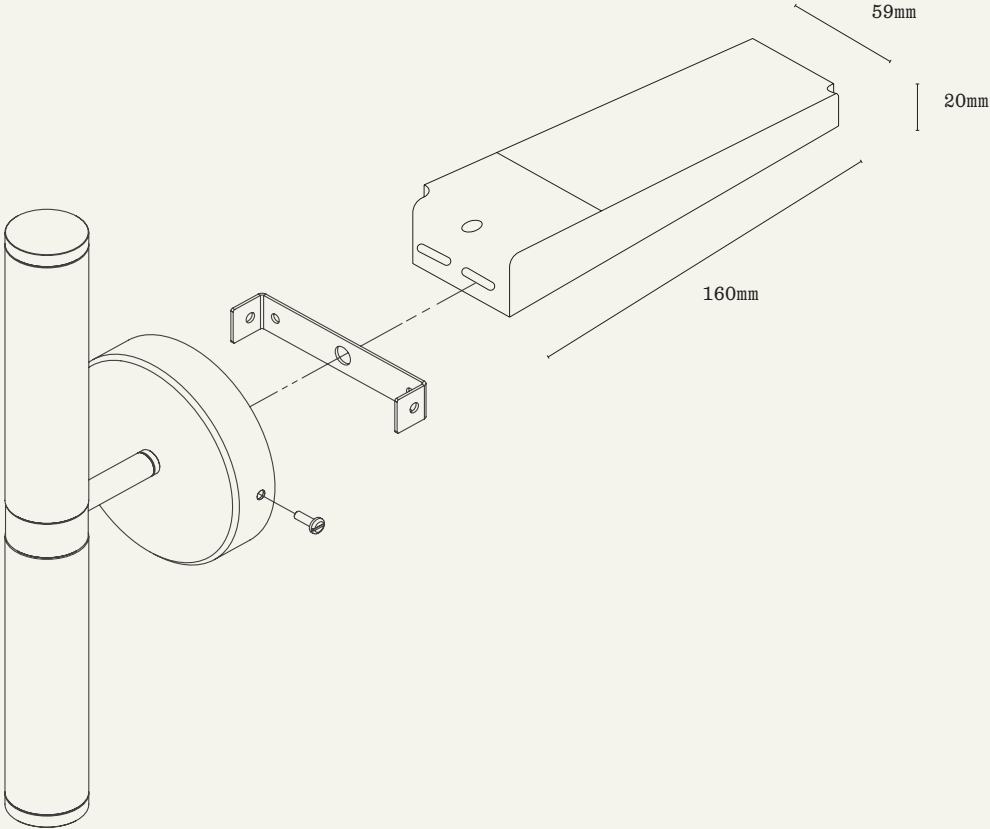

STANDARD DRIVER

All Snelling fittings requiring a separate LED driver are supplied as standard with our universal input dimmable driver. The driver is separate from the visible light fitting and must be housed in a suitable accessible location. It should not be assumed that it will fit within all standard junction boxes, wall boxes, or canopy spaces.

The most common placement is behind the light fitting, within the wall cavity, where space allows. This provides a clean, concealed installation. An opening must be provided in the wall large enough for the driver to pass through.

The driver does not need to be located immediately behind the fitting. It may be installed remotely in another accessible location, provided the cable run between driver and fitting remains within recommended limits for voltage drop.

Final driver location should be discussed with the electrician and/or builder before installation to ensure suitable access for servicing, appropriate ventilation, and compliance with local electrical regulations.


SPECIALISED DRIVER - AVAILABLE ON REQUEST

Limited specialist drivers, such as DALI, are available on request at additional cost.

Compatibility with your control system must be confirmed prior to ordering. As a decorative lighting studio, our technical scope is limited to the drivers we supply.

WIRING DETAILS

OTM-A30-24
Input: 100-240VAC, 50/60Hz
Output: 24VDC
Output Current: Max 1.25A, 30W
Output Voltage: 24V
Power Factor: >0.9
Ta: 40°C
Tc: 80°C
IP Rating: IP20
Dimmable Range: 0-100%

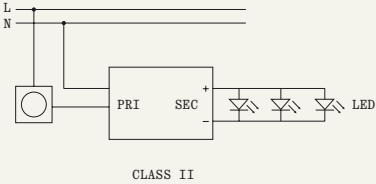

APPLIES TO

- Arch Wall Light
- Arch Wall Light 02
- Arch Pendant 01
- Arch Pendant 02
- Arch Pendant 03
- Turn Wall Light 01
- Turn Wall Light 02
- Turn Pendant 01
- Turn Pendant 02
- Lens Pendant Major
- Lens Pendant Minor
- Lens Wall Sconce Minor
- Lens Wall Sconce Major