


HEPWORTH WALL

Installation Guide

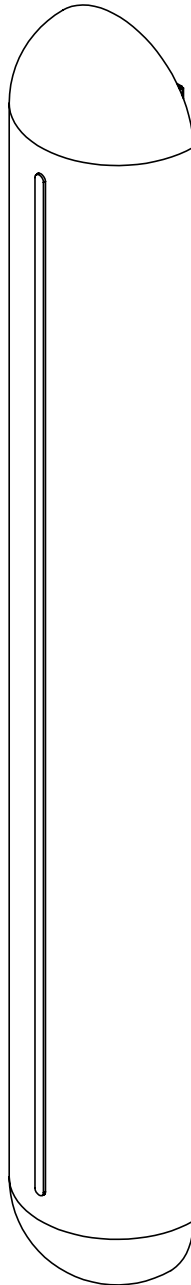

!

Please handle with care and wear gloves at all times during assembly and installation to avoid damaging components.

TECHNICAL

Bulb Holder
intergrated LED

Wattage
15W LED 2700k


Weight
4kg

PARTS & COMPONENTS

- A. Body, wall mounting bracket, 2 x M4 Counter sunk machine screws
B. Covering Plate (110V ONLY)
C. US Adapter plate (110V ONLY)


240V

A.




110V

B.



C.




- All nuts and bolts required for the installation will be included in the delivery.



BEFORE INSTALLATION


- Check that you have all components before starting the installation.
 - Installation must be carried out by a qualified electrician.
 - A minimum of two people is required to install a pendant light.
- Check that the ceiling or wall fixings are suitable and strong enough to support the weight of the light fixture.
 - You will need the below specific tools for a successful installation.

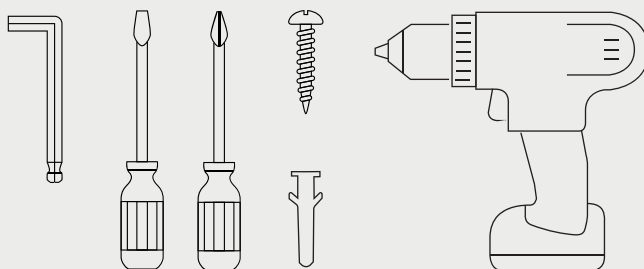

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

1. Remove the alabaster from the wall bracket by removing the screw located on the topside.

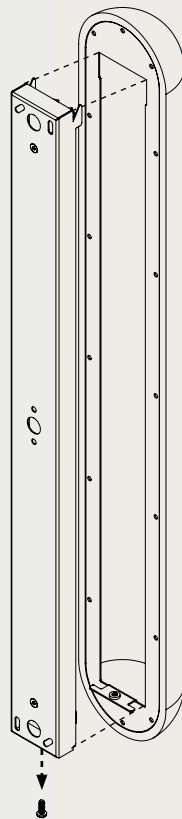


2.

240V

1. Securely fix the mounting plate to the wall using 4 x screws suitable for the surface you are mounting to (not supplied).

Ensure the mounting plate is located with the hooks on the top side.
Ensure that the mains cable is centred with the hole, either of hole can be used.

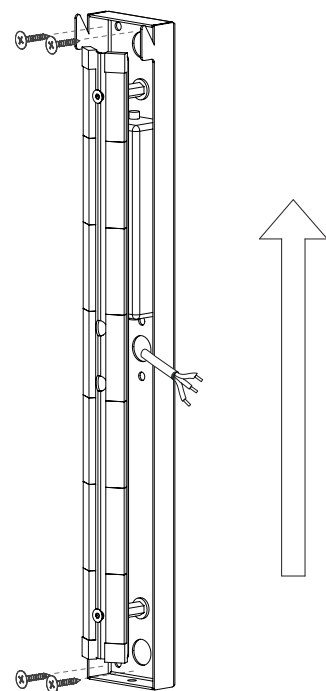


2.

110V

1. Securely fix the US adapter plate to junction box ensuring that the three central holes are vertically positioned.

2. Attach the mounting plate and covering plate to the Adapter plate using the 2 screws provided to securely attach the wall plate to the junction box.

Ensure the mounting plate is located with the hooks on the lower side.

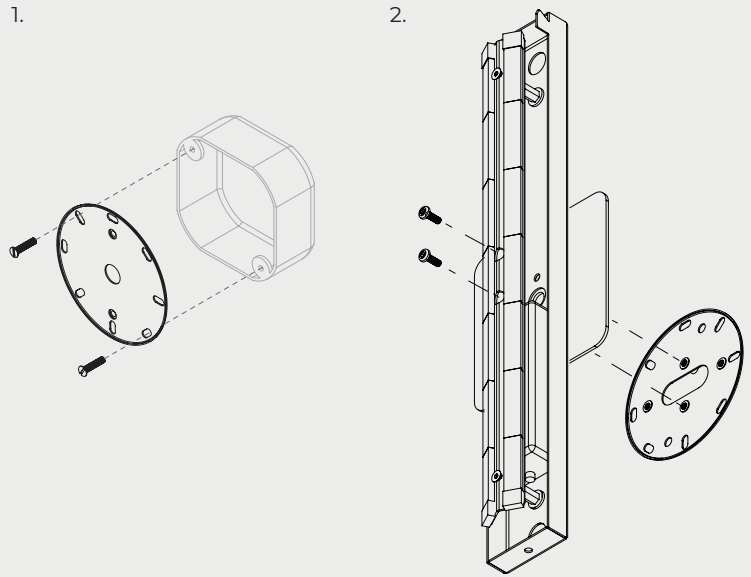

3.


Connect fitting to mains input, insuring all wires are colour matched as below:

Live = Black
Neurtal = White
Earth = Earth

Ensure you are using suitable IP44 connectors (not included). Installation must be performed by a qualified person.

Any terminal blocks recommended must conform to IEC 60998-2-1 or IEC 60998-2-2


Terminal block - Specification
Type - Screw / screw less - IP44
No of terminals - 3
Rated voltage - 240v
Rated connecting capacity - AWG 24-12

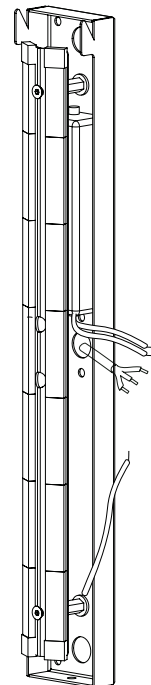

4.

Place the alabaster top first, so the hooks engage, over the mounted plate.

Secure with the screw located on the underside.

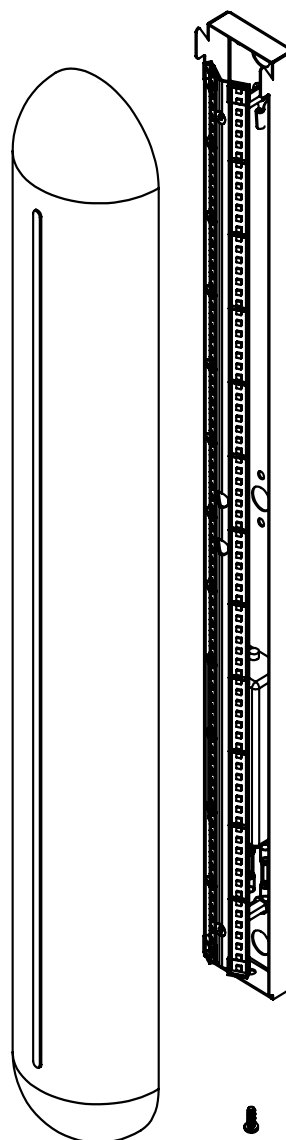

MAINTENANCE

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

Cleaning

Dust using a dry lint-free cloth weekly or as required

Repairs

Contact
CTO Lighting

Warranty

Please visit
[www.ctolighting.co.uk/](http://www.ctolighting.co.uk/pages/f-a-q)
[pages/f-a-q](http://www.ctolighting.co.uk/pages/f-a-q)
for CTO warranty policy

Certification

