

# Product Environmental Profile

## Socket outlet 2-way screwless USB 15 W





## General information

### Representative product

Socket outlet 2-way screwless USB 15 W - WDE002195

### Description of the product

The main function of the socket outlet is to allow users to connect and disconnect the plug of an electrical load or the source of a signal from a network.

### Functional unit

Connect/Disconnect during 10 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts.  
And make available during 10 years, but consider two USB connections. Environmental impact of PEP = Reference product environmental impact x 2. The function unit is accordance with the following technical data:


- Input voltage: 250V
- Input current: 16A
- IP20 IK04



## Constituent materials

### Reference product mass

251.3 g including the product, its packaging and additional elements and accessories

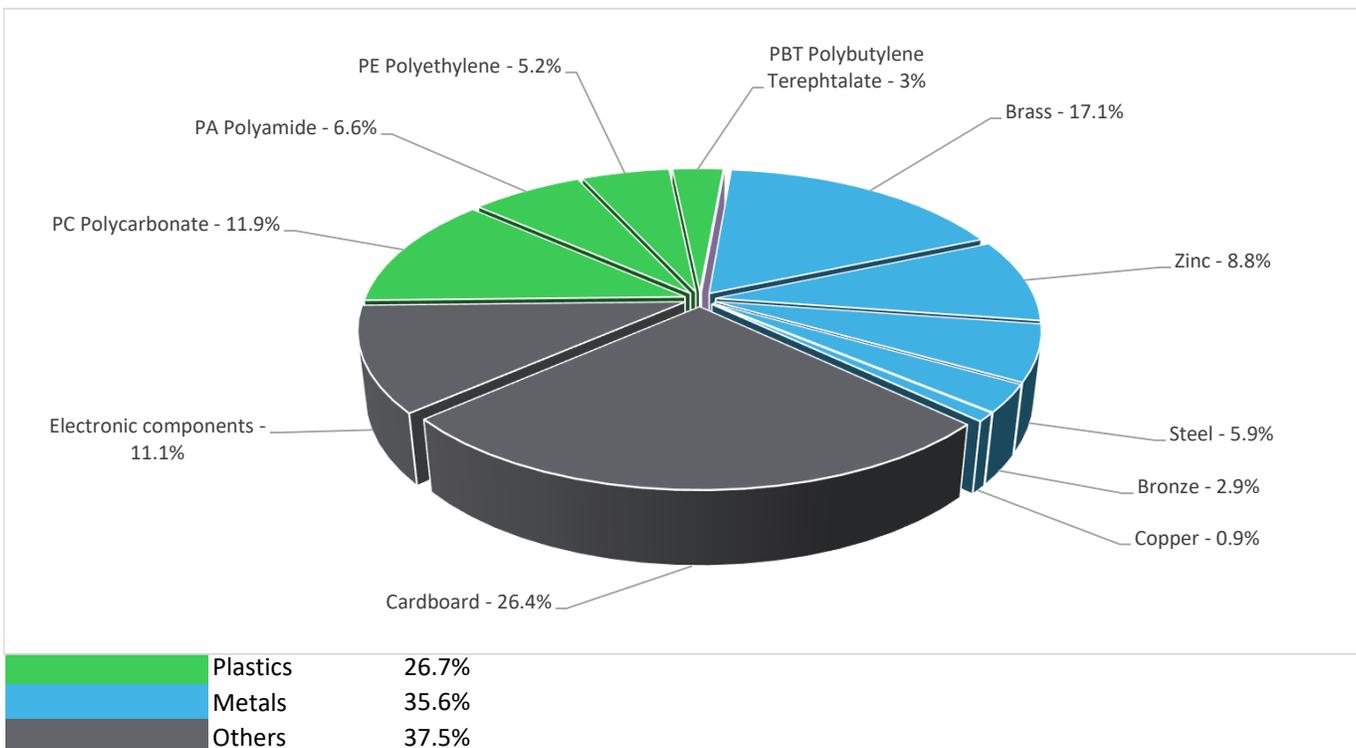

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium, flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), or phthalates (Bis(2-ethylhexyl) phthalate - DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

[http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium\\_page](http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium_page)

## Additional environmental information


The Socket outlet 2-way screwless USB 15 W presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 77.5 g, consisting of cardboard(83.1%), PE film(16.9%)
<b>Installation</b>	Ref WDE002195 does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains electronic card (28.3402g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website</p> <p><a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a></p> <p>Recyclability potential: <b>44%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>

## Environmental impacts

<b>Reference life time</b>	Confirmed by designer, the product lifetime is 10 years. years			
<b>Product category</b>	Combination of functions			
<b>Installation elements</b>	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
<b>Use scenario</b>	<p>Power socket Load rate: 50 % of In Use rate: 50% of the RLT</p> <p>USB socket Load rate: 100 % of the rated current according to the USB standards Load rate: 30% de the RLT</p>			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The main function of the socket outlet is to allow users to connect and disconnect the plug of an electrical load or the source of a signal from a network.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Socket outlet 2-way screwless USB 15 W - WDE002195					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.34E-03	1.30E-03	0*	0*	4.18E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2.02E+00	1.22E-02	2.96E-04	0*	2.01E+00	0*
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1.24E-01	2.98E-03	6.82E-05	1.70E-05	1.21E-01	4.79E-05
Contribution to global warming	kg CO <sub>2</sub> eq	4.89E+02	6.87E+00	6.48E-02	0*	4.82E+02	1.27E-01
Contribution to ozone layer depletion	kg CFC11 eq	3.21E-05	6.98E-07	0*	0*	3.14E-05	4.81E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.12E-01	1.26E-03	2.11E-05	0*	1.10E-01	1.18E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	1.75E+03	0*	0*	0*	1.75E+03	0*
Total Primary Energy	MJ	9.70E+03	8.46E+01	0*	0*	9.62E+03	0*

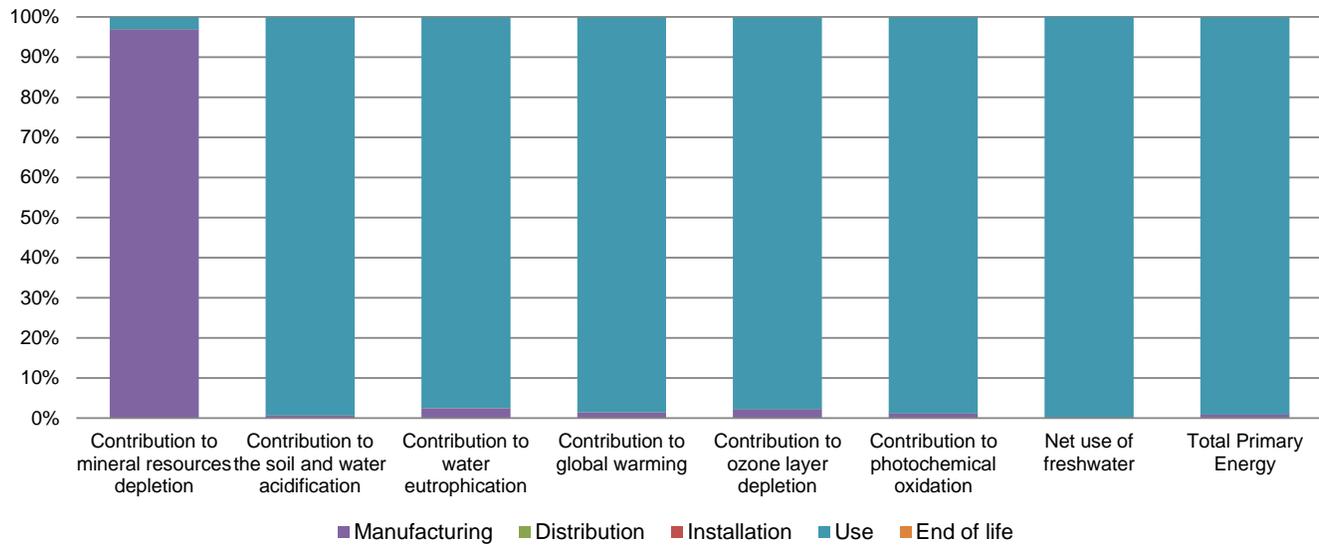

Optional indicators		Socket outlet 2-way screwless USB 15 W - WDE002195						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	5.53E+03	6.33E+01	9.11E-01	0*	5.47E+03	0*	
Contribution to air pollution	m <sup>3</sup>	2.20E+04	1.29E+03	2.76E+00	0*	2.07E+04	4.16E+00	
Contribution to water pollution	m <sup>3</sup>	2.09E+04	9.72E+02	1.07E+01	0*	1.99E+04	6.79E+00	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	1.05E-02	1.05E-02	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	1.23E+03	2.84E+00	0*	0*	1.22E+03	0*	
Total use of non-renewable primary energy resources	MJ	8.48E+03	8.18E+01	9.16E-01	0*	8.39E+03	0*	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.22E+03	2.69E-01	0*	0*	1.22E+03	0*	
Use of renewable primary energy resources used as raw material	MJ	2.57E+00	2.57E+00	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	8.47E+03	7.66E+01	9.16E-01	0*	8.39E+03	0*	
Use of non renewable primary energy resources used as raw material	MJ	5.12E+00	5.12E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	1.26E+01	1.17E+01	0*	0*	2.51E-01	5.83E-01	
Non hazardous waste disposed	kg	1.80E+03	5.17E+00	0*	0*	1.80E+03	0*	
Radioactive waste disposed	kg	1.20E+00	1.11E-03	0*	0*	1.20E+00	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	3.26E-01	4.17E-02	0*	1.36E-01	0*	1.48E-01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	2.96E-02	0*	0*	0*	0*	2.96E-02	
Exported Energy	MJ	4.09E-04	3.85E-05	0*	3.71E-04	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number</i>	ENVPEP1910003_V1	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	02/2020	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP1910003\_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

02/2020