

## Media converter Chassis 19" 14 slot - 2xpower supply 230V ES1914-220V



### Anvendelse

En samlet strømforsyning for alle mediekonverterere. Plug-and-Play designet gør chassiset, nemt at arbejde med. Kan indeholde op til 14 stk. Understøtter 100Mbps, 1000Mbps og 10Gps samtidigt.

Varenr.: 227609

### Specifikation

Opsætning: 19"

Materiale: Pulverlakeret stål

Farve: Sort

Højde: 2 HE



Dimension: B485 x D238 x H90mm


Strømforsyning: 230V AC / 48V DC

Drift: Hot-swappable / Plug-and-play

## 14 Port Chasis

The 14-slot bench top Media converter rack is a centralized power-supply conversion center in the equipment room. It uses centralized power supply for main and backup power supplies and can be automatically switched. It has 14 modules and has a variety of modules. Work and hot swap, configuration flexibility, greatly facilitates user management.

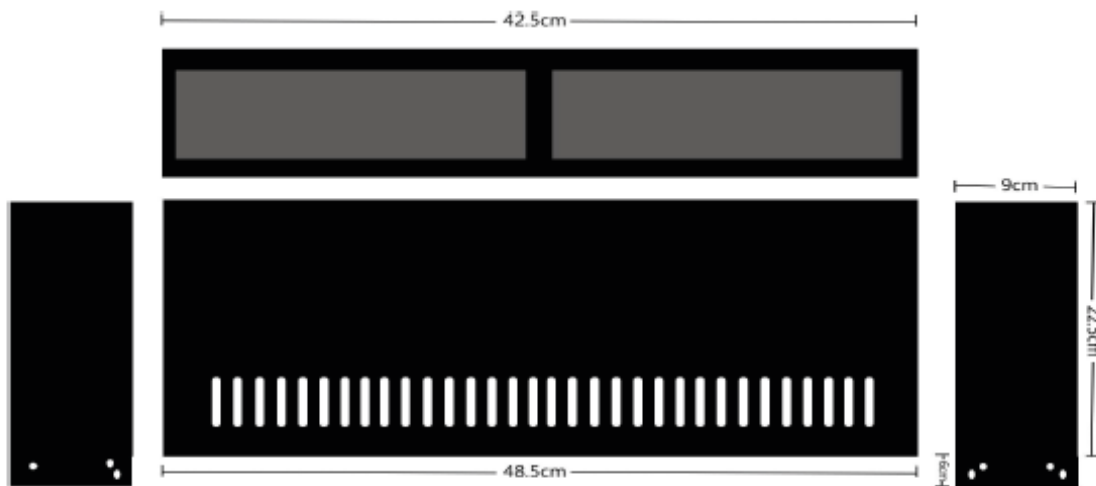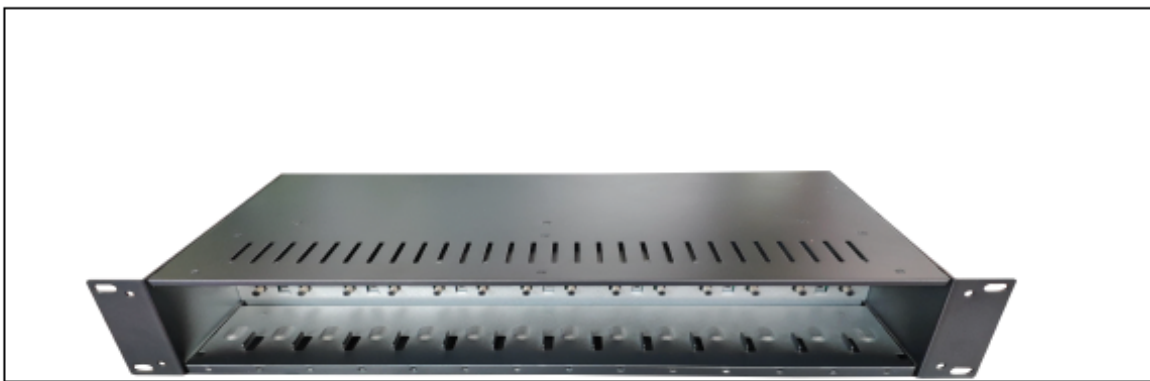

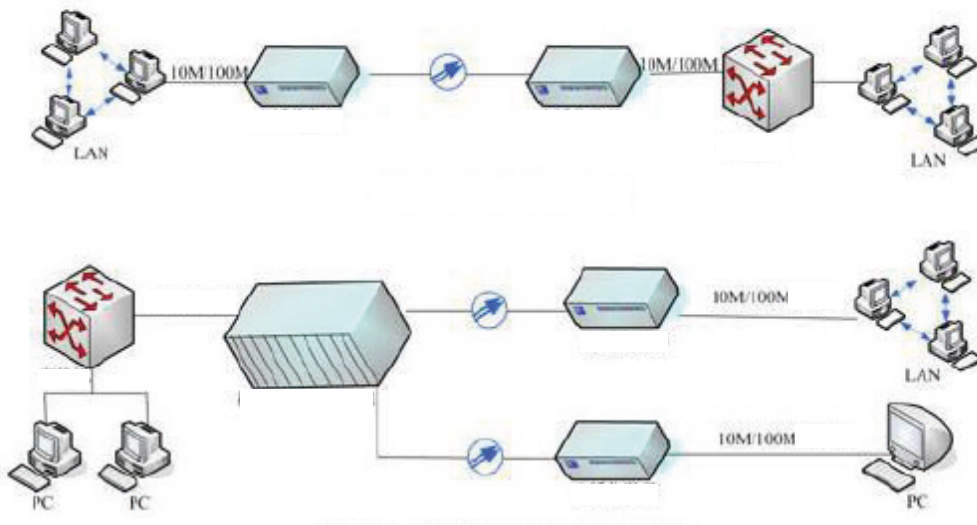

Parameter	<ul style="list-style-type: none"> <li>➤ Installable type: external desktop transceiver</li> <li>➤ 100M single multimode transceiver</li> <li>➤ 10/100M single multimode transceiver</li> <li>➤ 10/100/1000M adaptive single multimode transceiver</li> <li>➤ Transmission distance: 550m ~ 100km</li> </ul>
Performance specification:	<ul style="list-style-type: none"> <li>➤ Forwarding method: store and forward</li> <li>➤ Transmission mode: full-duplex/half-duplex adaptive</li> <li>➤ MAC address table: optional</li> <li>➤ Frame Memory: Optional</li> <li>➤ Backplane bandwidth: optional</li> </ul>
Power Supply:	<ul style="list-style-type: none"> <li>➤ Power type: Built-in dual power supply</li> <li>➤ Power input voltage: input working voltage: 100~240V AC</li> <li>➤ machine power connector: DC socket</li> <li>➤ Output working voltage: 5V</li> <li>➤ Maximum output power: 65W</li> </ul>
Working Temperature:	<ul style="list-style-type: none"> <li>➤ Storage temperature: -40 to 70 ° C</li> <li>➤ Working temperature 0~ 50° C</li> <li>➤ Working humidity 5 ~ 9</li> </ul>