



**Color:** White

**UPC Code:** 07847798469

**Country Of Origin:** Mexico

**NEMA:**  
5-15R



## 5825-W

### Brand Features

Leviton has combined the two most popular configurations, a NEMA 5-15 and CEE 7/16 1-15 plug. This two-pin plug is probably the single most widely used international plug, popularly known as the Europlug. The plug is unearthed and has two round, 4 mm pins, which usually converge slightly. It can be inserted into any socket that accepts 4 mm round contacts spaced 19 mm apart. It is described in CEE 7/16 and is also defined in Italian standard CEI 23-5 and Russian standard GOST 7396. The Europlug is used in Class II applications throughout continental Europe (Germany, Austria, Switzerland, Italy, Greece, the Netherlands, Belgium, France, Spain, Portugal, Denmark, Norway, Sweden, Finland, Poland, The Czech Republic, Slovakia, Hungary, Romania, Bulgaria, Lithuania). It is also used in Turkey, the Middle East, and most of Africa and South America (Brazil), as well as the former Soviet republics, and many developing nations. The plug is intended for use with devices that require 2.5 A or less. Because it can be inserted in either direction into the socket, live and neutral are connected at random.

### Item Description

Decora Plus Duplex Receptacle Outlet, Straight Blade and Europlug, Commercial Specification Grade, Smooth Face, 15 Amp, 125/250 Volt, Back or Side Wire, NEMA 5-15R\_CEE 7/16 , 2-Pole, 3-Wire - White

### Technical Information

#### AC Horsepower Ratings

**At Rated Voltage:** 1/2 HP

#### Electrical Specifications

**Amperage:** 15 A

**Current Limiting:** Full Rated Current

**Dielectric Voltage:** Withstands 1500 V per UL498

**NEMA:** 5-15R

**Pole:** 2

**Temperature Rise:** Max 30C after 100 cycles OL at 150 percent rated current

**Voltage:** 125/250 VAC

**Wire:** 3

#### Environmental Specifications

**Flammability:** Rated V-2 per UL 94

**Operating Temperature:** -40°C to 60°C

#### Material Specifications

**Body Material:** Thermoplastic Nylon

**Clamp Nuts:** Zinc Plated Steel

**Color:** White

**Face Material:** Thermoplastic Nylon

**Grounding Screw:** Brass 8-32

**Line Contacts:** Brass Triple-Wipe .031 Thick

**Strap Material:** Zinc Plated Steel

**Terminal Screws:** Brass 10-32

#### Mechanical Specifications

**Product ID:** Ratings are permanently marked on device

**Terminal Accom.:** 14-10 AWG


**Terminal ID:** Brass-Hot, Green-Ground, Silver-Neutral

**Termination:** Back or Side Wire

#### Product Features

**Color:** White

**NEMA:** 5-15R

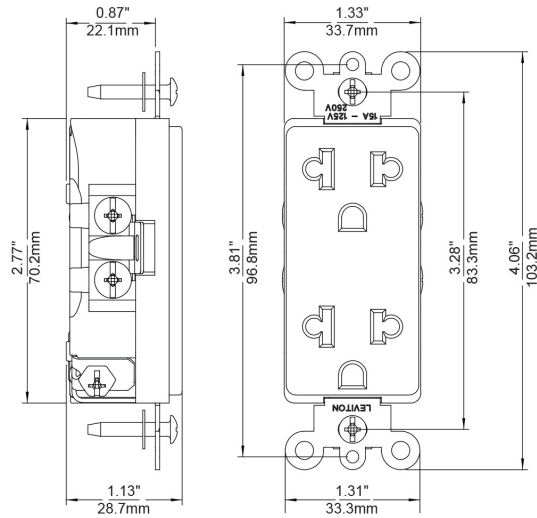

## SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

