

67W74

Brand Features

Leviton's Wetguard line of industrial watertight wiring devices are the most versatile, well-engineered watertight devices on the market. They meet IP67 and NEMA ratings for water ingress protection, and offer many significant advantages over competitive brands.

Item Description

20 Amp, 125/250 Volt, NEMA L14-20R, 3P, 4W, Flip Lid with Receptacle, Single Locking Flush Mounting Receptacle, Corrosion Resistant, Grounding, Wetguard Flip Lid, Back & Side Wired, Nickel-Plated Brass Strap, - YELLOW



Color:  Yellow

UPC Code: 07847706202

Country Of Origin: Mexico

NEMA:
L14-20R



Technical Information

AC Horsepower Ratings

At Rated Voltage: 2 HP L-L / 1 HP L-N

Electrical Specifications

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Environmental Specifications

Environment: Wet

Flammability: Rated V-0 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Base Material: Nylon

Face Material: Nylon

Grounding Screw: Nickel-Plated Brass 8-32

Line Contacts: Nickel-Plated Brass .040 Thick

Terminal Screws: Nickel-Plated Brass 10-32

Yoke: Nickel-Plated Brass .050 Thick

Mechanical Specifications

Product ID: Ratings and NEMA I.D. permanently marked on device

Terminal Accom.: 14-8 AWG

Terminal ID: Brass-Hot, Green-Ground, White-Neutral

Product Features

Amperage: 20 A

Base Material: Nylon

Brand: Wetguard

Color: Yellow

Face Material: Nylon

Grounding: Grounding

NEMA: L14-20R

Pole: 3

Standards and Certifications: UL/CSA

Strap Material: Nickel-Plated Brass

Termination: Back

Voltage: 125/250 VAC

Warranty: Lifetime Warranty

Wire: 4

Device Type: Locking Outlet

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File LR-406


NEMA: WD-6

NOM: 057


UL498: File E13399

UL Fed Spec WC-596: File E13399

Dimensional Diagram

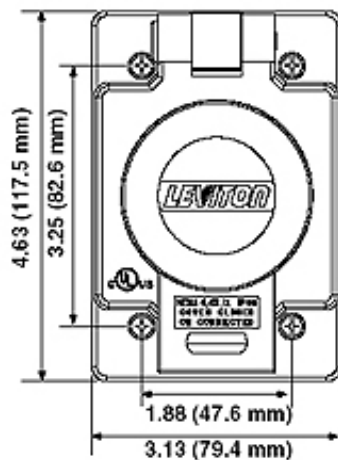

Wiring Diagram

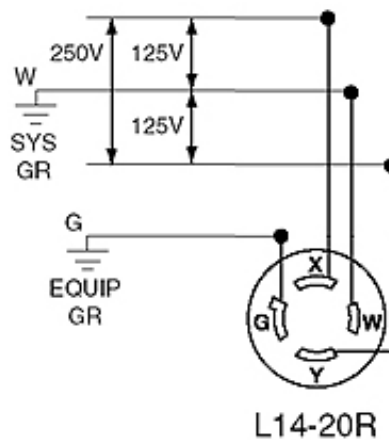

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

