


Current Transducer HOP 200 to 600-SB

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

$$I_{PN} = 200 \dots 600 \text{ A}$$



Electrical data

	Type	Primary nominal	Primary current,	
		current rms	measuring range	
		I_{PN} (A)	I_{PM} (A)	
	HOP 200-SB	200	± 300	
	HOP 300-SB	300	± 450	
	HOP 400-SB	400	± 600	
	HOP 500-SB	500	± 750	
	HOP 600-SB	600	± 900	
V_{OUT}	Output voltage (Analog)		± 4	V
R_L	Load resistance		> 10	kΩ
V_C	Supply voltage (± 5 %)		± 12 .. 15	V
I_C	Current consumption (max)		20	mA

Accuracy - Dynamic performance data

X	Accuracy ¹⁾ @ I_{PN} , $T_A = 25^\circ\text{C}$, @ ± 12 .. 15 V (± 5 %)	≤ ± 2	%
ϵ_L	Linearity error ¹⁾	≤ ± 1	%
V_{OE}	Electrical offset voltage @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ ± 50	Max ± 140 mV
V_{OM}	Magnetic offset voltage @ $I_P = 0$ and specified R_M , after an overload of $3 \times I_{PN}$	± 20	± 30 mV
V_{OT}	Temperature variation of V_O - 10°C .. + 70°C	± 140	± 550 mV
$TC\epsilon_G$	Thermal drift of the gain, $T_A = - 10 \dots + 70^\circ\text{C}$	± 160	± 600 mV
t_r	Response time to 90 % of I_{PN} step	< 10	µs
di/dt	di/dt accurately followed	50	A/µs
BW	Frequency bandwidth (- 1 dB)	DC .. 8	kHz

General data

T_A	Ambient operating temperature	- 10 .. + 70	°C
T_S	Ambient storage temperature	- 25 .. + 85	°C
m	Mass	110	g
	Standard	EN 50178	

Features

- Open loop Hall effect transducer
- Busbar mounting or panel mounting
- Isolated plastic case recognized according to UL 94-V0.

Advantages

- Low power consumption
- Split core easy for mounting
- High isolation between the primary and the secondary circuit
- Through-hole, no insertion losses.

Applications

- Power supplies for TELECOM (monitoring & measuring)
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Electrical chemistry
- Chooper
- Battery supplied applications.

Application domain

- Industrial.

Note: ¹⁾ Excludes the electrical offset.

Current Transducer HOP 200 to 600-SB

Isolation characteristics

V_d	Rms voltage for AC isolation test, 50 Hz, 1 min	3	kV
\hat{V}_w	Impulse withstand voltage 1.2/50 μ s	> 6	kV
V_e	Partial discharge extinction voltage rms	> 1.5	kV
		Min	
dCp	Creepage distance ¹⁾	25.6	mm
dCI	Clearance distance ²⁾	15.7	mm
CTI	Comparative Tracking Index (group IIIa)	250	

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
dCp, dCI, \hat{V}_w	Rated isolation voltage	Nominal voltage
Single isolation	1000 V	1000 V
Reinforced isolation	500 V	500 V

Notes: ¹⁾On housing from pin to primary hole

²⁾On housing from pin to primary hole.

Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions HOP 200 to 600-SB (in mm. 1 mm = 0.0394 inch)

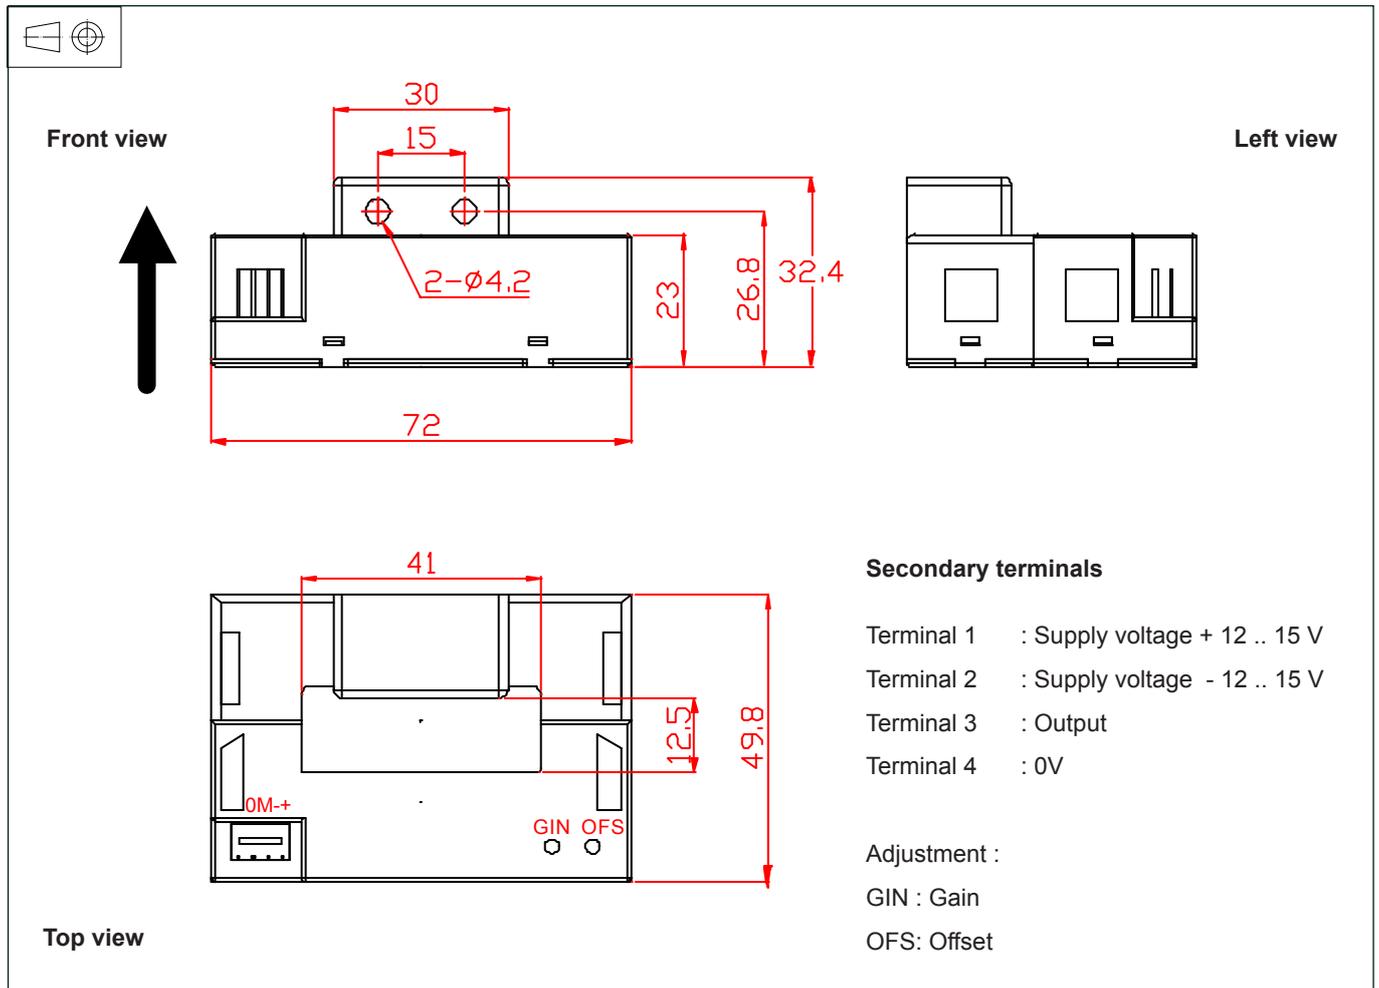

Mechanical characteristics

- General tolerance ± 1 mm
- Primary through hole 41 x 12.5 mm
- Busbar fastening or panel mounting 2 holes $\varnothing 4$ mm
- Connection of secondary MOLEX 5045-04/AG
"Malting connector provided with the transducer"

Remarks

- V_{OUT} is positive when I_p flows in the direction of the arrow.
- The return busbar and primary conductor elbow must be located at least at 2.5 x window length more far away from the transducer case.
- Temperature of the primary busbar cannot exceed 90°C.
- Dynamic performances are best with a primary busbar completely filling the primary aperture.
- This is a standard model. For different versions (supply voltages, different output, unidirectional measurements ...), please contact us.