## Piezo Switch for Explosive Environments



PSE M19 EX







## **Description**

- Piezo switch certified according to ATEX and IECEx
- Assembly by mounting with nut
- Pins, Crimp Terminal male, AMP

### **Approvals**

- EMC: EMC directive 2004/108/EWG
- ATEX Approval Test Report: SEV 13 ATEX 0170 IECEx SEV 13.0011
- ATEX Approval Marking: Ex II 2 GD
  - Ex ib IIC T6...T5 Gb
  - Ex ib IIIC T85°C...T100°C Db
- MIL-STD Certificate Number: 202F Method 107G, 202F Method 204D, 202F Method 213B, 416D Method RS103, 810E Method 501.3, 810E Method 502.3, 810E Method 507.3
- VDE Certificate Number: DIN EN 61000-4-2, DIN EN 61000-4-4

#### **Characteristics**

- Housing material types: aluminum, brass chrome-plated or stainless
- High reliability, long lifetime with more than 20 mill. actuations Easy to clean due to a tightly closed surface (IP 69K)
- for use in harsh environments, in potentially explosive applications and environments where volatile fumes, gases and dust are present

#### References

Alternative: Standard version PSE EX 16 Alternative: Other diameter PSE EX 16

Alternative: Other diameter

#### Weblinks

html-datasheet, General Product Information, CE declaration of conformity, RoHS, CHINA-RoHS, CAD-Drawings, Product News, Detailed request for product, Microsite

# **Technical Data**


Electrical Data	
Switching Function	N.O.
Switching Voltage	Ui max. 24 / 24 VAC/DC
Switching Current	li max. 40 mA
Rated Breaking Capacity (Tem-	Pi max. 0.96 W
perature Class T5/T100°C)	
Rated Breaking Capacity (Tem-	Pi max. 0.7 W
perature Class T6/T85°C)	
Lifetime	20 million at Rated Switching Capacity
Switch Resistance OFF	$> 10 \text{ k}\Omega$
Switch Resistance ON	$< 20  \text{m}\Omega$
Capacity	5 pF
N.O. Closing Impulse Duration	20- 1000 ms
Contact Configuration	free polarity

Mechanical Data	
Actuating Force	≤ 3 N at ambient temperature
Actuating Travel	0.002 mm
Shock Protection	IK 02
Tightening Torque	2.5 Nm
Climatical Data	
Operating Temperature	-20 to +60°C
Storage Temperature	-20 to +60°C
IP-Protection	IP 67 acc. to IEC 60529, IP 69K acc. to DIN 40050-9
Environmental Assessment	55°C / 93% r.h. acc. to DIN EN 60068- 2-30
Salt Spray Test (acc. to DIN 50021-SS)	24 h / 48 h / 96 h Residence Time
Material	
Housing (depending on type)	Stainless Steel, Aluminium anodized, Polyamide, Chromed Brass

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in General Product Information

## **Dimension**

PSE M19 with Pins

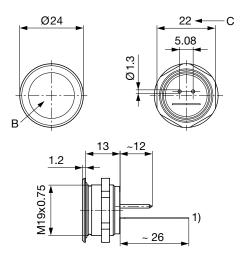

Legend:

1) = Type label

B = Actuating area

C = Width across flats

 $I = Crimp terminal male 3.6 \times 0.8$ 


- Wire (Standard: 0.14 mm² / 200 mm wire-length)
- Pins (with connection terminal 0701.9225)
- AMP

Lettering:

- Either with/without lettering
- Position of the connections with respect to the position of the lettering is not defined

## **Dimension**

PSE M19




Drilling diagram

## Lettering

The last three digits in the order number define the lettering:

001-076 Standard Lettering

101- Customized Lettering

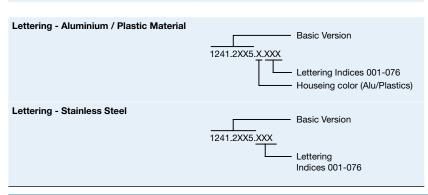

### **Lettering Colour of Laser Lettering**

Material	Lettering Colour		
Stainless Steel	black	Filled letters	
Aluminum natural anodized	light grey	Filled letters	(only after customer approval)
Aluminum coloured anodized	light grey	Filled letters	

## **Order Index Lettering**

Laser Marking					
001 = <b>A</b>	021 = <b>U</b>	041 = <b>÷</b>	061 = <b>EIN</b>		
002 = <b>B</b>	022 = <b>V</b>	042 = *	062 = <b>AUS</b>		
003 = <b>C</b>	023 = <b>W</b>	043 = <b>=</b>	063 = <b>AUF</b>		
$004 = \mathbf{D}$	024 = <b>X</b>	044 = #	064 = <b>AB</b>		
005 = <b>E</b>	025 = <b>Y</b>	045 = ↔	065 = <b>ON</b>		
006 = <b>F</b>	026 = <b>Z</b>	046 = \$	066 = <b>OFF</b>		
007 = G	027 = <b>0</b>	047 = →	067 = <b>UP</b>		
008 = <b>H</b>	028 = <b>1</b>	048 = ←	068 = <b>DOWN</b>		
009 = <b>I</b>	029 = <b>2</b>	049 = ↓	069 = <b>HIGH</b>		
010 = <b>J</b>	030 = <b>3</b>	050 = ↑	070 = <b>LOW</b>		
011 = <b>K</b>	031 = <b>4</b>	051 = %	071 = <b>ON/OFF</b>		
012 = <b>L</b>	032 = <b>5</b>	052 = √	072 = <b>START</b>		
013 = <b>M</b>	033 = <b>6</b>	053 = <b>CTRL</b>	073 = <b>RESET</b>		
014 = <b>N</b>	034 = <b>7</b>	054 = <b>RETURN</b>	074 = 🕛		
015 = <b>O</b>	035 = <b>8</b>	055 = <b>SHIFT</b>	075 = 🌣		
016 = <b>P</b>	036 = <b>9</b>	056 = LOCK	076 = △		
017 = <b>Q</b>	037 = +	057 = <b>STOP</b>	077 = ①		
018 = <b>R</b>	038 = -	058 = <b>ENTER</b>			
019 = <b>S</b>	039 = .	059 = <b>BACK</b>			
020 = <b>T</b>	040 = x	060 = <b>LINE</b>			

## **All Variants**

Mounting Diameter [mm]	Terminal	Housing Material	Colour of Housing	Config. Code	Order Number
19	Pins	Aluminum	red	PSE M 19 EX EX	1241.2475.3
19	Pins	Aluminum	green	PSE M 19 EX EX	1241.2475.5
19	Pins	Aluminum	Alu natural	PSE M 19 EX EX	1241.2475.8

- The explosion protected piezo switch element (PSE EX) has the function of a NO (normally open) switch.
- Permissible voltage and current of the PSE EX are limited, so that the PSE EX is intrinsically safe in accordance with EN60079-11 (see Technical Data).
- The use of the PSE EX is permitted in areas where the formation of explosive athmospheres caused by gases, fumes, mist or dust mixing with air occurs occasionally. The explosion protected PSE is classified according to EN 600079-0 in the device group II, category 2. Attention:
- The permissible operating temperature is 20°C to 60°C.
- The approval will cease when the type label is removed.
- The switch has to be installed and used according to IEC/EN 60079-14 and IEC/EN 60079-25.

The listed item numbers represent a selection of the range of piezo switches.

Other mounting diameters, materials, colors, connections and symbols are available on request.

Special materials for use in salt and chlorinated environment on request.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

10 in cardboard box packed in air cushion bag with instruction manual Packaging unit



- Actuating elements in ESD safe packaging
- Screw nuts and sealing rings in a bag (enclosed in the box)

## **Accessories**

## Description



Connecting Terminal PSE Connecting Terminal