TECHSEM

MTC200 MTA200 MTK200 MTX200 MT200
Thyristor Modules

Features:

- Isolated mounting base 2500V~
- Pressure contact technology with Increased power cycling capability
- Space and weight savings

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

$I_{T(AV)}$	200A
V_{DRM}/V_{RRM}	600~1800V
I_{TSM}	$7.2A\times10^3$
I^2t	$259A^2S*10^3$

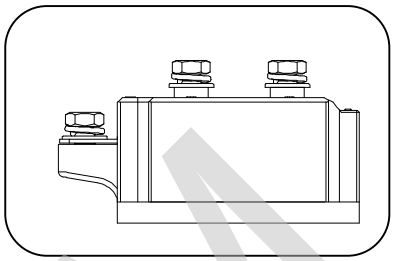

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_j(°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side cooled, T_c=85°C	125			200	A
$I_{T(RMS)}$	RMS on-state current		125			314	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V_{DRM}&V_{RRM} tp=10ms V_{DSM}&V_{RSM}= V_{DRM}&V_{RRM}+200V respectively	125	600		1800	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			30	mA
I_{TSM}	Surge on-state current	10ms half sine wave V_R=60%V_{RRM}	125			7.20	KA
I^2t	I^2T for fusing coordination					259	A^2s*10^3
V_{TO}	Threshold voltage		125			0.80	V
r_T	On-state slop resistance					1.27	mΩ
V_{TM}	Peak on-state voltage	I_{TM}=600A	25			1.65	V
dv/dt	Critical rate of rise of off-state voltage	V_{DM}=67%V_{DRM}	125			800	V/μs
di/dt	Critical rate of rise of on-state current	I_{TM} =400A,Gate source 1.5A t_r≤0.5μs Repetitive	125			100	A/μs
I_{GT}	Gate trigger current	V_A=12V, I_A=1A	25	30		180	mA
V_{GT}	Gate trigger voltage			1.0		2.5	V
I_H	Holding current			20		150	mA
V_{GD}	Non-trigger gate voltage	V_{DM}=67%V_{DRM}	125	0.2			V
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled				0.140	°C /W
Rth(c-h)	Thermal resistance case to heat sink	Single side cooled				0.04	°C /W
V_{iso}	Isolation voltage	50Hz,R.M.S,t=1min,I_{iso}:1mA(MAX)		2500			V
F_m	Thermal connection torque (M5)				4.0		N·m
	Mounting torque (M6)				6.0		N·m
T_{stg}	Stored temperature			-40		125	°C
W_t	Weight				860		g
Outline	413F3						

Peak On-state Voltage Vs.Peak On-state Current

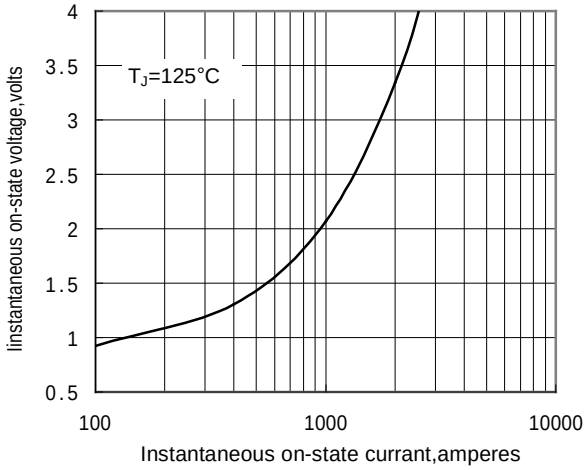

Fig.1

Max. junction To case Thermai Impedance Vs.Time

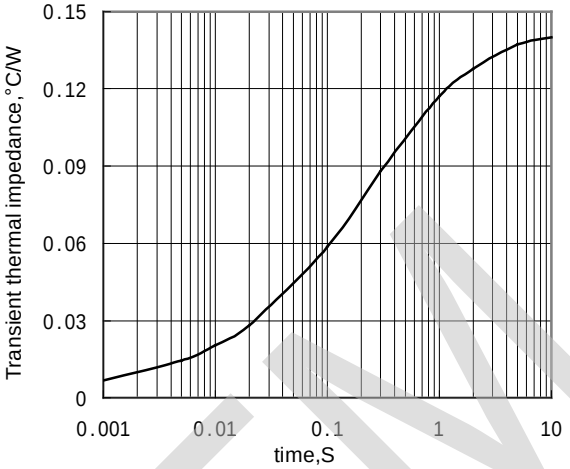

Fig.2

Max. Power Dissipation Vs.Mean On-state Current

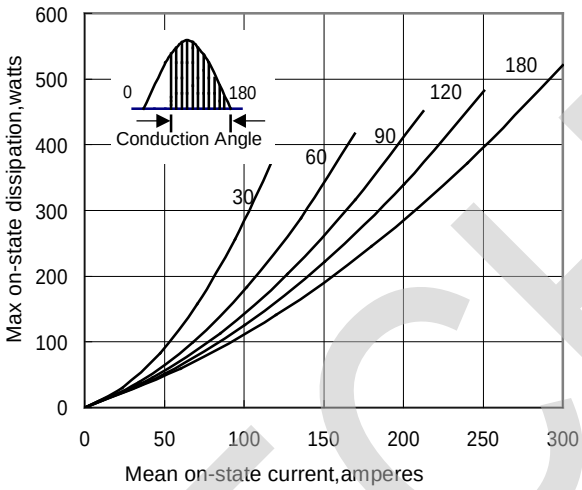

Fig.3

Max. case Temperature Vs.Mean On-state Current

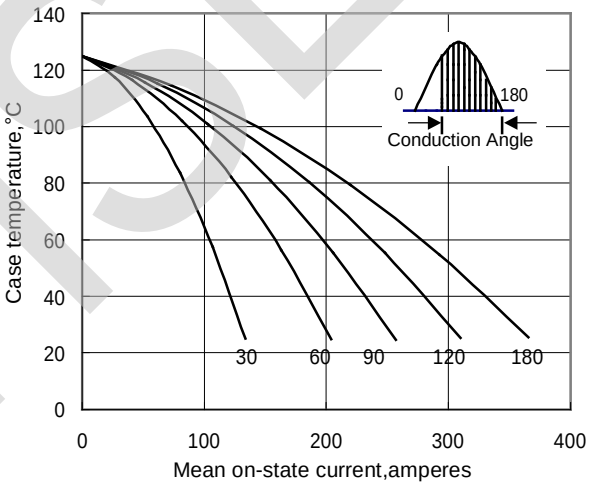

Fig.4

Max. Power Dissipation Vs.Mean On-state Current

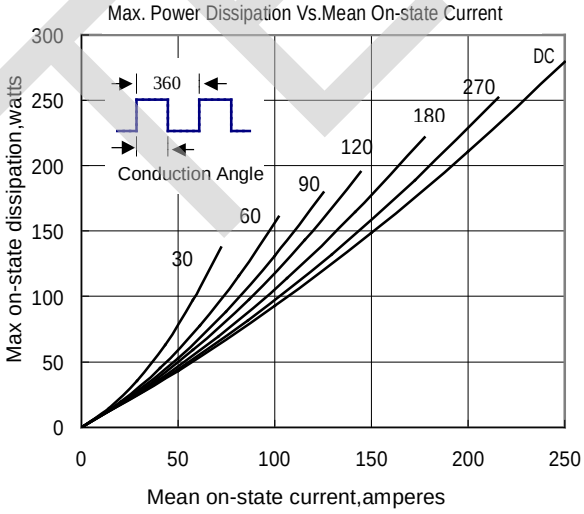

Fig.5

Max. case Temperature Vs.Mean On-state Current

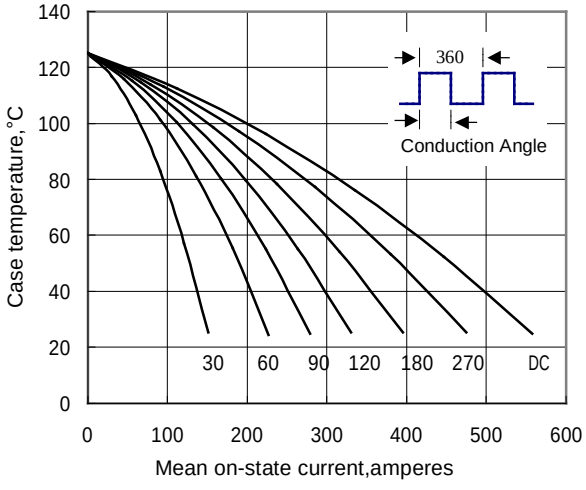

Fig.6

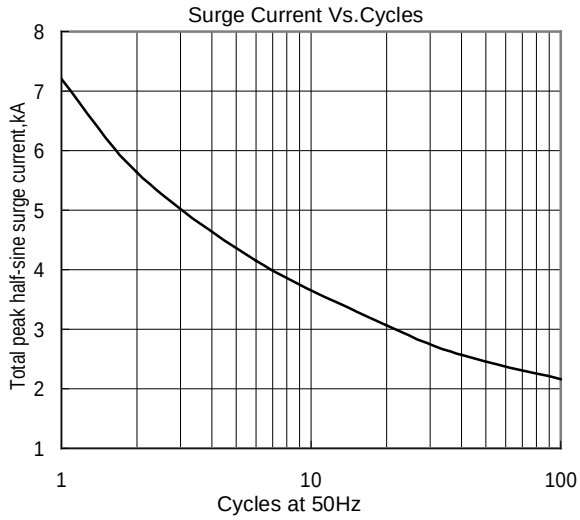

Fig.7

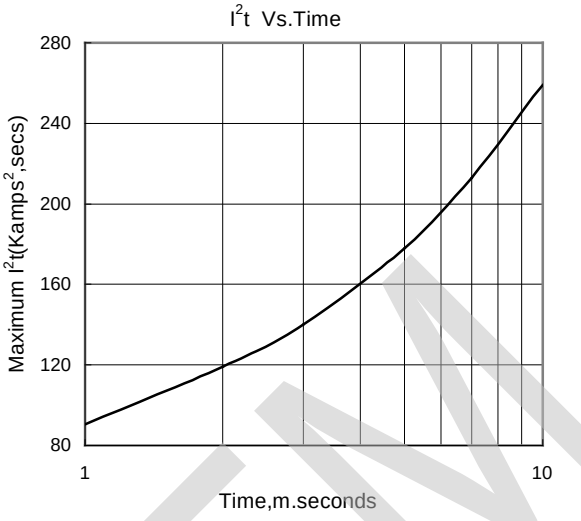

Fig.8

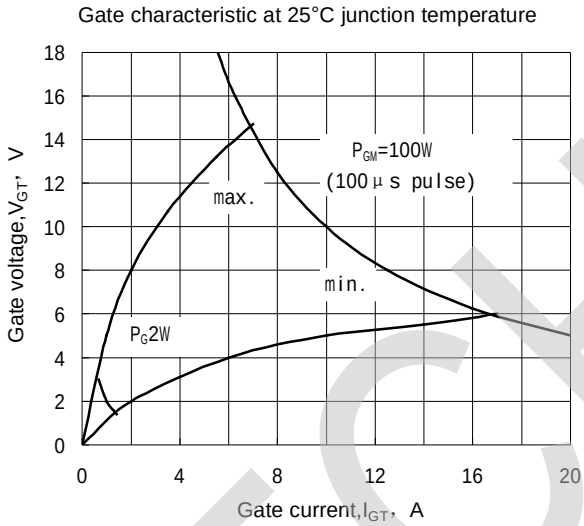

Fig.9

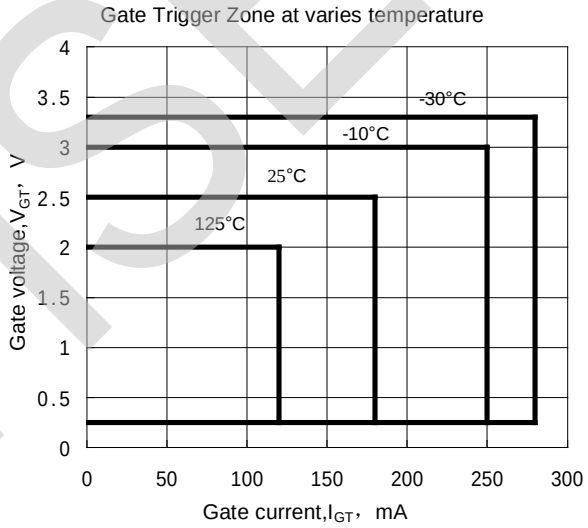

Fig.10

Outline:

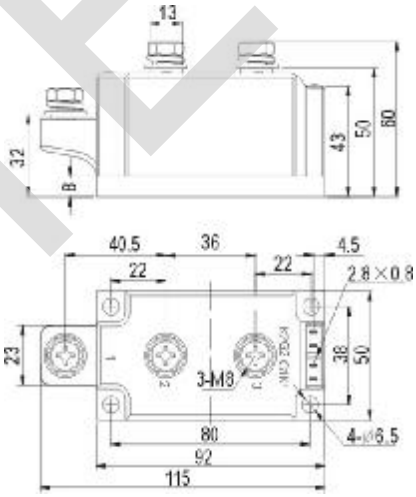

413F3