



ELECTRONICS

Product Information

ISSUE DATE : 2002-07-03

MODEL : LTM170EU-L01

Note : This Product information is subject to change after 3 months of issuing date

Prepared by AMLCD Technical Customer Service Team

Samsung Electronics Co . , LTD.

Contents

| | | |
|--|-------|------|
| General Description | ----- | (3) |
| 1. Absolute Maximum Ratings | ----- | (4) |
| 1.1 Absolute ratings of environment | | |
| 1.2 Electrical Absolute Ratings | | |
| 2. Optical Characteristics | ----- | (6) |
| 3. Electrical Characteristics | ----- | (9) |
| 3.1 TFT LCD Module | | |
| 3.2 Back-light Unit | | |
| 4. Block Diagram | ----- | (12) |
| 4.1 TFT LCD Module | | |
| 4.2 Back-light Unit | | |
| 5. Input Terminal Pin Assignment | ----- | (13) |
| 5.1 Input Signal & Power | | |
| 5.2 LVDS Interface (1) | | |
| 5.3 LVDS Interface (2) | | |
| 5.4 Back-light Unit | | |
| 5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color | | |
| 6. Interface Timing | ----- | (20) |
| 6.1 Timing Parameters (DE only mode) | | |
| 6.2 Timing Diagrams of Interface Signal (DE only mode) | | |
| 6.3 Power ON/OFF Sequence | | |
| 7. Outline Dimension | ----- | (23) |

General Description

* Description

LTM170EU-L01 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFTs as a switching devices. This model is composed of a TFT LCD panel, a driver circuit and a back-light system. The resolution of a 17.0" contains 1280 x 1024 pixels and can display up to 16.2 millions colors.

* Features

- High contrast ratio, high aperture structure
- TN(Twisted Nematic) mode
- Wide viewing angle
- High speed response
- SXGA(1280 x 1024 pixels) resolution
- Low power consumption
- 2 dual CCFTs(Cold Cathode Fluorescent Tube)
- DE(Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (2pixel/clock)
- Compact Size Design

* Applications

Workstation & desktop monitors

Display terminals for AV application products

Monitors for industrial machine

* General information

| Items | Specification | Unit | Note |
|-------------------|------------------------------|--------|------|
| Display area | 337.92(H) x 270.336(V) | mm | |
| Driver element | a-Si TFT active matrix | | |
| Display colors | 16.2M | colors | |
| Number of pixels | 1280 x 1024 | pixel | |
| Pixel arrangement | RGB vertical stripe | | |
| Pixel pitch | 0.264(H) x 0.264(W) | mm | |
| Display mode | Normally White | | |
| Surface treatment | Haze 25% , Hard-coating (3H) | | |

*** Mechanical information**

| Item | | Min. | Typ. | Max. | Note |
|-------------|---------------|-------|-------|-------|------|
| Module size | Horizontal(H) | 358.0 | 358.5 | 359.0 | mm |
| | Vertical(V) | 296.0 | 296.5 | 297.0 | mm |
| | Depth(D) | - | - | 17.5 | mm |
| Weight | | - | - | 2050 | g |

1. Absolute Maximum Ratings

1.1 Absolute ratings of environment


| Item | Symbol | Min. | Max. | Unit | Note |
|--|------------------|------|------|------|---------|
| Storage temperature | T _{STG} | -25 | 60 | °C | (1) |
| Operating temperature (Ambient temperature) | T _{OPR} | 0 | 50 | °C | (1) |
| Shock (non - operating) | Snop | - | 50 | G | (2),(4) |
| Vibration (non - operating) | Vnop | - | 1.5 | G | (3),(4) |

Note (1) Temperature and relative humidity range are shown in the figure below.

90 % RH Max. (40 °C ≥ Ta)

Maximum wet-bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

- (2) 11ms, sine wave, one time for ±X, ±Y, ±Z axis
- (3) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis
- (4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

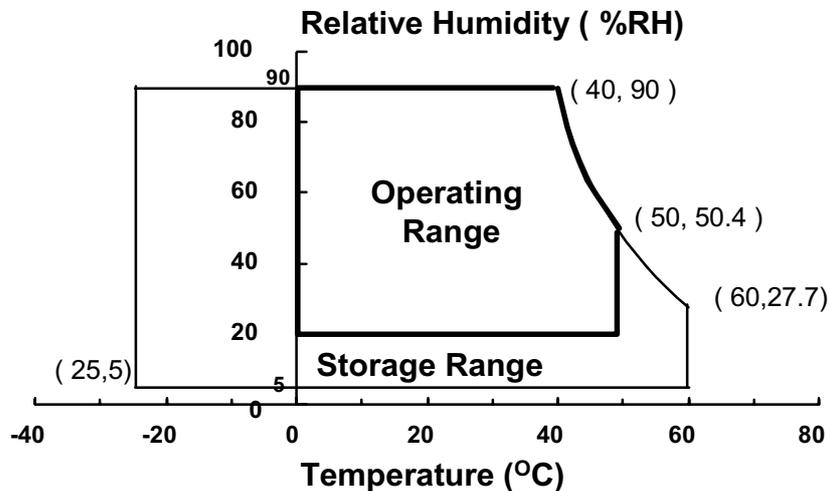

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD Module

(V_{ss} = GND = 0 V)

| Item | Symbol | Min. | Max. | Unit | Note |
|----------------------|--------|----------------------|------|------|------|
| Power Supply Voltage | VDD | V _{ss} -0.5 | 6.5 | V | (1) |

NOTE (1) Within Ta (25 ± 2 °C)

(2) BACK-LIGHT UNIT

(Ta = 25 ± 2°C)

| Item | Symbol | Min. | Max. | Unit. | Note |
|----------------|--------|------|------|-------|---------|
| Lamp Current | IL | 2.0 | 7.0 | mArms | (1),(2) |
| Lamp Frequency | fL | 50 | 60 | kHz | (1) |

NOTE (1) Permanent damage to the device may occur if maximum values are exceeded. Functional operation should be restricted to the conditions described under Normal Operating Conditions.

(2) Specified values are for a single lamp (Refer to the Note (1) in the page 12 for further information).

2. Optical Characteristics

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (1).

Measuring equipment : TOPCON BM-5A , BM-7, PHOTO RESEARCH PR650
Eldim EZ-Contrast

(Inverter Freq. : 54kHz) * Ta = 25 ± 2°C, VDD=5V, fv= 60Hz, fdCLK=54MHz, IL = 6.5mA_{rms}


| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Note |
|--|----------------|--------------------------------------|------------------|-------|---------------|-------------------|--------------|
| Contrast Ratio (Center of screen) | C/R | | 250 | 350 | - | | (3) BM-5A |
| Response Time | Rising | Tr | - | 5 | - | msec | (4) |
| | Falling | Tf | - | 20 | - | | BM-7 |
| Luminance of White (Center of screen) | YL | Normal $\phi = 0$ $\theta = 0$ | 200 | 250 | - | cd/m ² | (5) BM-5A |
| Color Chromaticity (CIE 1931) | Red | Rx | Viewing Angle | 0.633 | TYP. -0.03 | TYP. +0.03 | (6) PR650 |
| | | Ry | | 0.351 | | | |
| | Green | Gx | | 0.298 | | | |
| | | Gy | | 0.592 | | | |
| | Blue | Bx | | 0.143 | | | |
| | | By | | 0.092 | | | |
| | White | Wx | | 0.316 | | | |
| | | Wy | | 0.337 | | | |
| Viewing Angle | Hor. | θ L | CR \geq 10 | 60 | 70 | - | Degrees |
| | | θ R | | 60 | 70 | - | |
| | Ver. | ϕ H | | 50 | 60 | - | |
| | | ϕ L | | 50 | 60 | - | |
| Brightness Uniformity (9 Points) | Buni | | - | - | 25 | % | (4) BM-5A |
| Luminance | L _R | | - | - | 1.7 | | (9) |

Note 1) Test Equipment Setup

After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the back-light. This should be measured in the center of screen.


Single lamp current : 6.5mA (Refer to the note(1) in the page 11 for more information.)

Environment condition : $T_a = 25 \pm 2 \text{ } ^\circ\text{C}$

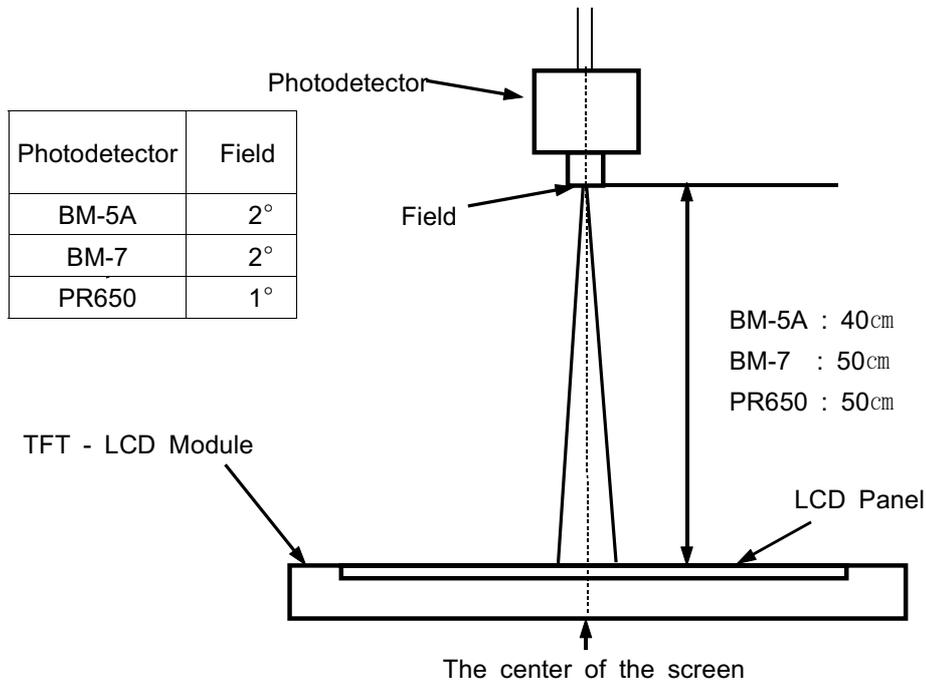

Optical Measuring Equipment Setup

Note 2) Definition of test point

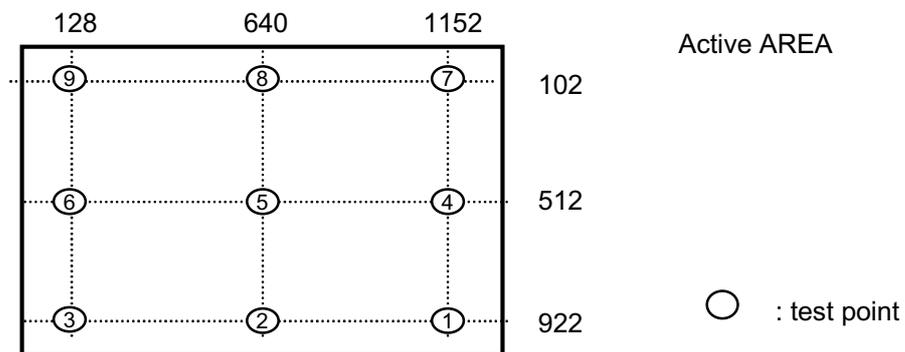

Note 3) Definition of Contrast Ratio (C/R) : Ratio of gray max (Gmax) & gray min (Gmin) at the center point(5) of the panel

$$CR = \frac{G_{\max}}{G_{\min}}$$

Gmax : Luminance with all pixels white


Gmin : Luminance with all pixels black

Note 4) Definition of 9 points brightness uniformity

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness, Bmin : Minimum brightness

Note 5) Definition of Response time : Sum of Tr ,Tf

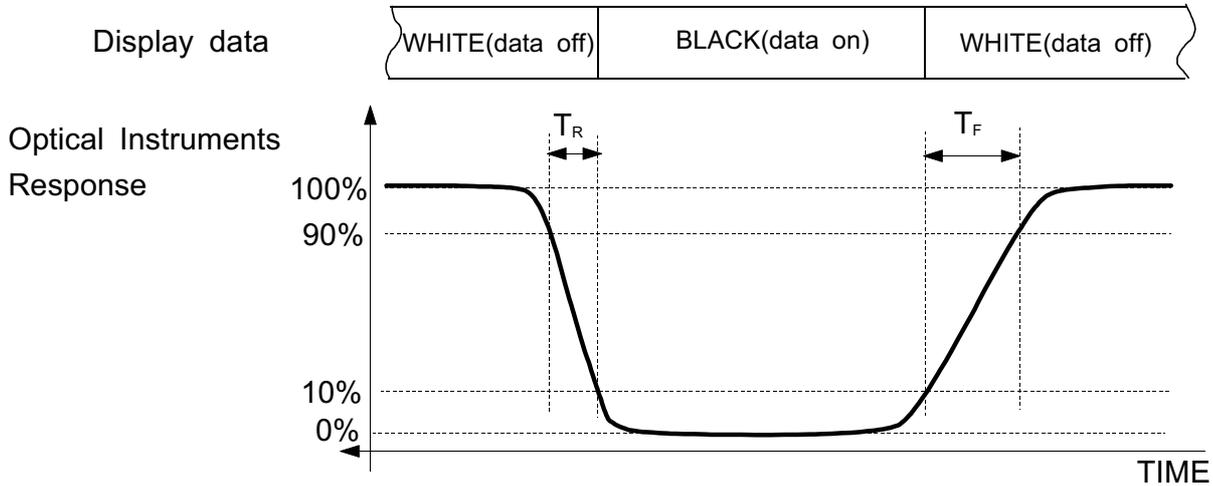


Note 6) Definition of Luminance of White : Luminance of white at center point(5).

Note 7) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red , Green , Blue & White at center point(5).

Note 8) Definition of Viewing Angle : Viewing angle range (CR ≥ 10)

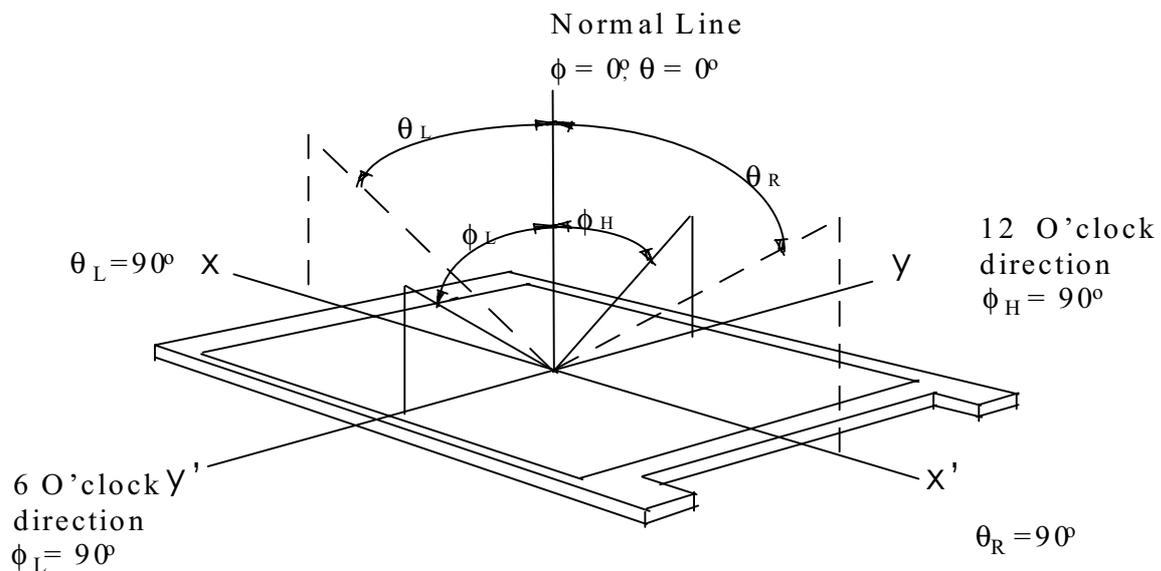

Note 9) TCO' 99 Certification Requirements and test methods

for Flat Panel Visual Display Units(VDUs) (1.5.2 Luminance Uniformity)

$$L_R = ((L_{max,+30deg.} / L_{min,+30deg.}) + (L_{max,-30deg.} / L_{min,-30deg.})) / 2$$

3. Electrical Characteristics

3.1 TFT LCD MODULE

Ta = 25°C


| Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|-------------------------|-------------------|--------------|------|---------------|------|---------|
| Voltage of Power Supply | V _{DD} | 4.5 | 5.0 | 5.5 | V | (1) |
| Interface type | LVDS | DS90C383/385 | | DS90C386 Pair | | |
| Current of Power Supply | (a) Black | - | 500 | | mA | (2),(3) |
| | (b) White | - | 400 | | mA | |
| | (c) Dot | - | 550 | 600 | mA | |
| Vsync Frequency | f _V | - | 60 | 75 | Hz | |
| Hsync Frequency | f _H | - | 64 | 79.976 | kHz | |
| Main Frequency | f _{DCLK} | - | 54 | 67.5 | MHz | |
| Rush Current | I _{RUSH} | - | - | 3.0 | A | (4) |

Note (1) f_V=60Hz, f_{DCLK} =54MHz, V_{DD} = 5.0V, DC Current.


(2) Main pixel clock frequency is the value which is measured at the input of LVDS transmitter.

(3) Power dissipation check pattern(LCD Module only)



a)Black Pattern




b)White Pattern

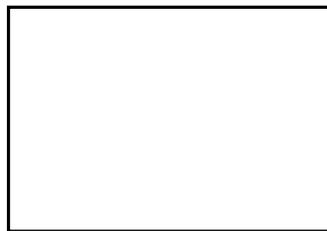

c) Dot Pattern

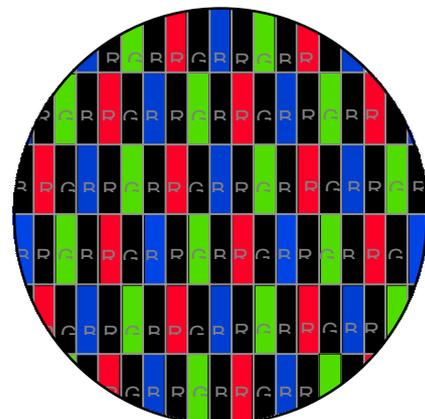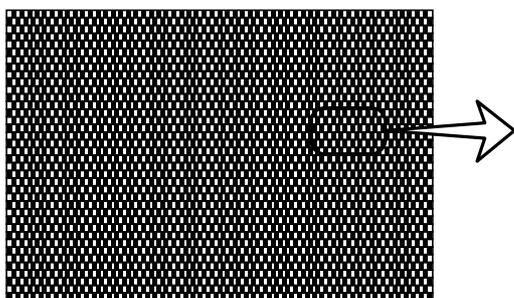


(4) Measurement Conditions

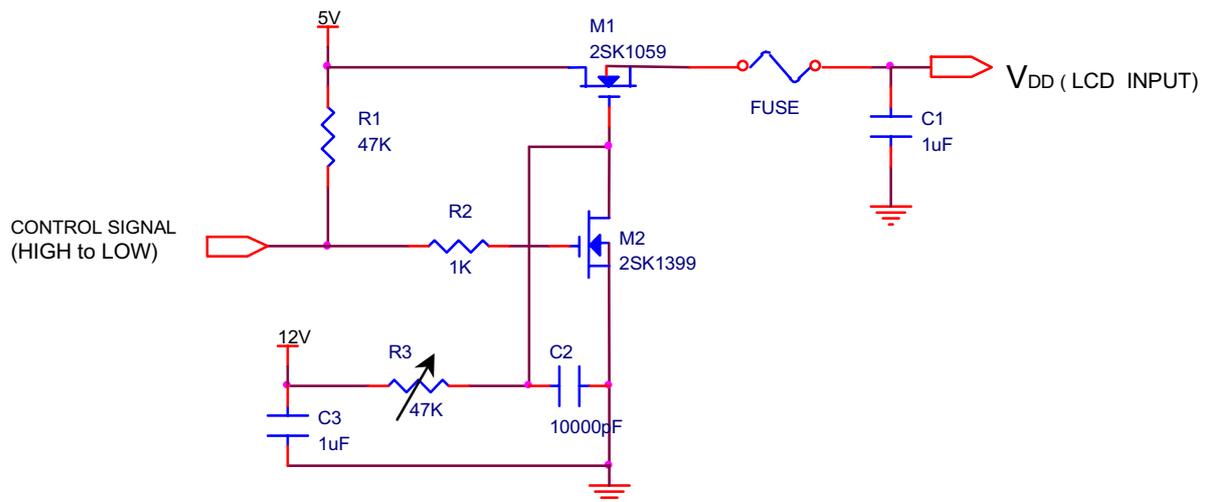

Note : Control Signal : High(+5V) -->Low(Ground)

All Signal lines to panel except for power 5V : Ground

The rising time of supplied voltage is controlled to 470us by R3 and C2 value.

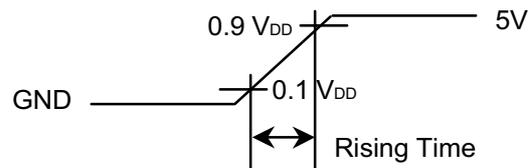

3.2 BACK-LIGHT UNIT

The back-light system is an edge - lighting type with 2 dual CCFTs (Cold Cathode Fluorescent Tube) The characteristics of two dual lamps are shown in the following tables.

Ta=25 ± 2°C

| Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|---------------------|--------|--------|--------|-------------|-------|------|
| Lamp Current | IL | 3.0 | 6.5 | 7.0 | mArms | (1) |
| Lamp Voltage | VL | 604 | 650 | 696 | Vrms | |
| Lamp Frequency | fL | 50 | - | 60 | kHz | (2) |
| Operating Life Time | Hr | 20,000 | 30,000 | - | Hour | (3) |
| Startup Voltage | Vs | - | - | 1,500(25°C) | Vrms | (4) |
| | | | | 1,700 (0°C) | | |

Note) The wave form of the inverter output voltage must be area symmetric and the design of the inverter must have specifications for the modularized lamp.


The performance of the back-light, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter.

When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the back-light and the inverter(miss lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Note (1) Lamp current is measured with current meter for high frequency as shown below.

Refer to the block diagram of the back-light unit in the next page for more information.

Specified values are for a single lamp.

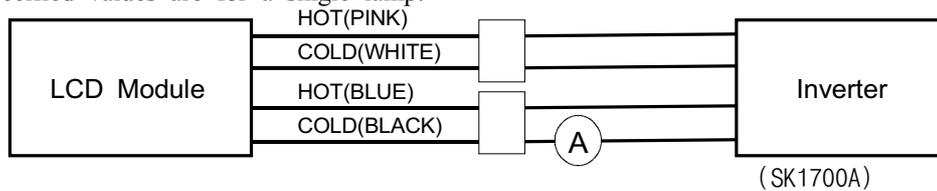


(2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency shall be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

(3) Life time (Hr) of a lamp is defined as the time in which it continues to operate under the condition of Ta = 25± 2°C and IL = 6.5 mArms until the brightness becomes 50% or lower than it's original value. A bare lamp life time is min. 50,000 hours at 6.0mA

(4) If an inverter has shutdown function it should keep its output for more than 1 second even if the lamp connector open. Otherwise the lamps may not to be turned on.


4. Block Diagram

4.1 TFT LCD MODULE

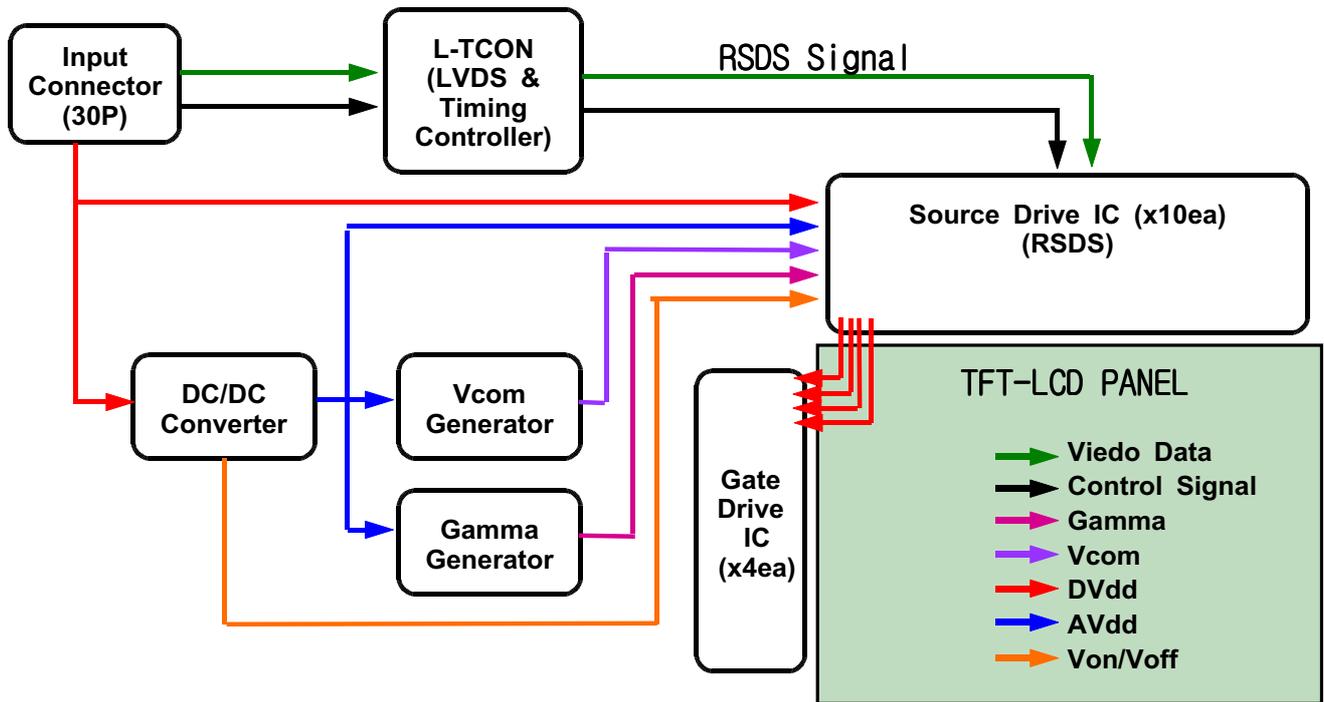

4.2 BACK-LIGHT UNIT

Connector: JST BHSR-02VS-1

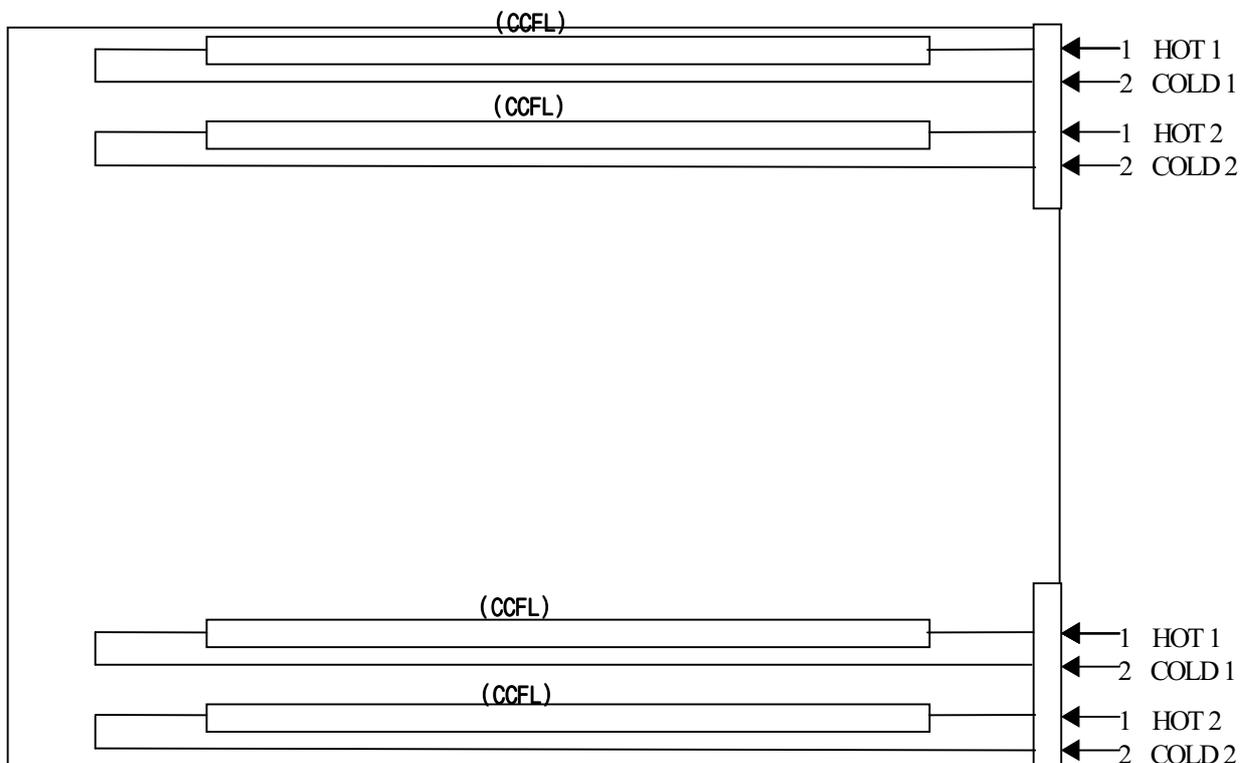


5. Input Terminal Pin Assignment

5.1. Input Signal & Power (Connector : JAE FI-X30S-HF,)

| PIN NO | SYMBOL | FUNCTION |
|--------|-----------------|---|
| 1 | V _{DD} | Power Supply : +5V |
| 2 | V _{DD} | |
| 3 | V _{DD} | |
| 4 | NC | No Connection |
| 5 | NC | No Connection |
| 6 | NC | No Connection |
| 7 | GND | Power Ground |
| 8 | RXE3+ | Positive Transmission Data of Pixel 3 (EVEN data) |
| 9 | RXE3- | Negative Transmission Data of Pixel 3 (EVEN data) |
| 10 | RXEC+ | Positive Sampling Clock (EVEN data) |
| 11 | RXEC- | Negative Sampling Clock (EVEN data) |
| 12 | RXE2+ | Positive Transmission Data of Pixel 2 (EVEN data) |
| 13 | RXE2- | Negative Transmission Data of Pixel 2 (EVEN data) |
| 14 | GND | Power Ground |
| 15 | RXE1+ | Positive Transmission Data of Pixel 1 (EVEN data) |
| 16 | RXE1- | Negative Transmission Data of Pixel 1 (EVEN data) |
| 17 | GND | Power Ground |
| 18 | RXE0+ | Positive Transmission Data of Pixel 0 (EVEN data) |
| 19 | RXE0- | Negative Transmission Data of Pixel 0 (EVEN data) |
| 20 | RXO3+ | Positive Transmission Data of Pixel 3 (ODD data) |
| 21 | RXO3- | Negative Transmission Data of Pixel 3 (ODD data) |
| 22 | RXOC+ | Positive Sampling Clock (ODD data) |
| 23 | RXOC- | Negative Sampling Clock (ODD data) |
| 24 | GND | Power Ground |
| 25 | RXO2+ | Positive Transmission Data of Pixel 2 (ODD data) |
| 26 | RXO2- | Negative Transmission Data of Pixel 2 (ODD data) |
| 27 | RXO1+ | Positive Transmission Data of Pixel 1 (ODD data) |
| 28 | RXO1- | Negative Transmission Data of Pixel 1 (ODD data) |
| 29 | RXO0+ | Positive Transmission Data of Pixel 0 (ODD data) |
| 30 | RXO0- | Negative Transmission Data of Pixel 0 (ODD data) |

Note) Start from Right side

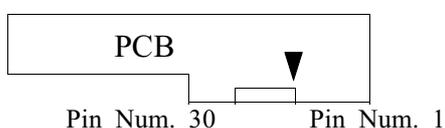

5.2 LVDS Interface(1)

5.2.1 Odd pixel data (1st pixel data)

| 1st LVDS Transmitter (<i>DS90C383</i> , <i>DS90C385</i>) Signal Interface | | | | | | |
|---|--------|---------------------|----------------------------|--------------------|---------------------------------|----------------|
| Device Input Pin | | Device Input Signal | | Output Signal | To LTM170EH Interface (CN101) | |
| No | Symbol | Symbol | Function | | Terminal | Symbol |
| 51 | TXIN0 | RO0 | Red Odd Pixel Data (LSB) | TXOUT0- TXOUT0+ | No. 1 | RXO0- RXO0+ |
| 52 | TXIN1 | RO1 | Red Odd Pixel Data | | | |
| 54 | TXIN2 | RO2 | Red Odd Pixel Data | | | |
| 55 | TXIN3 | RO3 | Red Odd Pixel Data | | | |
| 56 | TXIN4 | RO4 | Red Odd Pixel Data | | | |
| 2 | TXIN5 | RO7 | Red Odd Pixel Data (MSB) | TXOUT3- TXOUT3+ | No. 10 No. 11 | RXO3- RXO3+ |
| 3 | TXIN6 | RO5 | Red Odd Pixel Data | TXOUT0- TXOUT0+ | No. 1 No. 2 | RXO0- RXO0+ |
| 4 | TXIN7 | GO0 | Green Odd Pixel Data (LSB) | | | |
| 6 | TXIN8 | GO1 | Green Odd Pixel Data | TXOUT1- TXOUT1+ | No. 3 No. 4 | RXO1- RXO1+ |
| 7 | TXIN9 | GO2 | Green Odd Pixel Data | | | |
| 8 | TXIN10 | GO6 | Green Odd Pixel Data | TXOUT3- TXOUT3+ | No. 10 No. 11 | RXO3- RXO3+ |
| 10 | TXIN11 | GO7 | Green Odd Pixel Data (MSB) | | | |
| 11 | TXIN12 | GO3 | Green Odd Pixel Data | TXOUT1- TXOUT1+ | No. 3 No. 4 | RXO1- RXO1+ |
| 12 | TXIN13 | GO4 | Green Odd Pixel Data | | | |
| 14 | TXIN14 | GO5 | Green Odd Pixel Data | | | |
| 15 | TXIN15 | BO0 | Blue Odd Pixel Data (LSB) | TXOUT3- TXOUT3+ | No. 10 No. 11 | RXO3- RXO3+ |
| 16 | TXIN16 | BO6 | Blue Odd Pixel Data | | | |
| 18 | TXIN17 | BO7 | Blue Odd Pixel Data (MSB) | | | |
| 19 | TXIN18 | BO1 | Blue Odd Pixel Data | TXOUT1- TXOUT1+ | No. 3 No. 4 | RXO1- RXO1+ |
| 20 | TXIN19 | BO2 | Blue Odd Pixel Data | TXOUT2- TXOUT2+ | No. 5 No. 6 | RXO2- RXO2+ |
| 22 | TXIN20 | BO3 | Blue Odd Pixel Data | | | |
| 23 | TXIN21 | BO4 | Blue Odd Pixel Data | | | |
| 24 | TXIN22 | BO5 | Blue Odd Pixel Data | | | |
| 50 | TXIN27 | RO6 | Red Odd Pixel Data | TXOUT3- TXOUT3+ | No. 10 No. 11 | RXO3- RXO3+ |

5.2.2 Even pixel data (2nd pixel data)

| 2nd LVDS Transmitter (<i>DS90C383</i> , <i>DS90C385</i>) Signal Interface | | | | | | |
|---|--------|---------------------|-----------------------------|--------------------|---------------------------------|----------------|
| Device Input Pin | | Device Input Signal | | Output Signal | To LTM170EH Interface (CN101) | |
| No | Symbol | Symbol | Function | | Terminal | Symbol |
| 51 | TXIN0 | RE0 | Red Even Pixel Data (LSB) | TXOUT0- TXOUT0+ | No. 12 No. 13 | RXE0- RXE0+ |
| 52 | TXIN1 | RE1 | Red Even Pixel Data | | | |
| 54 | TXIN2 | RE2 | Red Even Pixel Data | | | |
| 55 | TXIN3 | RE3 | Red Even Pixel Data | | | |
| 56 | TXIN4 | RE4 | Red Even Pixel Data | | | |
| 2 | TXIN5 | RE7 | Red Even Pixel Data (MSB) | TXOUT3- TXOUT3+ | No. 22 No. 23 | RXE3- RXE3+ |
| 3 | TXIN6 | RE5 | Red Even Pixel Data | TXOUT0- TXOUT0+ | No. 12 No. 13 | RXE0- RXE0+ |
| 4 | TXIN7 | GE0 | Green Even Pixel Data (LSB) | | | |
| 6 | TXIN8 | GE1 | Green Even Pixel Data | TXOUT1- TXOUT1+ | No. 15 No. 16 | RXE1- RXE1+ |
| 7 | TXIN9 | GE2 | Green Even Pixel Data | | | |
| 8 | TXIN10 | GE6 | Green Even Pixel Data | TXOUT3- TXOUT3+ | No. 22 No. 23 | RXE3- RXE3+ |
| 10 | TXIN11 | GE7 | Green Even Pixel Data (MSB) | | | |
| 11 | TXIN12 | GE3 | Green Even Pixel Data | TXOUT1- TXOUT1+ | No. 15 No. 16 | RXE1- RXE1+ |
| 12 | TXIN13 | GE4 | Green Even Pixel Data | | | |
| 14 | TXIN14 | GE5 | Green Even Pixel Data | | | |
| 15 | TXIN15 | BE0 | Blue Even Pixel Data (LSB) | TXOUT3- TXOUT3+ | No. 22 No. 23 | RXE3- RXE3+ |
| 16 | TXIN16 | BE6 | Blue Even Pixel Data | | | |
| 18 | TXIN17 | BE7 | Blue Even Pixel Data (MSB) | | | |
| 19 | TXIN18 | BE1 | Blue Even Pixel Data | TXOUT1- TXOUT1+ | No. 15 No. 16 | RXE1- RXE1+ |
| 20 | TXIN19 | BE2 | Blue Even Pixel Data | TXOUT2- TXOUT2+ | No. 18 No. 19 | RXE2- RXE2+ |
| 22 | TXIN20 | BE3 | Blue Even Pixel Data | | | |
| 23 | TXIN21 | BE4 | Blue Even Pixel Data | | | |
| 24 | TXIN22 | BE5 | Blue Even Pixel Data | | | |
| 50 | TXIN27 | RE6 | Red Even Pixel Data | TXOUT3- TXOUT3+ | No. 22 No. 23 | RXE3- RXE3+ |

5.3 LVDS Interface (2)

5.3.1 Odd pixel data (1st pixel data)

| LVDS Transmitter (<i>DS90C387</i>) Signal Interface | | | | | | |
|---|--------|---------------------|----------------------------|---------------|---------------------------------|----------------|
| Device Input Pin | | Device Input Signal | | Output Signal | To LTM170EH Interface (CN101) | |
| No | Symbol | Symbol | Function | | Terminal | Symbol |
| 10 | R10 | RO0 | Red Odd Pixel Data (LSB) | A0M A0P | No. 1 | RXO0- RXO0+ |
| 9 | R11 | RO1 | Red Odd Pixel Data | | | |
| 8 | R12 | RO2 | Red Odd Pixel Data | | | |
| 7 | R13 | RO3 | Red Odd Pixel Data | | | |
| 6 | R14 | RO4 | Red Odd Pixel Data | | | |
| 3 | R17 | RO7 | Red Odd Pixel Data (MSB) | A3M A3P | No. 10 No. 11 | RXO3- RXO3+ |
| 5 | R15 | RO5 | Red Odd Pixel Data | A0M A0P | No. 1 No. 2 | RXO0- RXO0+ |
| 2 | G10 | GO0 | Green Odd Pixel Data (LSB) | | | |
| 1 | G11 | GO1 | Green Odd Pixel Data | A1M A1P | No. 3 No. 4 | RXO1- RXO1+ |
| 100 | G12 | GO2 | Green Odd Pixel Data | | | |
| 94 | G16 | GO6 | Green Odd Pixel Data | A3M A3P | No. 10 No. 11 | RXO3- RXO3+ |
| 93 | G17 | GO7 | Green Odd Pixel Data (MSB) | | | |
| 99 | G13 | GO3 | Green Odd Pixel Data | A1M A1P | No. 3 No. 4 | RXO1- RXO1+ |
| 96 | G14 | GO4 | Green Odd Pixel Data | | | |
| 95 | G15 | GO5 | Green Odd Pixel Data | | | |
| 92 | B10 | BO0 | Blue Odd Pixel Data (LSB) | A3M A3P | No. 10 No. 11 | RXO3- RXO3+ |
| 86 | B16 | BO6 | Blue Odd Pixel Data | | | |
| 85 | B17 | BO7 | Blue Odd Pixel Data (MSB) | A1M A1P | No. 3 No. 4 | RXO1- RXO1+ |
| 91 | B11 | BO1 | Blue Odd Pixel Data | | | |
| 90 | B12 | BO2 | Blue Odd Pixel Data | | | |
| 89 | B13 | BO3 | Blue Odd Pixel Data | A2M A2P | No. 5 No. 6 | RXO2- RXO2+ |
| 88 | B14 | BO4 | Blue Odd Pixel Data | | | |
| 87 | B15 | BO5 | Blue Odd Pixel Data | A3M A3P | No. 10 No. 11 | RXO3- RXO3+ |
| 4 | R16 | RO6 | Red Odd Pixel Data | | | |

5.3.2 Even pixel data (2nd pixel data)

| LVDS Transmitter (<i>DS90C387</i>) Signal Interface | | | | | | |
|---|--------|---------------------|-----------------------------|---------------|---------------------------------|----------------|
| Device Input Pin | | Device Input Signal | | Output Signal | To LTM170EH Interface (CN101) | |
| No | Symbol | Symbol | Function | | Terminal | Symbol |
| 84 | R20 | RE0 | Red Even Pixel Data (LSB) | A4M A4P | No. 12 No. 13 | RXE0- RXE0+ |
| 81 | R21 | RE1 | Red Even Pixel Data | | | |
| 80 | R22 | RE2 | Red Even Pixel Data | | | |
| 79 | R23 | RE3 | Red Even Pixel Data | | | |
| 78 | R24 | RE4 | Red Even Pixel Data | | | |
| 75 | R27 | RE7 | Red Even Pixel Data (MSB) | A7M A7P | No. 22 No. 23 | RXE3- RXE3+ |
| 77 | R25 | RE5 | Red Even Pixel Data | A4M A4P | No. 12 No. 13 | RXE0- RXE0+ |
| 74 | G20 | GE0 | Green Even Pixel Data (LSB) | | | |
| 73 | G21 | GE1 | Green Even Pixel Data | A5M A5P | No. 15 No. 16 | RXE1- RXE1+ |
| 72 | G22 | GE2 | Green Even Pixel Data | | | |
| 66 | G26 | GE6 | Green Even Pixel Data | A7M A7P | No. 22 No. 23 | RXE3- RXE3+ |
| 65 | G27 | GE7 | Green Even Pixel Data (MSB) | | | |
| 71 | G23 | GE3 | Green Even Pixel Data | A5M A5P | No. 15 No. 16 | RXE1- RXE1+ |
| 70 | G24 | GE4 | Green Even Pixel Data | | | |
| 69 | G25 | GE5 | Green Even Pixel Data | | | |
| 64 | B20 | BE0 | Blue Even Pixel Data (LSB) | A7M A7P | No. 22 No. 23 | RXE3- RXE3+ |
| 58 | B26 | BE6 | Blue Even Pixel Data | | | |
| 57 | B27 | BE7 | Blue Even Pixel Data (MSB) | | | |
| 63 | B21 | BE1 | Blue Even Pixel Data | A5M A5P | No. 15 No. 16 | RXE1- RXE1+ |
| 62 | B22 | BE2 | Blue Even Pixel Data | | | |
| 61 | B23 | BE3 | Blue Even Pixel Data | A6M A6P | No. 18 No. 19 | RXE2- RXE2+ |
| 60 | B24 | BE4 | Blue Even Pixel Data | | | |
| 59 | B25 | BE5 | Blue Even Pixel Data | | | |
| 76 | R26 | RE6 | Red Even Pixel Data | A7M A7P | No. 22 No. 23 | RXE3- RXE3+ |

NOTE)

Must be connected 24th BAL pin with low and 23th DUAL pin with high in DS90C387 LVDS Transmitter

5.4 BACK-LIGHT UNIT

| Pin No. | Input [ch1] ,[ch2] | Color | Fucntion |
|-----------------------|--------------------|-------|--------------|
| 1 | Hot1 | Pink | High Voltage |
| 2 | Cold1 | White | Ground |
| 3 | Hot2 | Blue | High Voltage |
| 4 | Cold2 | Black | Ground |
| Connector Part No. | JST BHSR-02VS-1 | | |

6. Interface Timing


6.1 Timing Parameters (DE only mode)

| SIGNAL | ITEM | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|-----------------------------------|--------------------------|--------|------|------|------|--------|
| Clock | Frequency | 1/Tc | 40 | 54 | 67.5 | MHz |
| | Hgh Time | TCH | 4 | - | - | nsec |
| | Low Time | TCL | 4 | - | - | nsec |
| Data | Setup Time | TDS | 4 | - | - | nsec |
| | Hold Time | TDH | 4 | - | - | nsec |
| Data Enable | Setup Time | TES | 4 | - | - | nsec |
| Frame Frequency | Cycle | Tv | - | 16.7 | 13.3 | msec |
| | | | 1031 | 1066 | - | lines |
| Vertical Active Disply Term | Display Period | TVD | 1024 | 1024 | 1024 | lines |
| | Verticle Blank Period | TVB | 8 | - | - | lines |
| One Line Scanning Time | Cycle | TH | 676 | 844 | 1130 | clocks |
| Horizontal Active Display Term | Display Period | THD | 640 | 640 | 640 | clocks |

Note (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system


(2) Internal Vcc = 3.0V

6.2 Timing diagrams of interface signal (DE only mode)

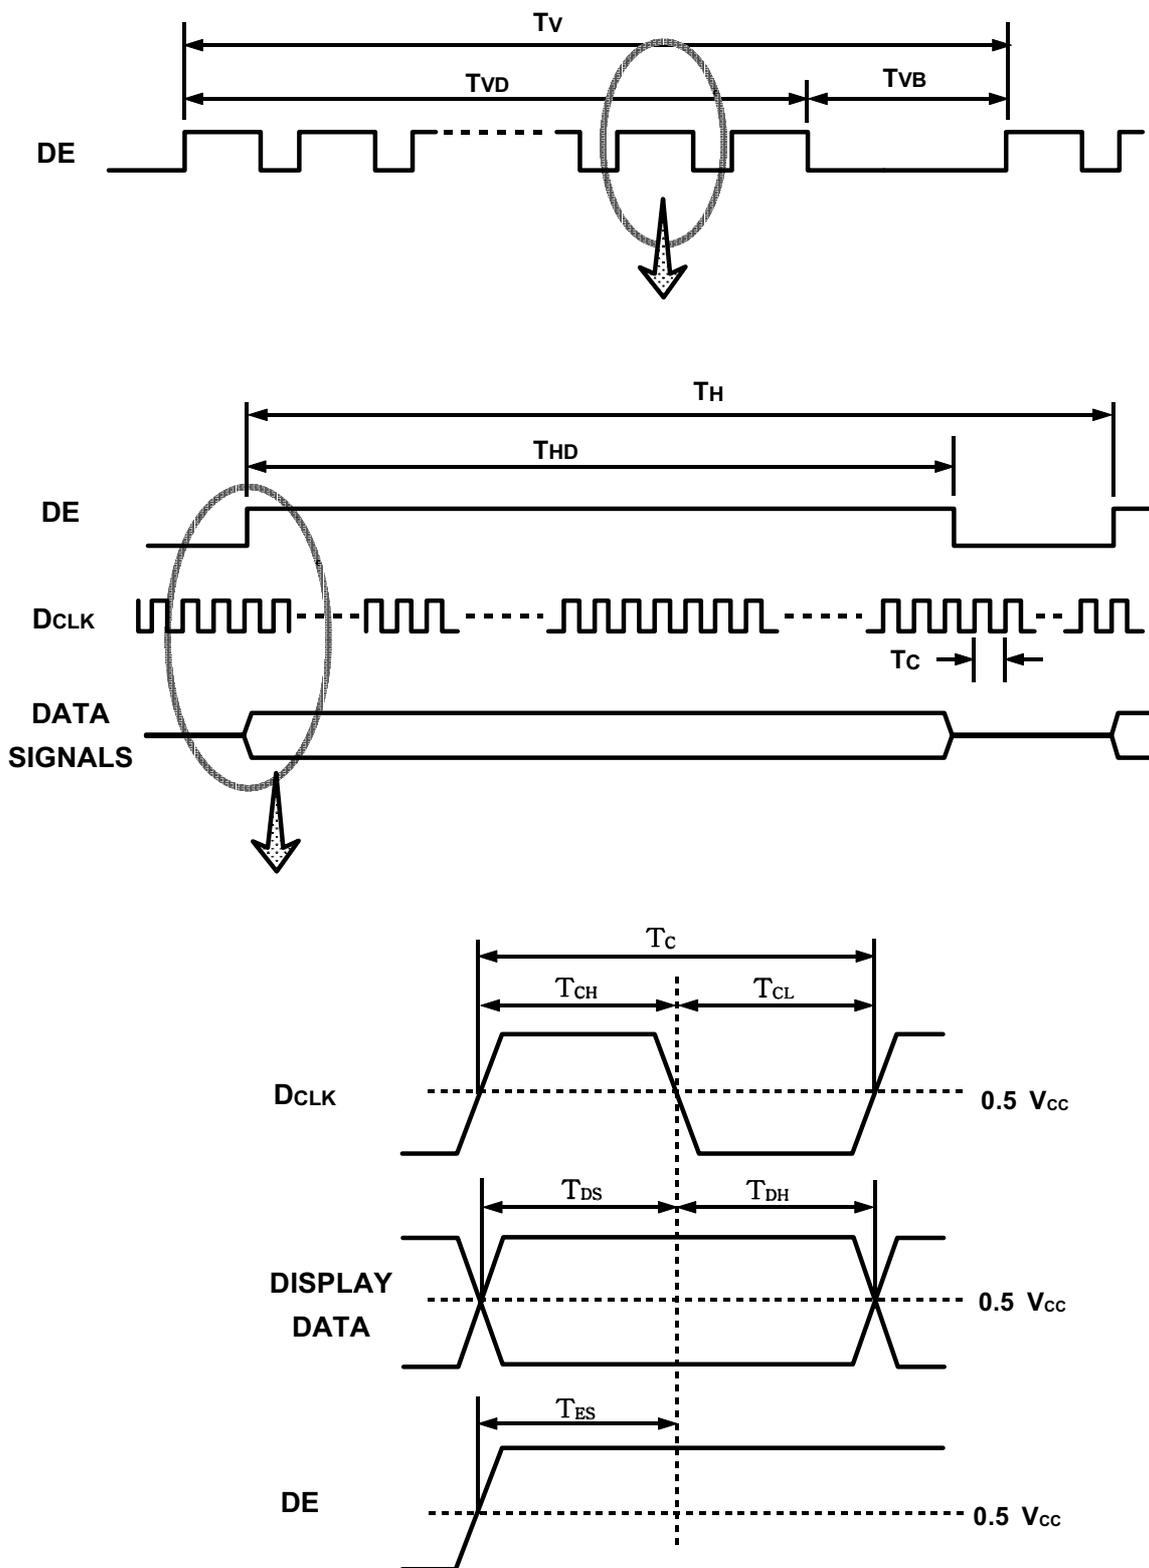

6.3 Power ON/OFF Sequence

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

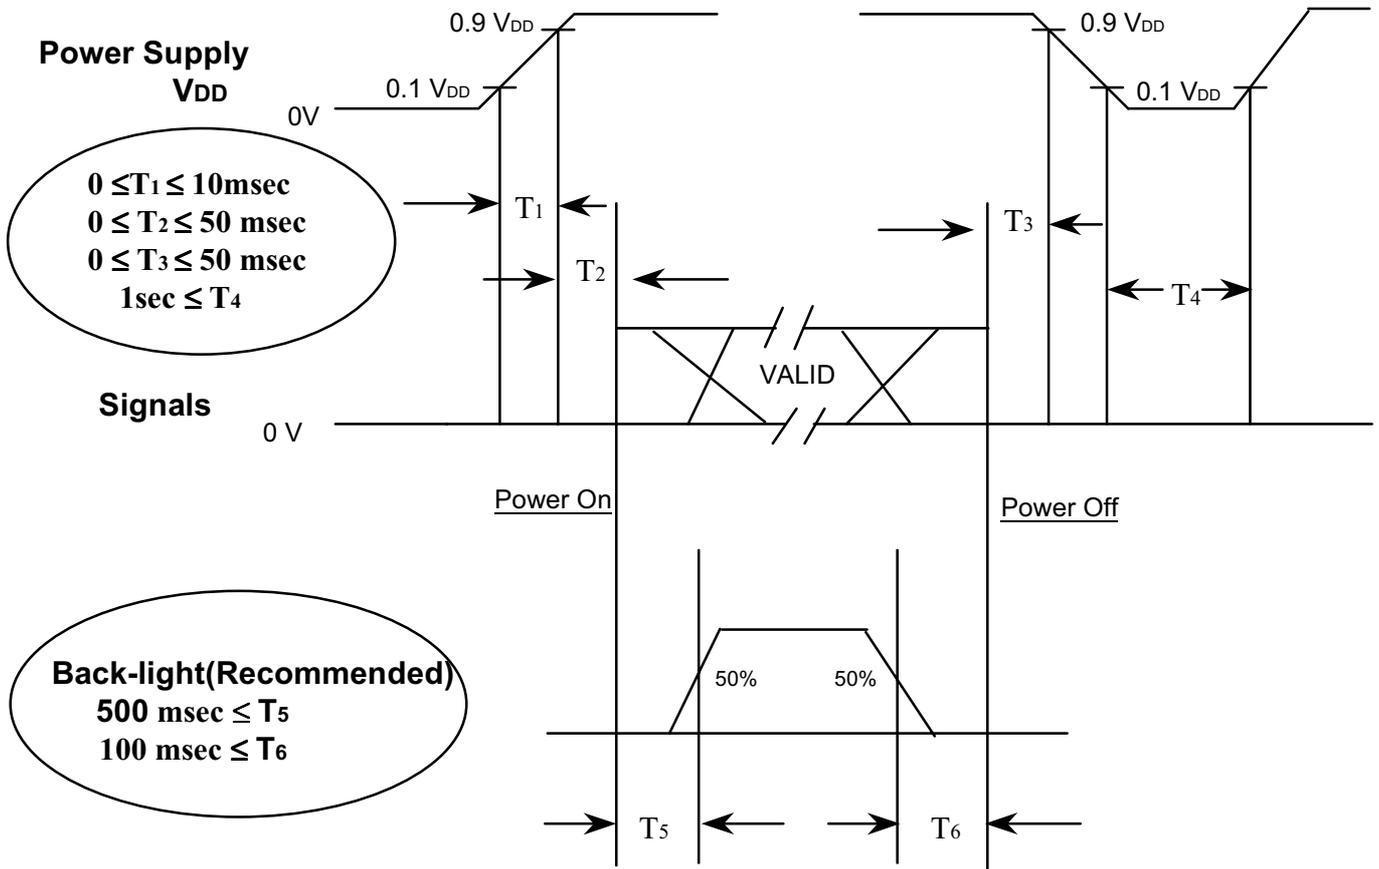

Power ON/OFF Sequence

NOTE.

- (1) The supply voltage of the external system for the module input should be the same as the definition of VDD.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become abnormal screen.
- (3) In case of VDD = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

7. Outline Dimension

[Refer to the next page]

