Features

- **Fast Read Access Time – 90 ns**
- **Dual Voltage Range Operation**
  - **Unregulated Battery Power Supply Range, 2.7V to 3.6V or Standard 5V ± 10% Supply Range**
- **Compatible with JEDEC Standard AT27C020**
- **Low-power CMOS Operation**
  - **20 µA Max (Less than 1 µA Typical) Standby for V_{CC} = 3.6V**
  - **29 mW Max Active at 5 MHz for V_{CC} = 3.6V**
- **Wide Selection of JEDEC Standard Packages**
  - **32-lead PLCC**
  - **32-lead TSOP**
  - **32-lead VSOP**
- **High Reliability CMOS Technology**
  - **2,000V ESD Protection**
  - **200 mA Latch-up Immunity**
- **Rapid Programming Algorithm – 100 µs/Byte (Typical)**
- **CMOS and TTL Compatible Inputs and Outputs**
  - **JEDEC Standard for LVTTL and LVBO**
- **Integrated Product Identification Code**
- **Industrial Temperature Range**
- **Green (Pb/Halide-free) Packaging Option**

2-megabit (256K x 8) Unregulated Battery-Voltage High-speed OTP EPROM

AT27BV020

1. Description

The AT27BV020 is a high-performance, low-power, low-voltage, 2,097,152-bit, one-time programmable, read-only memory (OTP EPROM) organized as 256K by 8 bits. It requires only one supply in the range of 2.7 to 3.6V in normal read mode operation, making it ideal for fast, portable systems using either regulated or unregulated battery power.

Atmel's innovative design techniques provide fast speeds that rival 5V parts while keeping the low power consumption of a 3V supply. At V_{CC} = 2.7V, any byte can be accessed in less than 90 ns. With a typical power dissipation of only 18 mW at 5 MHz and V_{CC} = 3V, the AT27BV020 consumes less than one fifth the power of a standard 5V EPROM. Standby mode supply current is typically less than 1 µA at 3V. The AT27BV020 simplifies system design and stretches battery lifetime even further by eliminating the need for power supply regulation

The AT27BV020 is available in industry-standard JEDEC approved one-time programmable (OTP) plastic PLCC, TSOP and VSOP packages, as well as a 42-ball, 1 mm pitch. All devices feature two-line control ($\overline{CE}$, $\overline{OE}$) to give designers the flexibility to prevent bus contention.

The AT27BV020 operating with V_{CC} at 3.0V produces TTL level outputs that are compatible with standard TTL logic devices operating at V_{CC} = 5.0V. At V_{CC} = 2.7V, the part is compatible with JEDEC approved low voltage battery operation (LVBO) interface specifications. The device is also capable of standard 5-volt operation making it ideally suited for dual supply range systems or card products that are pluggable in both 3-volt and 5-volt hosts.


0902E–EPROM–05/05

Atmel's AT27BV020 has additional features to ensure high quality and efficient production use. The Rapid Programming Algorithm reduces the time required to program the part and guarantees reliable programming. Programming time is typically only 100 µs/byte. The Integrated Product Identification Code electronically identifies the device and manufacturer. This feature is used by industry-standard programming equipment to select the proper programming algorithms and voltages. The AT27BV020 programs exactly the same way as a standard 5V AT27C020 and uses the same programming equipment.


2. Pin Configurations

Pin Name	Function
A0 - A17	Addresses
O0 - O7	Outputs
$\overline{CE}$	Chip Enable
$\overline{OE}$	Output Enable
$\overline{PGM}$	Program Strobe
NC	No Connect

2.1 32-lead TSOP, VSOP (Type 1) Top View

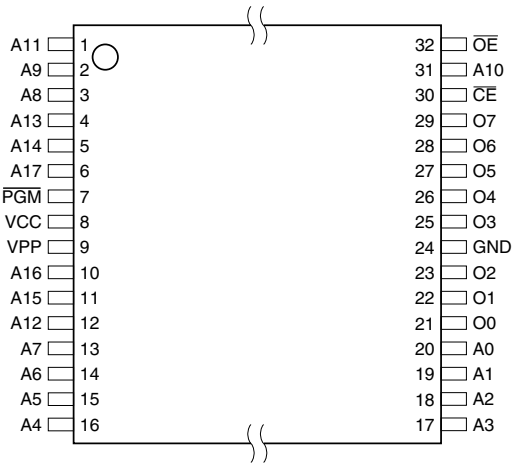


2.2 32-lead PLCC Top View

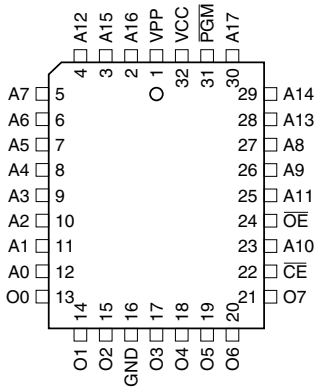

3. System Considerations

Switching between active and standby conditions via the Chip Enable pin may produce transient voltage excursions. Unless accommodated by the system design, these transients may exceed datasheet limits, resulting in device nonconformance. At a minimum, a 0.1 µF high frequency, low inherent inductance, ceramic capacitor should be utilized for each device. This capacitor should be connected between the V_{CC} and Ground terminals of the device, as close to the device as possible. Additionally, to stabilize the supply voltage level on printed circuit boards with large EPROM arrays, a 4.7 µF bulk electrolytic capacitor should be utilized, again connected between the V_{CC} and Ground terminals. This capacitor should be positioned as close as possible to the point where the power supply is connected to the array.

4. Block Diagram

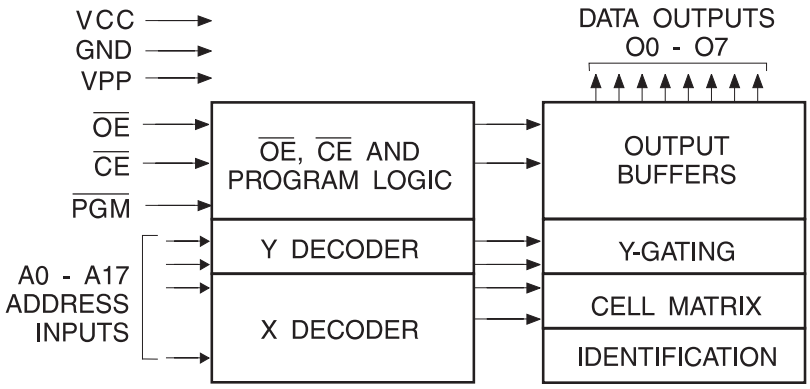

5. Absolute Maximum Ratings*

Temperature under Bias	-40°C to +85°C
Storage Temperature	-65°C to +125°C
Voltage on Any Pin with Respect to Ground	-2.0V to +7.0V[1]
Voltage on A9 with Respect to Ground	-2.0V to +14.0V[1]
V_{PP} Supply Voltage with Respect to Ground	-2.0V to +14.0V[1]

*NOTICE: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note: 1. Minimum voltage is -0.6V DC which may undershoot to -2.0V for pulses of less than 20 ns.Maximum output pin voltage is V_{CC} + 0.75V DC which may be exceeded if certain precautions are observed (consult application notes) and which may overshoot to +7.0V for pulses of less than 20 ns.

6. Operating Modes

Mode/Pin	$\overline{CE}$	$\overline{OE}$	$\overline{PGM}$	Ai	V_{PP}	V_{CC}	Outputs
Read[2]	V_{IL}	V_{IL}	X[1]	Ai	X	V_{CC}	D_{OUT}
Output Disable[2]	X	V_{IH}	X	X	X	V_{CC}	High-Z
Standby[2]	V_{IH}	X	X	X	X	V_{CC}	High-Z
Rapid Program[3]	V_{IL}	V_{IH}	V_{IL}	Ai	V_{PP}	V_{CC}	D_{IN}
PGM Verify[3]	V_{IL}	V_{IL}	V_{IH}	Ai	V_{PP}	V_{CC}	D_{OUT}
PGM Inhibit[3]	V_{IH}	X	X	X	V_{PP}	V_{CC}	High-Z
Product Identification[3][5]	V_{IL}	V_{IL}	X	A9 = V_H[4] A0 = V_{IH} or V_{IL} A1 - A17 = V_{IL}	X	V_{CC}	Identification Code

Notes:
1. X Can be V_{IL} or V_{IH}.
2. Read, output disable, and standby modes require, $2.7V \le V_{CC} \le 3.6V$, or $4.5V \le V_{CC} \le 5.5V$.
3. Refer to Programming Characteristics. Programming modes requires V_{CC} = 6.5V.
4. $V_H = 12.0 \pm 0.5V$.
5. Two identifier bytes may be selected. All Ai inputs are held low (V_{IL}), except A9 which is set to V_H and A0 which is toggled low (V_{IL}) to select the Manufacturer's Identification byte and high (V_{IH}) to select the Device Code byte.

7. DC and AC Operating Conditions for Read Operation

	AT27BV020-90
Industrial Operating Temperature (Case)	-40°C - 85°C
V_{CC} Power Supply	2.7V to 3.6V
	5V ± 10%

8. DC and Operating Characteristics for Read Operation

Symbol	Parameter	Condition	Min	Max	Units
V_{CC} = 2.7V to 3.6V					
I_{LI}	Input Load Current	V_{IN} = 0V to V_{CC}		±1	µA
I_{LO}	Output Leakage Current	V_{OUT} = 0V to V_{CC}		±5	µA
I_{PP1} (2)	V_{PP} (1) Read/Standby Current	V_{PP} = V_{CC}		10	µA
I_{SB}	V_{CC} (1) Standby Current	I_{SB1} (CMOS), $\overline{CE}$ = V_{CC} ± 0.3V		20	µA
		I_{SB2} (TTL), $\overline{CE}$ = 2.0 to V_{CC} + 0.5V		100	µA
I_{CC}	V_{CC} Active Current	f = 5 MHz, I_{OUT} = 0 mA, $\overline{CE}$ = V_{IL}, V_{CC} = 3.6V		8	mA
V_{IL}	Input Low Voltage	V_{CC} = 3.0 to 3.6V	-0.6	0.8	V
		V_{CC} = 2.7 to 3.6V	-0.6	0.2 x V_{CC}	V
V_{IH}	Input High Voltage	V_{CC} = 3.0 to 3.6V	2.0	V_{CC} + 0.5	V
		V_{CC} = 2.7 to 3.6V	0.7 x V_{CC}	V_{CC} + 0.5	V
V_{OL}	Output Low Voltage	I_{OL} = 2.0 mA		0.4	V
		I_{OL} = 100 µA		0.2	V
		I_{OL} = 20 µA		0.1	V
V_{OH}	Output High Voltage	I_{OH} = -2.0 mA	2.4		V
		I_{OH} = -100 µA	V_{CC} - 0.2		V
		I_{OH} = -20 µA	V_{CC} - 0.1		V
V_{CC} = 4.5V to 5.5V					
I_{LI}	Input Load Current	V_{IN} = 0V to V_{CC}		±1	µA
I_{LO}	Output Leakage Current	V_{OUT} = 0V to V_{CC}		±5	µA
I_{PP1} (2)	V_{PP} (1) Read/Standby Current	V_{PP} = V_{CC}		10	µA
I_{SB}	V_{CC} (1) Standby Current	I_{SB1} (CMOS), $\overline{CE}$ = V_{CC} ± 0.3V		100	µA
		I_{SB2} (TTL), $\overline{CE}$ = 2.0 to V_{CC} + 0.5V		1	mA
I_{CC}	V_{CC} Active Current	f = 5 MHz, I_{OUT} = 0 mA, $\overline{CE}$ = V_{IL}		25	mA
V_{IL}	Input Low Voltage		-0.6	0.8	V
V_{IH}	Input High Voltage		2.0	V_{CC} + 0.5	V
V_{OL}	Output Low Voltage	I_{OL} = 2.1 mA		0.4	V
V_{OH}	Output High Voltage	I_{OH} = -400 µA	2.4		V


Notes: 1. V_{CC} must be applied simultaneously with or before V_{PP}, and removed simultaneously with or after V_{PP}.
2. V_{PP} may be connected directly to V_{CC}, expect during programming. The supply current would then be the sum of I_{CC} and I_{PP}.

9. AC Characteristics for Read Operation

V_{CC} = 2.7V to 3.6V and 4.5V to 5.5V


Symbol	Parameter	Condition	AT27BV020-90		
			Min	Max	Units
t_{ACC}[3]	Address to Output Delay	$\overline{CE}$ = $\overline{OE}$ = V_{IL}		90	ns
t_{CE}[2]	$\overline{CE}$ to Output Delay	$\overline{OE}$ = V_{IL}		90	ns
t_{OE}[2][3]	$\overline{OE}$ to Output Delay	$\overline{CE}$ = V_{IL}		50	ns
t_{DF}[4][5]	$\overline{OE}$ or $\overline{CE}$ High to Output Float, Whichever Occurred First			40	ns
t_{OH}	Output Hold from Address, $\overline{CE}$ or $\overline{OE}$, Whichever Occurred First		0		ns

10. AC Waveforms for Read Operation[1]

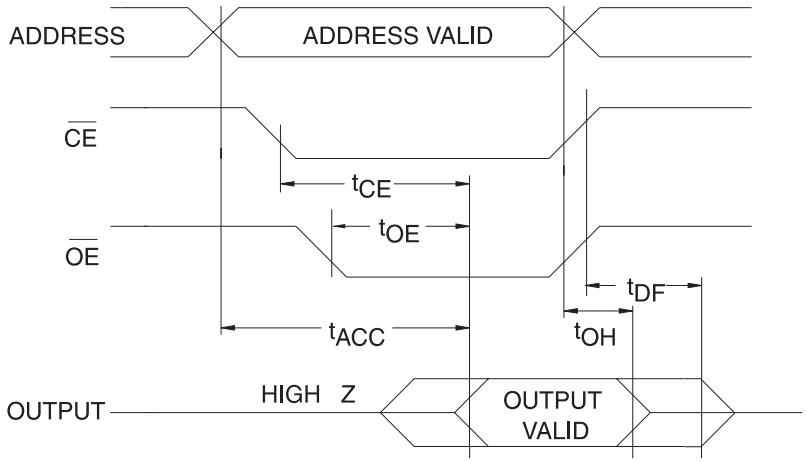


Notes:
1. Timing measurement references are 0.8V and 2.0V. Input AC drive levels are 0.45V and 2.4V, unless otherwise specified.
2. $\overline{OE}$ may be delayed up to t_{CE} - t_{OE} after the falling edge of $\overline{CE}$ without impact on t_{CE}.
3. $\overline{OE}$ may be delayed up to t_{ACC} - t_{OE} after the address is valid without impact on t_{ACC}.
4. This parameter is only sampled and is not 100% tested.
5. Output float is defined as the point when data is no longer driven.

11. Input Test Waveform and Measurement Level

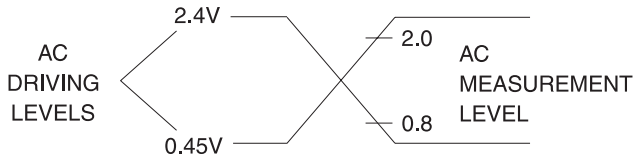

t_R, t_F < 20 ns (10% to 90%)

12. Output Test Load



Note: CL = 100 pF including jig capacitance.


13. Pin Capacitance

f = 1 MHz, T = 25°C[1]

Symbol	Typ	Max	Units	Conditions
C_{IN}	4	8	pF	V_{IN} = 0V
C_{OUT}	8	12	pF	V_{OUT} = 0V

Note: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested.

14. Programming Waveforms[1]

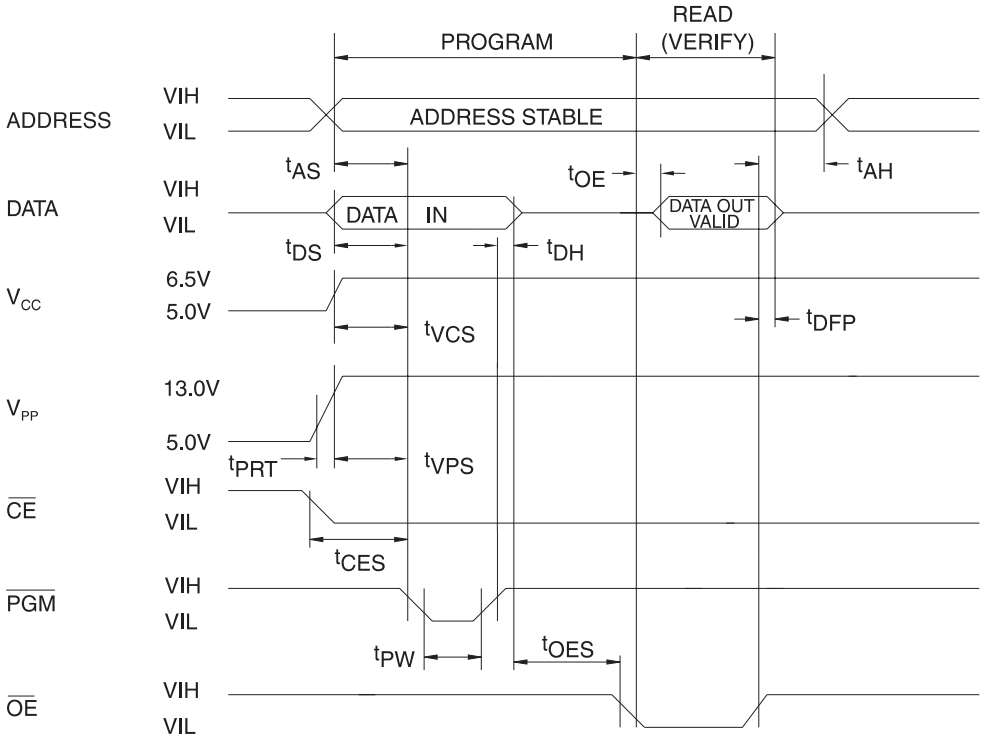

Notes: 1. The Input Timing Reference is 0.8V for V_{IL} and 2.0V for V_{IH}.

2. t_{OE} and t_{DFP} are characteristics of the device but must be accommodated by the programmer.

3. When programming the AT27BV020 a 0.1 µF capacitor is required across V_{PP} and ground to suppress spurious voltage transients.

15. DC Programming Characteristics

T_A = 25 ± 5°C, V_{CC} = 6.5 ± 0.25V, V_{PP} = 13.0 ± 0.25V

Symbol	Parameter	Test Conditions	Limits		Units
			Min	Max	
I_{LI}	Input Load Current	$V_{IN} = V_{IL}, V_{IH}$		±10	µA
V_{IL}	Input Low Level		-0.6	0.8	V
V_{IH}	Input High Level		2.0	V_{CC} + 0.5	V
V_{OL}	Output Low Voltage	I_{OL} = 2.1 mA		0.4	V
V_{OH}	Output High Voltage	I_{OH} = -400 µA	2.4		V
I_{CC2}	V_{CC} Supply Current (Program and Verify)			40	mA
I_{PP2}	V_{PP} Supply Current	$\overline{CE} = \overline{PGM} = V_{IL}$		20	mA
V_{ID}	A9 Product Identification Voltage		11.5	12.5	V

16. AC Programming Characteristics

T_A = 25 ± 5°C, V_{CC} = 6.5 ± 0.25V, V_{PP} = 13.0 ± 0.25V

Symbol	Parameter	Test Conditions[1]	Limits		Units
			Min	Max	
t_{AS}	Address Setup Time	Input Rise and Fall Times: (10% to 90%) 20 ns Input Pulse Levels: 0.45V to 2.4V Input Timing Reference Level: 0.8V to 2.0V Output Timing Reference Level: 0.8V to 2.0V	2		µs
t_{CES}	$\overline{CE}$ Setup Time		2		µs
t_{OES}	$\overline{OE}$ Setup Time		2		µs
t_{DS}	Data Setup Time		2		µs
t_{AH}	Address Hold Time		0		µs
t_{DH}	Data Hold Time		2		µs
t_{DFP}	$\overline{OE}$ High to Output Float Delay[3]		0	130	ns
t_{VPS}	V_{PP} Setup Time		2		µs
t_{VCS}	V_{CC} Setup Time		2		µs
t_{PW}	$\overline{PGM}$ Program Pulse Width[2]		95	105	µs
t_{OE}	Data Valid from $\overline{OE}$			150	ns
t_{PRT}	V_{PP} Pulse Rise Time During Programming		50		ns

Notes:
1. V_{CC} must be applied simultaneously or before V_{PP} and removed simultaneously or after V_{PP}.
2. This parameter is only sampled and is not 100% tested. Output Float is defined as the point where data is no longer driven – see timing diagram.
3. Program Pulse width tolerance is 100 µsec ± 5%.


17. Atmel's AT27BV020 Integrated Product Identification Code[1]

Codes	Pins									Hex Data
	A0	O7	O6	O5	O4	O3	O2	O1	O0	
Manufacturer	0	0	0	0	1	1	1	1	0	1E
Device Type	1	1	0	0	0	0	1	1	0	86

Note: 1. The AT27BV020 has the same Product Identification Code as the AT27C020. Both are programming compatible.

18. Rapid Programming Algorithm

A 100 µs $\overline{PGM}$ pulse width is used to program. The address is set to the first location. V_{CC} is raised to 6.5V and V_{PP} is raised to 13.0V. Each address is first programmed with one 100 µs $\overline{PGM}$ pulse without verification. Then a verification/reprogramming loop is executed for each address. In the event a byte fails to pass verification, up to 10 successive 100 µs pulses are applied with a verification after each pulse. If the byte fails to verify after 10 pulses have been applied, the part is considered failed. After the byte verifies properly, the next address is selected until all have been checked. V_{PP} is then lowered to 5.0V and V_{CC} to 5.0V. All bytes are read again and compared with the original data to determine if the device passes or fails.

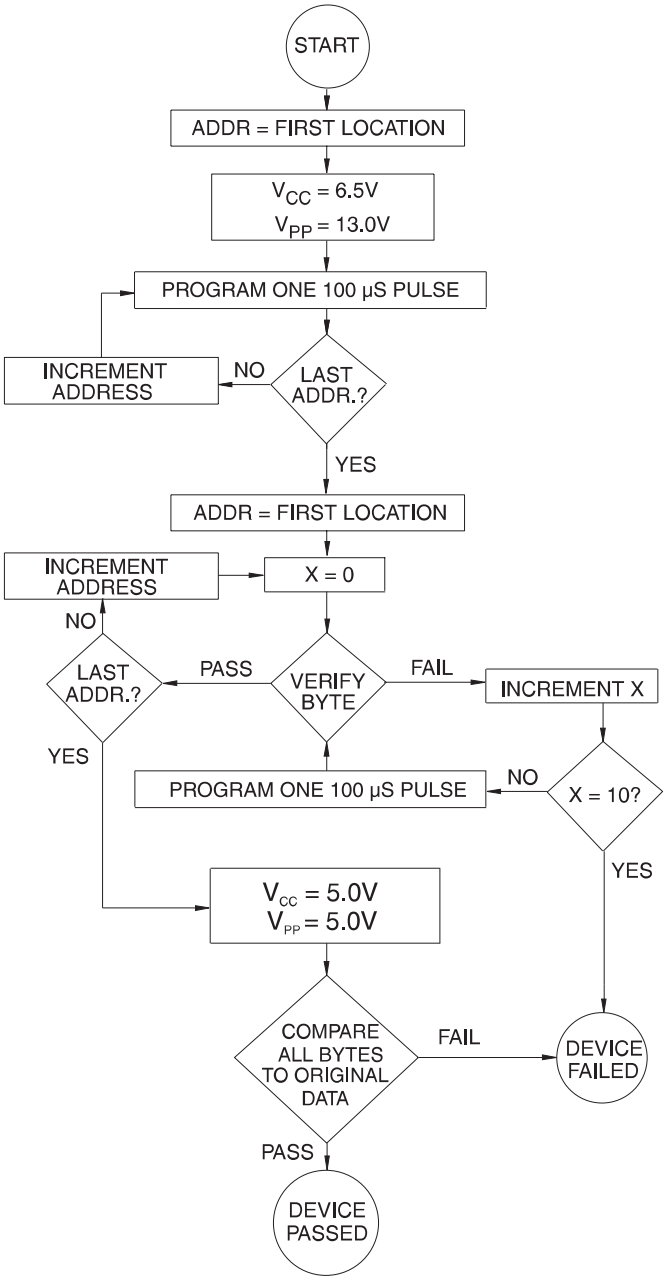

19. Ordering Information

19.1 Standard Package

t_{ACC} (ns)	I_{CC} (mA) V_{CC} = 3.6V		Ordering Code	Package	Operation Range
	Active	Standby			
90	8	0.02	AT27BV020-90JI AT27BV020-90TI AT27BV020-90VI	32J 32T 32V	Industrial (-40°C to 85°C)

Note: Refer to PCN# SC042702.


19.2 Green Package Option (Pb/Halide-free)

t_{ACC} (ns)	I_{CC} (mA) V_{CC} = 3.6V		Ordering Code	Package	Operation Range
	Active	Standby			
90	8	0.02	AT27BV020-90JU AT27BV020-90TU	32J 32T	Industrial (-40°C to 85°C)

Package Type	
32J	32-lead, Plastic J-leaded Chip Carrier (PLCC)
32T	32-lead, Plastic Thin Small Outline Package (TSOP)
32V	32-lead, Plastic Thin Small Outline Package (VSOP)

20. Packaging Information

20.1 32J – PLCC

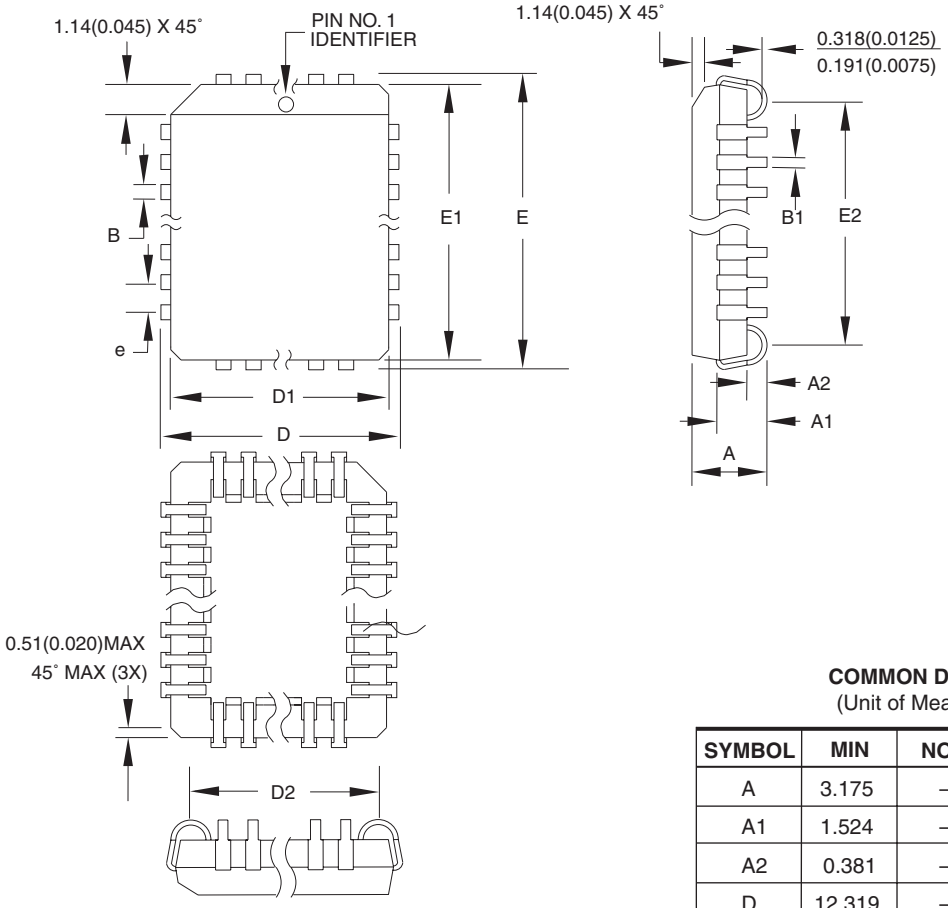

COMMON DIMENSIONS
(Unit of Measure = mm)


SYMBOL	MIN	NOM	MAX	NOTE
A	3.175	–	3.556	
A1	1.524	–	2.413	
A2	0.381	–	–	
D	12.319	–	12.573	
D1	11.354	–	11.506	Note 2
D2	9.906	–	10.922	
E	14.859	–	15.113	
E1	13.894	–	14.046	Note 2
E2	12.471	–	13.487	
B	0.660	–	0.813	
B1	0.330	–	0.533	
e	1.270 TYP			

Notes:
1. This package conforms to JEDEC reference MS-016, Variation AE.
2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is .010"(0.254 mm) per side. Dimension D1 and E1 include mold mismatch and are measured at the extreme material condition at the upper or lower parting line.
3. Lead coplanarity is 0.004" (0.102 mm) maximum.

10/04/01

	TITLE	DRAWING NO.	REV.
2325 Orchard Parkway San Jose, CA 95131	**32J**, 32-lead, Plastic J-leaded Chip Carrier (PLCC)	32J	B

20.2 32T – TSOP

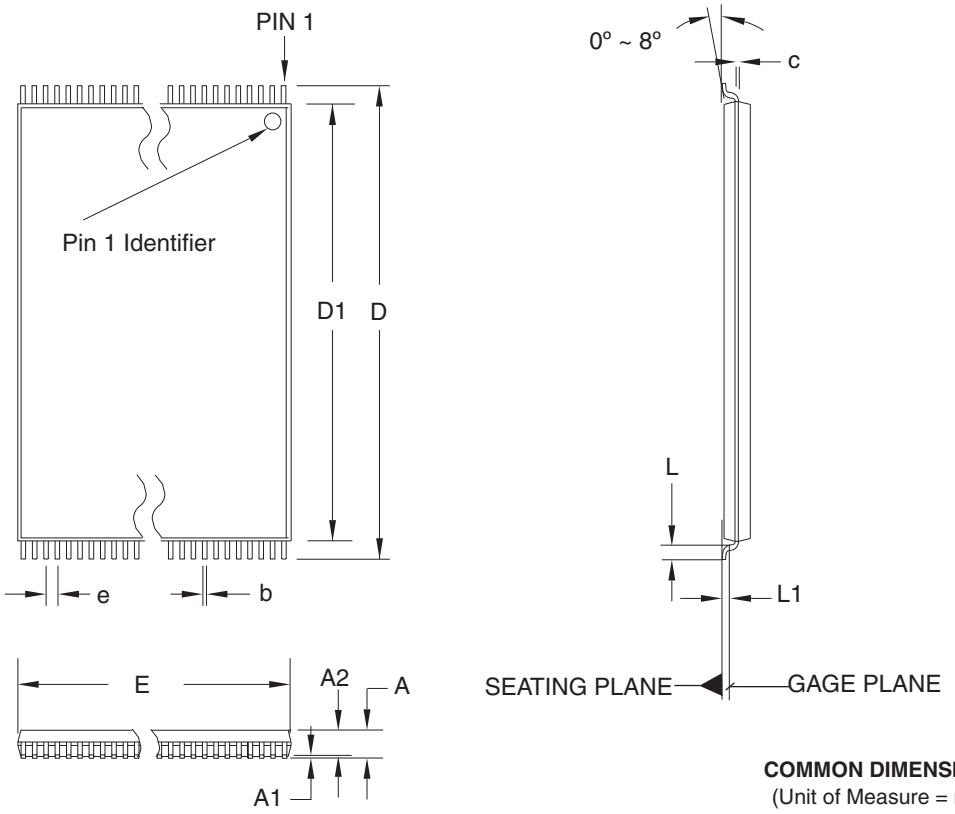

COMMON DIMENSIONS
(Unit of Measure = mm)


SYMBOL	MIN	NOM	MAX	NOTE
A	–	–	1.20	
A1	0.05	–	0.15	
A2	0.95	1.00	1.05	
D	19.80	20.00	20.20	
D1	18.30	18.40	18.50	Note 2
E	7.90	8.00	8.10	Note 2
L	0.50	0.60	0.70	
L1	0.25 BASIC			
b	0.17	0.22	0.27	
c	0.10	–	0.21	
e	0.50 BASIC			

Notes:
1. This package conforms to JEDEC reference MO-142, Variation BD.
2. Dimensions D1 and E do not include mold protrusion. Allowable protrusion on E is 0.15 mm per side and on D1 is 0.25 mm per side.
3. Lead coplanarity is 0.10 mm maximum.

10/18/01

	TITLE	DRAWING NO.	REV.
2325 Orchard Parkway San Jose, CA 95131	**32T**, 32-lead (8 x 20 mm Package) Plastic Thin Small Outline Package, Type I (TSOP)	32T	B

20.3 32V – VSOP

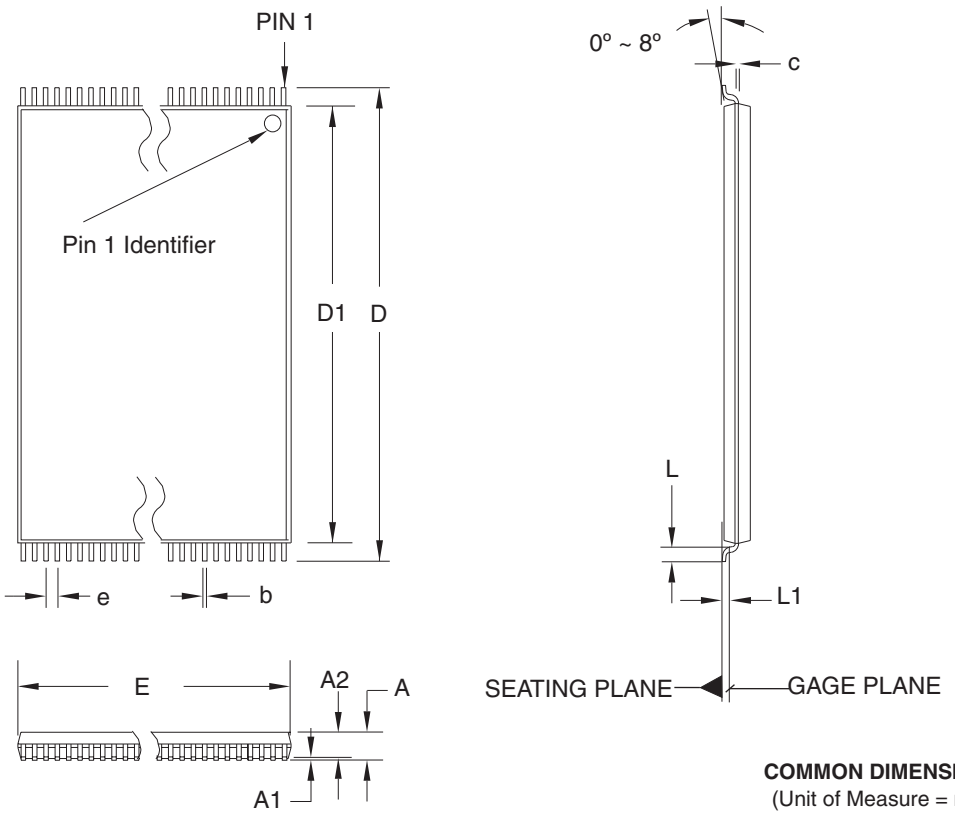

COMMON DIMENSIONS
(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
A	–	–	1.20	
A1	0.05	–	0.15	
A2	0.95	1.00	1.05	
D	13.80	14.00	14.20	
D1	12.30	12.40	12.50	Note 2
E	7.90	8.00	8.10	Note 2
L	0.50	0.60	0.70	
L1	0.25 BASIC			
b	0.17	0.22	0.27	
c	0.10	–	0.21	
e	0.50 BASIC			

Notes:
1. This package conforms to JEDEC reference MO-142, Variation BA.
2. Dimensions D1 and E do not include mold protrusion. Allowable protrusion on E is 0.15 mm per side and on D1 is 0.25 mm per side.
3. Lead coplanarity is 0.10 mm maximum.

10/18/01

	TITLE	DRAWING NO.	REV.
2325 Orchard Parkway San Jose, CA 95131	**32V**, 32-lead (8 x 14 mm Package) Plastic Thin Small Outline Package, Type I (VSOP)	32V	B

Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
Tel: (41) 26-426-5555
Fax: (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
Tel: (33) 2-40-18-18-18
Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
Tel: (33) 4-42-53-60-00
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
Tel: (44) 1355-803-000
Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
Tel: (49) 71-31-67-0
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/
High Speed Converters/RF Datacom

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
Tel: (33) 4-76-58-30-00
Fax: (33) 4-76-58-34-80

Literature Requests
www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2005. **All rights reserved.** Atmel®, logo and combinations thereof, Everywhere You Are® and others, are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Printed on recycled paper.

0902E–EPROM–05/05