

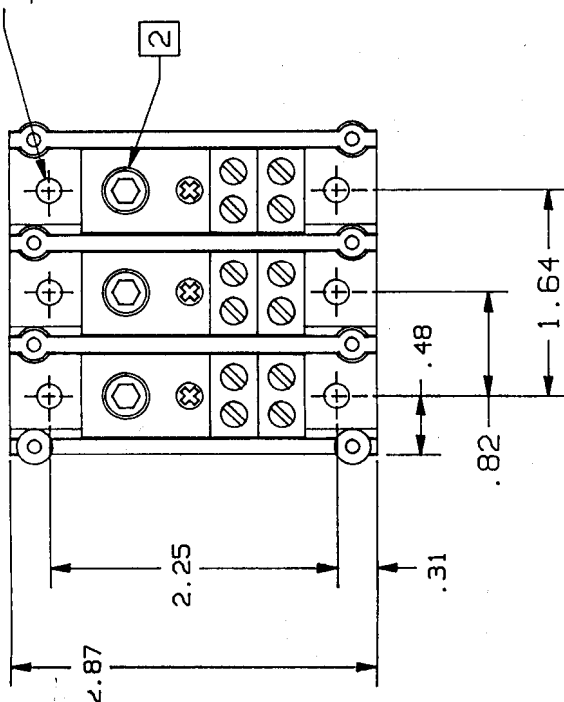


REV	DESCRIPTION	DATE	APPD
01	REVISED PER ECO 91-051	11/91	BM

.20 ϕ X .125 DP
TYP
6 PLCS

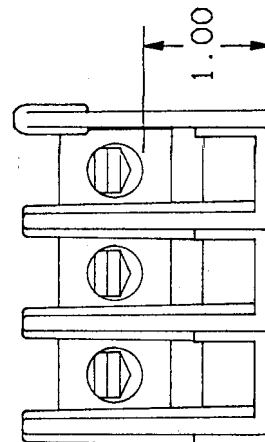

P/N	WIRE RANGE & TORQUE (IN-LBS)					U/L	FILE NO.	GUIDE NO.	REPORT NO	CSA
	PRIMARY		SECONDARY							
	RANGE	TORQUE	RANGE	TORQUE	TORQUE					
62133	2/0-#14	2/0-#3	50	# 4-#14	# 4-#6	35	E73571	XCFR2	LR69363	
		#4-#6	45		#8	25				
		#8	40		#10-#14	20				
		#10-#14	35		#4-#6	35				
63133	2/0-#14	2/0-#6	120	# 4-#14	#8	25	E73571	XCFR2	LR69363	
		#8-#14	50		#10-#14	20				

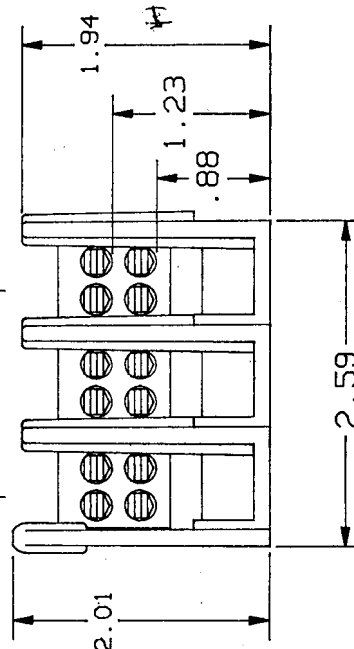

REFERENCE

MAR 16 1992

P/N 62133 (CU ONLY)
P/N 63133 (CU-AL)

NOTES UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN INCHES
- STAMP OR ETCH Dwg. NO. ON PART
- REMOVE ALL BURRS AND SHARP EDGES
- TOLERANCES: XXXX+.0005; XXXX-.005;
XX+.01; X+.04; X/X31/32; ANGLES $\pm 0^{\circ}30'$

THIS DRAWING AND ALL INFORMATION THEREON
IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL.
MUST NOT BE COPIED OR MADE PUBLIC UNLESS
AUTHORIZED AND IS SUBJECT TO RETURN ON
DEMAND.

ASSY Dwg
USED ON

REF OR
5TH Dwg

MATERIAL	SEE NOTE 1	GOULD SHAWMUT
FINISH	N/A	GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654
SIGNATURES	DATE	PRODUCT INFO
DRIN	CW	11/90
CHKD	GO	11/90
ENGD		
APPD	BM	11/90
TITLE	PDB, (1)2/0-#14X (4)#4-14 3 POLE 600V	REV
DWG NO	05B0365	01
SCALE	NONE	FILE NO
SHEET	1 OF 1	

2 P/N 62133 USES SLOTTED SET SCREW
P/N 63133 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.
NOTES: UNLESS OTHERWISE SPECIFIED