



Catalog Number:
Item Description:
UPC Code:

U3000-O-5T9-K3L-K2L
320A 5T RL SWY HD LVR UG
784572300491

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket

Standard: UL Listed

Voltage Rating: 600 Volts Alternating Current

Amperage Rating: 320 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 0

Cable Entry: Underground, Side Wireway

Terminal: Single Mechanical Line Side and
Double Mechanical Load Side



Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with
Powder Coat Finish



Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	¼ SOLID K.O.
C	1	¼, ½ CONC. K.O.
D	5	1¼, 1½, 2, 2½, 3 CONC. K.O.

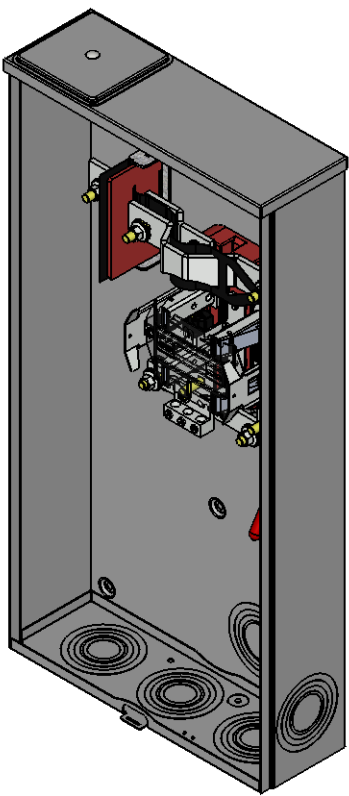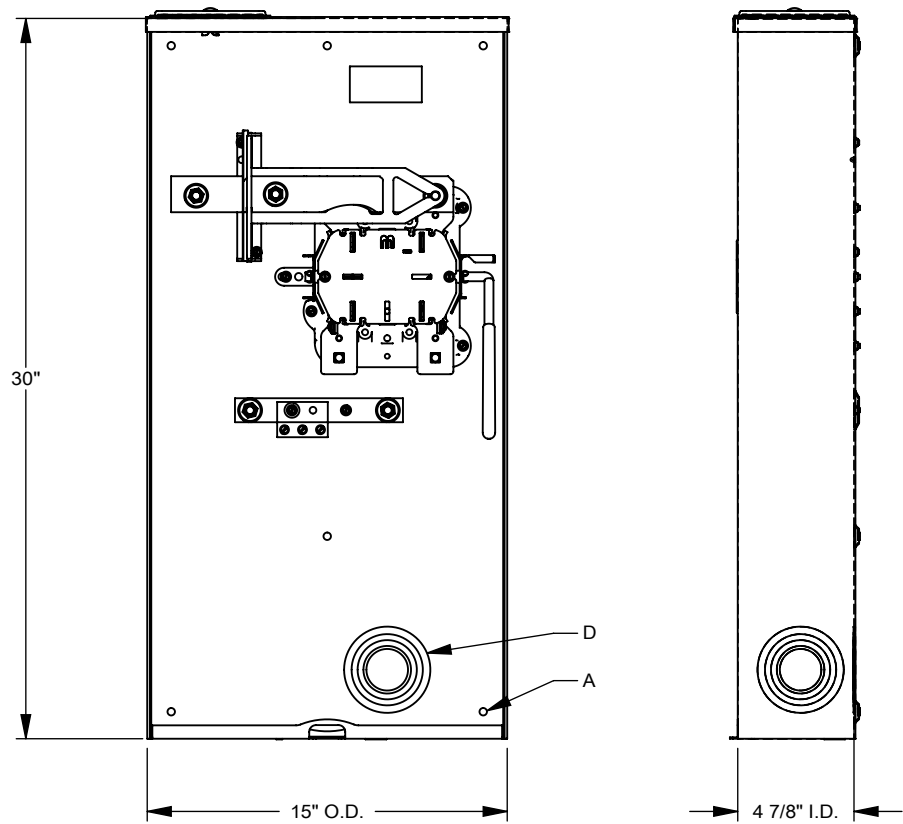

Version:

1

All dimensions are +/- 1/16".
 Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.