



Catalog Number: U4373-XT-5T9
Item Description: 200A 5T RL OU HD LVR 3P
UPC Code: 784572263260

Brand Name: Milbank
Type: Ringless Meter Socket
Application: Meter Socket With Main
Standard: UL Listed
Voltage Rating: Up to 240 Volts Alternating Current
Amperage Rating: 200 Ampere Continuous
Phase: 1 Phase
Frequency Rating: 60 Hertz
Cable Entry: Overhead and Underground
Terminal: 3/8 Inch Stud Line Side and Single Mechanical Load Side
Mounting: Surface Mount
Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish





Additional Specifications:

- AIC or SCCR Rating: Please Contact Factory
- Optional Line Side Lug Kits: K1539, K1350, K1540, K1541
- Optional Load Side Lug Kits: K1539, K1350, K1540, K1541
- Optional 5th Terminal Position: 9 O'Clock
- Maximum Amperage: 200 Maximum Ampere
- Number of Jaws: 5 Terminal
- Hub Opening and Closing Plates: Twin Large Closing Plates
- Bypass Provision: Lever Bypass
- Number Positions: 3 Positions

Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	2	QUICK MNTG. EMBOSS
B	2	TRANS. MNTG.EMBOSS
C	1	¼, ½ CONC. K.O.
D	3	1, 1¼, 1½, 2 CONC. K.O.
E	2	2, 2½, 3 CONC. K.O.

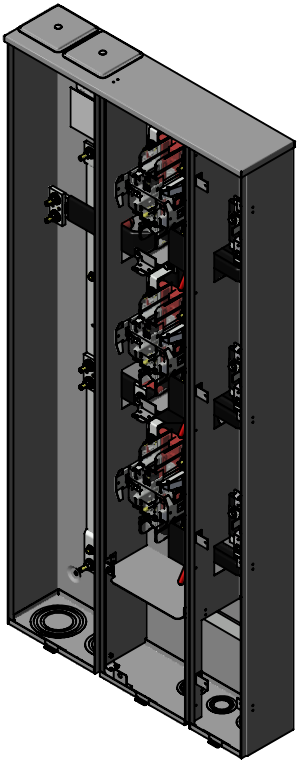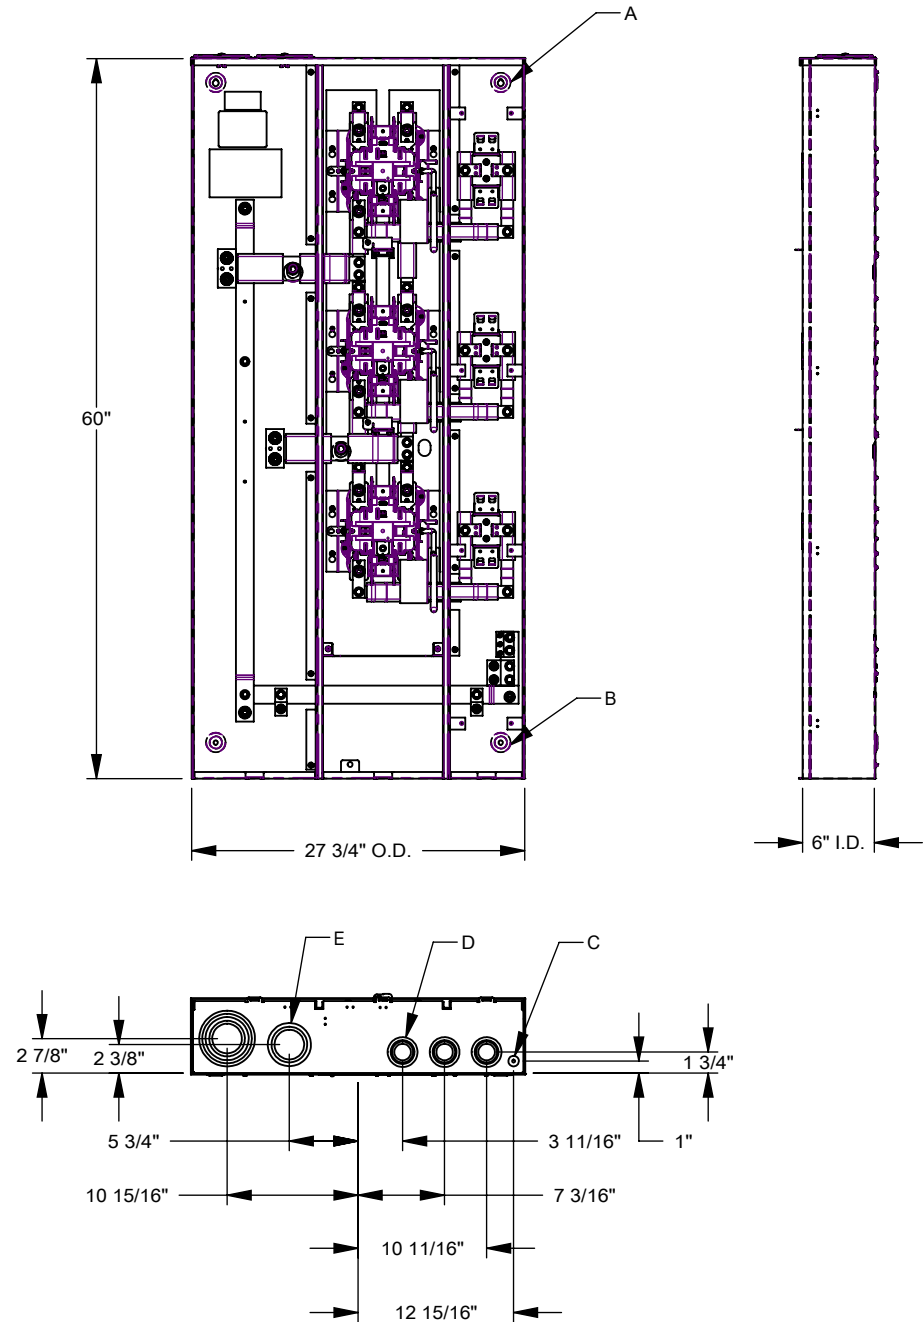

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.
Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.