





Catalog Number: U4376-Xt-5T9  
Item Description: 200A 5T RL OU HD LVR 6P  
UPC Code: 784572263239

Brand Name: Milbank  
Type: Ringless Meter Socket  
Application: Meter Socket With Main  
Standard: UL Listed  
Voltage Rating: Up to 240 Volts Alternating Current  
Amperage Rating: 200 Ampere Continuous  
Phase: 1 Phase  
Frequency Rating: 60 Hertz  
Cable Entry: Overhead and Underground  
Terminal: 3/8 Inch Stud Line Side and Single Mechanical Load Side  
Mounting: Surface Mount  
Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish




Additional Specifications: AIC or SCCR Rating: Please Contact Factory  
Optional Line Side Lug Kits: K1539, K1350, K1540, K1541  
Optional Load Side Lug Kits: K1539, K1350, K1540, K1541  
Optional 5th Terminal Position: 9 O'Clock  
Maximum Amperage: 200 Maximum Ampere  
Number of Jaws: 5 Terminal  
Hub Opening and Closing Plates: Twin Large Closing Plates  
Bypass Provision: Lever Bypass  
Number Positions: 6 Positions

*Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.*

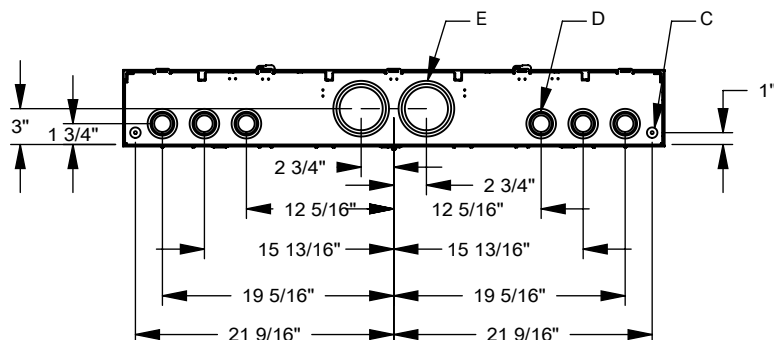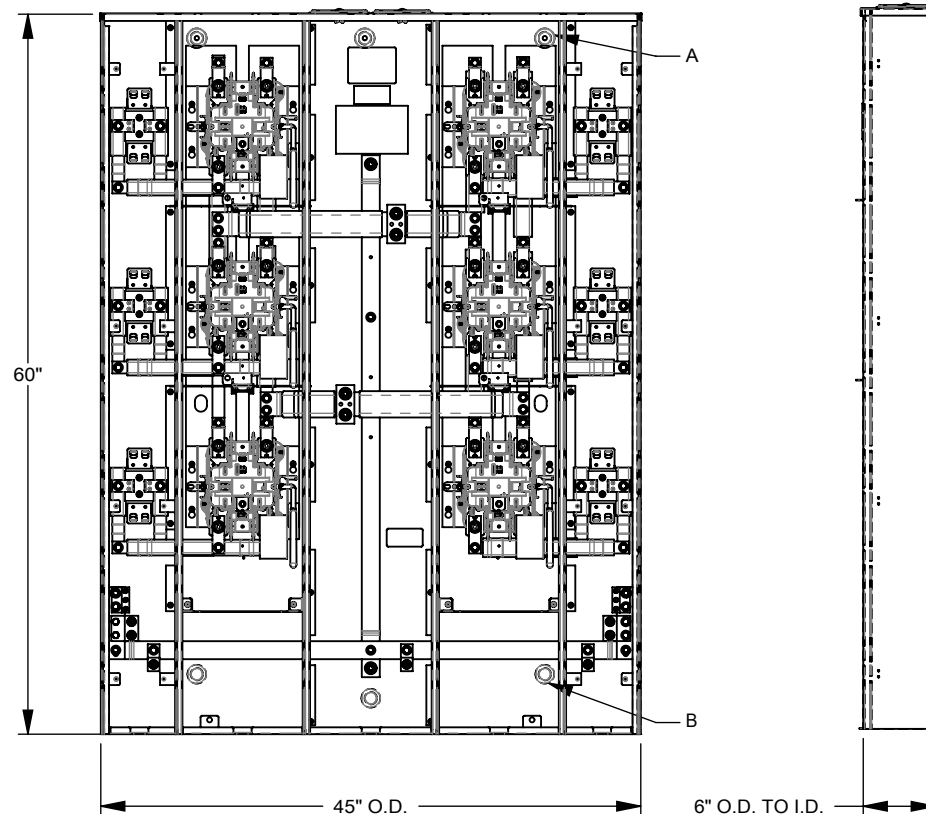

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	3	QUICK MNTG. EMBOSS
B	3	TRANS. MNTG.EMBOSS
C	2	1/4, 1/2 CONC. K.O.
D	6	1, 1 1/4, 1 1/2, 2 CONC. K.O.
E	2	2, 2 1/2, 3, 3 1/2, 4 CONC. K.O.

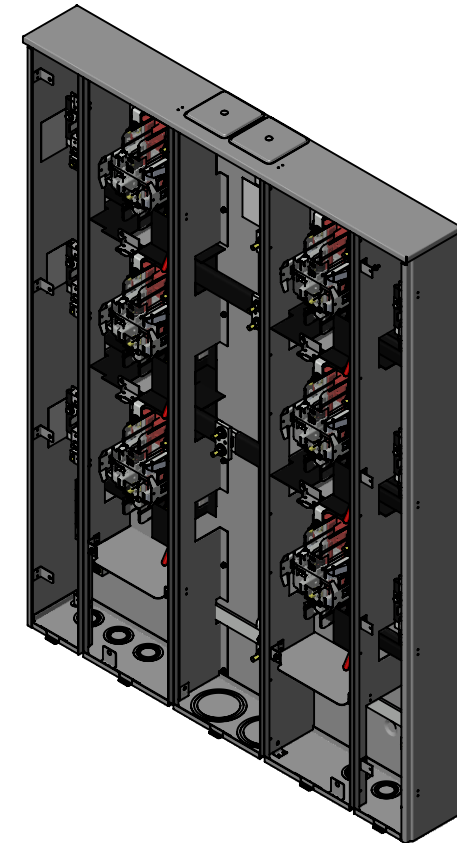

Version:

1

All dimensions are +/- 1/16".  
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.