



Multi-Position Sockets


100 Amp | 4 & 5 Terminals | Ringless | 300 VAC

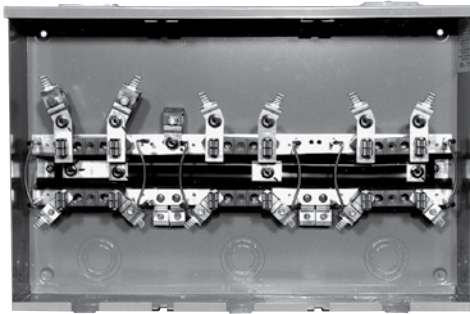


U7363-RL-KK




7362




7363

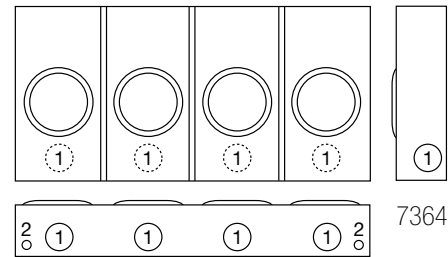

7364

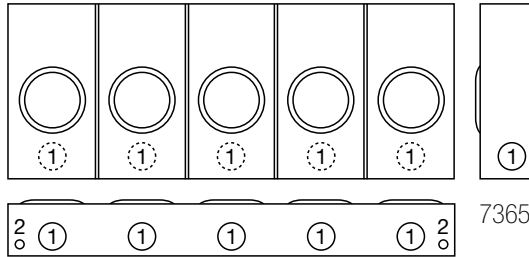

7365

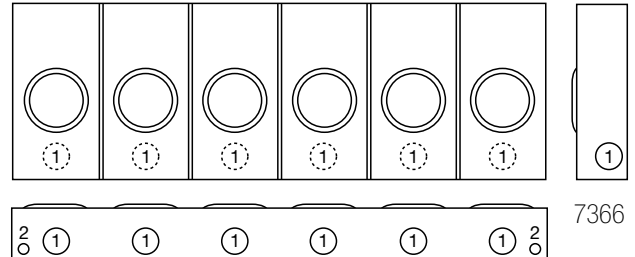

7366

Alliant Approved – 100 Amp/Position – Multi-Position – Horn Bypass – Ringless

Catalog Number	Positions	Service	Terminals	Hub	Connectors CU/AL		Dimensions			Knockouts	
					Line	Load	D"	W"	H"	1	2
U7362-RL-KK	2	OH	4	H.O.	#6-350	#6-2/0	4½	16 ⁵ / ₁₆	16	2½	¼, ½
U7362-RL-KK-5T9	2	OH	5	H.O.	#6-350	#6-2/0	4½	16 ⁵ / ₁₆	16	2½	¼, ½
U7363-RL-KK	3	OH	4	H.O.	#6-350	#6-2/0	4½	24½	16	2½	¼, ½
U7364-RL-KK	4	OH	4	H.O.	#6-350	#6-2/0	4½	32 ¹ / ₁₆	16	2½	¼, ½
U7365-RL-KK	5	OH	4	H.O.	#6-350	#6-2/0	4½	40 ⁷ / ₈	16	2½	¼, ½
U7366-RL-KK	6	OH	4	H.O.	#6-350	#6-2/0	4½	49 ⁹ / ₁₆	16	2½	¼, ½

Notes

- **Hub:** For proper hub selection refer to the hub suffix chart on the accessory page. A hub opening is supplied at each end and the extra opening is closed with a closing plate as standard.
- **Connectors:** Extruded aluminum connectors are tin plated.

