

Catalog Number: UAP5024-XL

Item Description: 200A 4T RL OU LOAD CENTER

784572316164

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket With Load Center

**UPC Code:** 

Standard: UL Listed

**Voltage Rating:** Up to 240 Volts Alternating Current

Amperage Rating: 200 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 12

Cutout Size: Breaker Provision

Cable Entry: Overhead and Underground

Terminal: Lay in Line Side and Single Mechanical

Load Side

Mounting: Surface Mount

**Enclosure:** Type 3R, Aluminum with Powder Coat

Finish

Additional Specifications: Number of Jaws:4 Terminal


Hub Opening and Closing Plates:Small Closing Plate


Hub Opening and Closing Plates: Small Closing Plate




<del></del>	<b></b>		
	o	0	о A
24"			

— 14 1/8" O.D. —



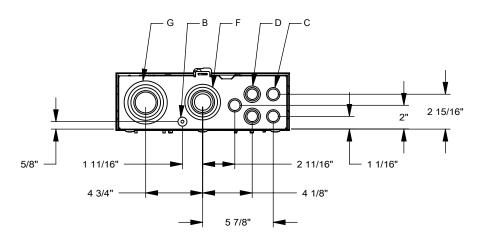

FEATURE TABLE				
ITEM	QTY	DESCRIPTION		
Α	6	U/L MNTG.EMBOSS		
В	2	14, 1/2 CONC. K.O.		
С	3	½, ¾ CONC. K.O.		
D	2	½, ¾, 1 CONC. K.O.		
Е	3	1, 1¼, 1½, 2 CONC. K.O.		
F	1	1, 1¼, 1½, 2, 2½ CONC. K.O.		
G	1	1¼, 1½, 2, 2½, 3 CONC. K.O.		

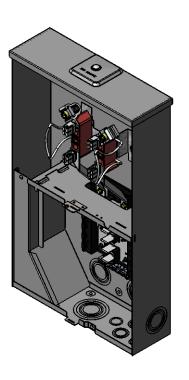



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

1

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.