


Cable entry grommet, type KDT/xE







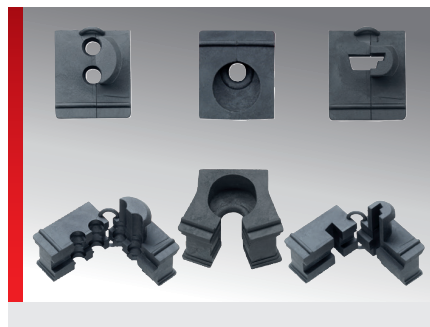





PRODUCT INFORMATION

The KDT/xE cable entry grommet can be used in conjunction with the KDL/E cable entry systems, e.g. to easily route pre-assembled cables into and through control cabinets. The grommet is 2-pce. and is positioned around the cable. The grommets are equipped with catch hooks that anchor

themselves in the KDL/E when positioning. Strain relief for type KDT/ZE is achieved using a simple cable tie. Type KDT/VE is a vario grommet without strain relief which covers a larger clamping range.

SPECIFICATIONS

	Thermoplastic rubber				
	-40 – 80 °C				
	HB				
					
					

Type	Order No.	Colour	for Ø mm	For opening small / large	No. of openings	Pack qty.
Multi-line grommet						
KDT/ZE 2x8 double grommet ¹⁾	87121291	Black	8	• / -	2	10
¹⁾ no UR-approval / unused openings can be closed off with Type VST sealing plugs						

Suitable for

MATERIAL PROPERTIES

 Thermoplastic rubber

 **Temperature / temperature range**
-40 – 80 °C

FIRE BEHAVIOUR

 **Fire classification**
HB

APPROVALS AND OPERATING PERMITS

 **CSA approval**

 **GL approval**

 **UR approval**

Cable entry grommet, type KDT/xE

TECHNICAL INFORMATION

 **LABS free**

 **UV-resistant**

CONFORMITY

 **RoHS (EC Directive 2002/95/EC)**

GENERAL INFORMATION

 **Made in Germany**

All details given in our sales material prospectuses and catalogues as well as the information available online are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • prvlD_57470~20170611~890287~87121291