

PAL MULTIMEDIA CART

TCPUL23 TCPUL23FF TCP23 TCP23FF



PARTS LIST

Qty	Part#	Description
1	022-2882	Cart Handle
1	TCPE10	12 Outlet Power Strip ("FF" Models Only)
1	TCDPT	Data Pass Through Plate (Optional Accessory)


HARDWARE LIST

Ref	Qty	Part#	Description
AA	2	030-0307	5/16-18 x 5/8" Hex Hd Screws
BB	2	030-0411	5/16-18 Serrated Nuts
CC	4	030-0915	10-32MT x 3/8" Self Tapping Screws ("FF" Models Only)
DD	2	030-0024	#6-32 Hex Nuts
EE	2	030-0312	#6-32 x 1/4" Phillips Truss Head Screws


INSTALL TOP SHELF HANDLE



STEP 1: Pull out laptop shelf.

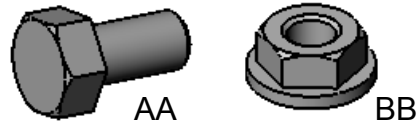

STEP 2: Attach handle with screws (AA) and nuts (BB).


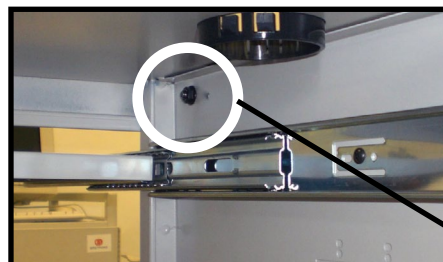


Secure nuts through interior of cart.



INSTALL OPTIONAL TCPE10 12-OUTLET POWER STRIP

Included on "FF" Models

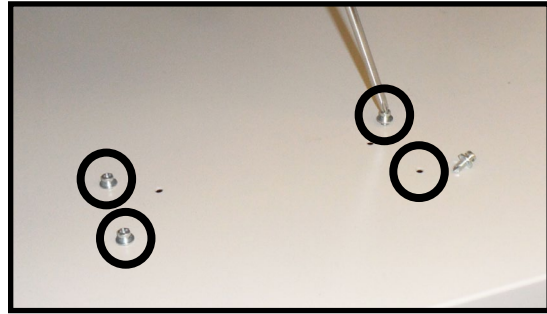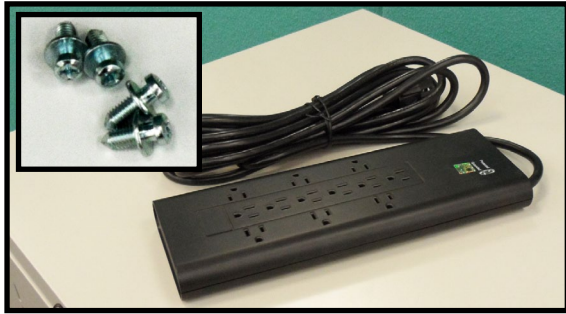


STEP 1: Install screws (CC) into bottom shelf.

STEP 2: Remove the power strip from the steel plate by moving it sideways until it unsnaps.



STEP 3: Using the slot cutout on the back of the power strip, slide and snap power strip onto installed screws toward the grommet hole on the side wall. **NOTE:** Your power cord should be on the same side as the grommet hole as shown above.

INSTALL COVER PLATE OR OPTIONAL TCDPT DATA PASS THROUGH PLATE

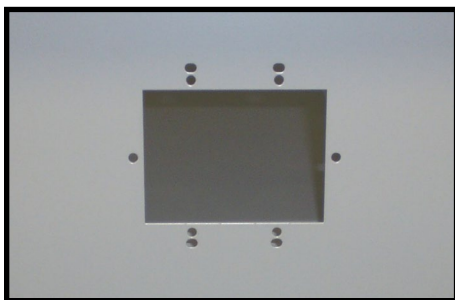

STEP 1: Using the hardware provided install the cover plate under the handle.




STEP 2: Using the hardware provided with the Data Pass Through Plate, install the TCDPT to the side panel.

OPTIONAL LAPTOP TRAY SETTING

The laptop shelf may be inverted for use as a tray, this will provide additional room to store a laptop inside PAL for short periods of time. Due to heat generated by the computer, it is not recommended that you leave your laptop on or charge the battery in the tray for more than one hour when it is secured inside the cart.



STEP 1: With the laptop shelf fully extended release the tabs by pressing the left tab down and the right tab up and flip the shelf over for the traysetting.

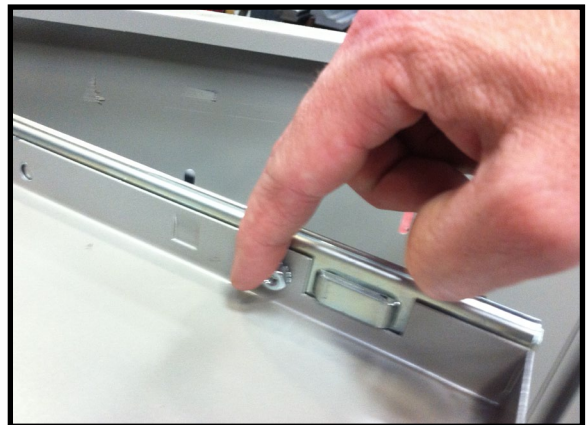

STEP 2: Realign the tray with the slides in the fully extended position, making sure that the tray slide fits inside the extended slide. Slowly push the tray all the way back into the cart to re-lock the tabs. Carefully extend the shelf once again. Install screw (EE) and nut (DD) into the hole near the front of the shelf as shown. This will lock the shelf in place from the weight of the laptop.

Bretford®
11000 Seymour Avenue
Franklin Park, IL 60131
TEL: 847.678.2545
800.521.9614
FAX: 847.678.0852
800.343.1779

Bretford Ltd.
2 Etongate
110 Windsor Road, Slough
Berkshire SL1 2JA England
TEL: 011 44 17 5353 9955
FAX: 011 44 17 5353 9478

www.bretford.com

Part # 031-8158
Rev. 06.10.14 CG

3 of 3