Professional Digital Multimeter Models CA5205, CA5210, CA5220, CA5230 & CA5240



The AEMC® Instruments CA5000 Series are designed for the daily needs of professional electricians. For the safety of the user, these multimeters meet the most demanding international standards: double insulation in accordance with EN 61010-1-III-2, 600V, Cat. III.

These tough, reliable and economical Digital Multimeters (DMMs) feature a large backlit display, clear push-button

functions, large rotary range selector and dedicated push buttons. The compact, hand-held size along with the rugged, shockproof rubber holster makes this unit ideal for toolboxes and pockets.

Model CA5205 has a 2000-count display that is average sensing and provides 1% accuracy of Reading. Models CA5210, CA5220 and CA5230 have a 4000-count display are average

sensing and provide 1% accuracy (Models CA5210 and CA5220), and 0.25% accuracy (Model CA5230) of Reading.

All models include a rugged, shockproof, protective, blue holster with Multistand™ (for lead and probe storage), test leads, 9V Alkaline battery and a user manual.




Features

- Tough, reliable, economical, professional DMMs in choice of 2000-, 4000- and 40,000-count models
- Automatic AC/DC selection (Model CA5205)
- Large backlit LCD (model dependent)
- · Clear pushbutton functions
- Large rotary range selector and dedicated push buttons
- Safety rated to EN 61010, 600V Cat. III for protection against spikes and over-voltage

- Accurate average sensing or TRMS models for your linear loads and distorted signals
- Complete line of accessories including leads and industry's largest selection of current probes
- Includes rugged, shockproof, protective, dirt resistant gray holster with Multistand™ (for lead and probe storage) and test leads
- · Three year warranty

Applications

- Installation, repair or maintenance of industrial equipment
- · Electrical field testing
- Troubleshooting failures and poor performance

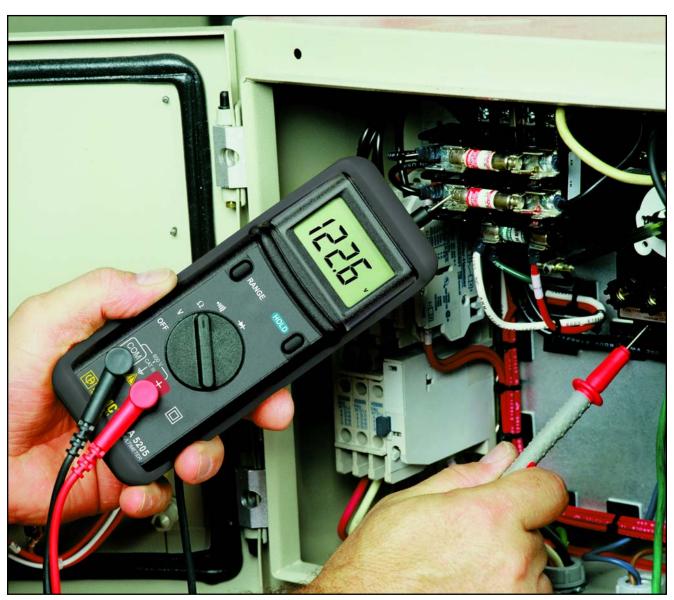

Model CA5205 measuring resistance in a relay cabinet.




Specifications

| AC VOLTAGE Measurement Range¹¹¹ 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 400mV to 600V 400mV to 1V 0.1mV to 10MΩ | 3 Ranges: 40mA to 10A 1μA to 1mA 1% of Reading ± 5cts 5 Ranges: 400mV to 600V 10μV to 100mV 6 of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA 6 of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV 7 of Reading ± 3cts |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range(1) | 40mA to 10A 1μA to 1mA 3% of Reading ± 5cts 5 Ranges: 400mV to 600V 10μV to 100mV 6 of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Basic Accuracy* - - ±1.5% of Reading ± 2cts ±0.8% of Reading ± 4cts ±0.9% | 5 Ranges: 400mV to 600V 10μV to 100mV 6 of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA 6 of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Basic Accuracy* - - ±1.5% of Reading ± 2cts ±0.8% of Reading ± 4cts ±0.9% | 5 Ranges: 400mV to 600V 10μV to 100mV 6 of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA 6 of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| AC VOLTAGE Measurement Range(n) 5 Ranges: 200mV to 600V 5 Ranges: 400mV to 600V 6 Rading ± 1ct ± 1.5% of Reading ± 1ct ± 0.5% of Reading ± 1ct ± 0.1% of Reading ± 1ct ± 0.5% of Reading ± 1ct ± 0.5% of Reading ± 1ct < | 5 Ranges: 400mV to 600V 10μV to 100mV % of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Range(1) 200mV to 600V 400mV to 1V 0.1mV to 10MΩ 10M | 400mV to 600V 10μV to 100mV % of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Range(1) 200mV to 600V 400mV to 1V 0.1mV to 10MΩ 10M | 400mV to 600V 10μV to 100mV % of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Basic Accuracy* $\pm 1\%$ of Reading ± 5 cts $\pm 1.5\%$ of Reading ± 1 ct $\pm 1.5\%$ of Reading ± 1 ct $\pm 1\%$ of Reading ± 3 cts $\pm 1.5\%$ of | % of Reading ± 20cts 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Input Impedance Imput Im | 3MΩ 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Measurement Range(n) AumA to 10A AumA to 10A AumA to 10A | 3 Ranges: 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Measurement Range(n) AumA to 10A AumA to 10A AumA to 10A | 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Measurement Range Page | 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Range ⁽¹⁾ 40mA to 10A 40mA to 10A 40mA to 10A Resolution - - 10μ A to 10mA 10μ A to 10mA Basic Accuracy* - - ±1.5% of Reading ± 2cts ±1.2% of Reading ± 5cts ±0.5% DC VOLTAGE Measurement Range ⁽¹⁾ 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 400mV to 600V 400mV to 600V <td>40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV</td> | 40mA to 10A 1μA to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μV to 100mV |
| Resolution - - 10μ A to 10mA 10μ A to 10mA 10μ A to 10mA Basic Accuracy* - - ±1.5% of Reading ± 2cts ±1.2% of Reading ± 5cts ±0.5% DC VOLTAGE Weasurement 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 400mV to 600V 400mV to 1V 0.1mV to 1V 0.25% of Reading ± 1ct ±0.25% of Reading ± 1ct ±0.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% 40.1% </th <td>1μ A to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μ V to 100mV</td> | 1μ A to 1mA % of Reading ± 10cts 5 Ranges: 400mV to 600V 10μ V to 100mV |
| Basic Accuracy* - ±1.5% of Reading ± 2cts ±1.2% of Reading ± 5cts ±0.5% DC VOLTAGE Weasurement 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 400mV to 600V 400mV to 1V 0.1mV to 1V <td>% of Reading ± 10cts 5 Ranges: 400mV to 600V 10µV to 100mV</td> | % of Reading ± 10cts 5 Ranges: 400mV to 600V 10µV to 100mV |
| DC VOLTAGE Measurement 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 400mV to 600V 400mV to 1V 0.1mV to 1V | 5 Ranges: 400mV to 600V 10μV to 100mV |
| Measurement Range ⁽¹⁾ 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 5 Ranges: 400mV to 600V 400mV to 1V 0.1mV to 1V | 400mV to 600V 10μ V to 100mV |
| Range(1) 200mV to 600V 400mV to 1V 2002 to 20MΩ 2002 to 40MΩ 10mV to 1V 2002 to 40MΩ 400Ω to 40MΩ | 400mV to 600V 10μ V to 100mV |
| Resolution 0.1mV to 1V 0.1mV to 1V 0.1mV to 1V 0.1mV to 1V 0.1mV to 1VBasic Accuracy* $\pm 1\%$ of Reading $\pm 1 \text{ct}$ $\pm 1\%$ of Reading $\pm 1 \text{ct}$ $\pm 1\%$ of Reading $\pm 1 \text{ct}$ $\pm 0.25\%$ of Reading $\pm 1 \text{ct}$ $\pm 0.1\%$ Input Impedance(2) $3 \text{M} \Omega$ $10 \text{M} \Omega$ $10 \text{M} \Omega$ $10 \text{M} \Omega$ RESISTANCEMeasurement Range6 Ranges: 200Ω to $20 \text{M} \Omega$ 6 Ranges: 400Ω to $40 \text{M} \Omega$ 6 Ranges: 400Ω to $40 \text{M} \Omega$ 6 Ranges: 400Ω to $40 \text{M} \Omega$ | 10μV to 100mV |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | · · |
| Input Impedance (2) $3MΩ$ $10MΩ$ $10MΩ$ $10MΩ$ RESISTANCE Measurement Range 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 400Ω to 40MΩ 400Ω to 40MΩ 400Ω to 40MΩ | |
| RESISTANCE Measurement Range 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 400Ω to 40MΩ | 3MΩ |
| Measurement Range 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 6 Ranges: 400Ω to 40MΩ 400Ω to 40MΩ 400Ω to 40MΩ 400Ω to 40MΩ | DIVIZZ |
| Range 200Ω to 20MΩ 400Ω to 40MΩ 400Ω to 40MΩ 400Ω to 40MΩ | 0 D |
| | 6 Ranges: 400Ω to $40M\Omega$ |
| LUCSUIULUII U.182 IU TURSE | 0.1Ω to 10kΩ |
| | |
| Basic Accuracy* ±1.5% of Reading ± 5cts ±1.5% of Reading ± 3cts ±1.5% of Reading ± 3cts ±0.5% of Reading ± 3cts ±0.5% of Reading ± 3cts ±0.26 CONTINUITY | 2% of Reading ± 3cts |
| | 400 |
| Beeper Activation $\leq 700\Omega$ $\leq 40\Omega$ $< 40\Omega$ | <40Ω |
| DIODE TEST Page lating Any | 41/ |
| Resolution 1mV 1mV 1mV | 1mV |
| | of Reading ± 10cts |
| CAPACITANCE | |
| Range | anges: 4nF to 40µF |
| Basic Accuracy* - $\pm 5\%$ of Reading ± 10 cts $\pm 5\%$ of Reading ± 10 cts $\pm 1.5\%$ of Reading ± 4 cts $\pm 1.5\%$ | % of Reading ± 5cts |
| FREQUENCY | |
| Measurement - - 5 Ranges: 5 Ranges: Range 10Hz to 400kHz 100Hz to 400kHz 1 | 5 Ranges: 100Hz to 400kHz |
| Basic Accuracy* - ±0.1% of Reading ± 2cts ±0.1% of Reading ± 20cts ±0.1% | % of Reading ± 10cts |
| GENERAL | |
| Digital Display 2000-count 4000-count 4000-count 4000-count | 40,000-count |
| Analog Bargraph - 40-segment 40-segment 40-segment | 40-segment |
| Power Source Two AA Alkaline batteries 1.5V Alkaline 9V ba | |
| Dimensions 7.0 x 2.5 x 1.7" (177 x 64 x 42mm) | ano. y |
| Weight 0.7 lb (350g) | |
| ENVIRONMENTAL 0.7 ib (0.50g) | |
| Operating COS + 4000F (400 + 2000) | |
| Temperature 32° to 122°F (-10° to 60°C) | |
| Storage Temperature -4° to 140°F (-40° to 70°C) | |
| SAFETY | |
| | |
| B. LI | |
| Double Insulation Yes | |
| CE Mark Yes | |

- (1) Use on frequency: 0 to 60Hz
 (2) For the CA5210/CA5220, on position V elec: base impedance 270kΩ
 (3) Automatic recognition of DC or AC
 (4) Additional function "ADP": input 0 to 400mVpc for accessories
 * Accuracy dependent on range



Construction

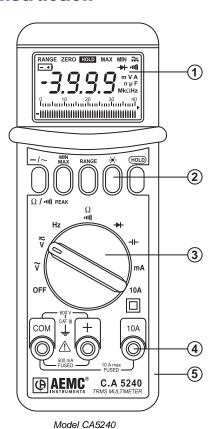

- 1. LCD display
- 2. Control buttons
- 3. Rotary range selector switch
- 4. Safety terminals (4mm)
- 5. Shockproof rubber holster



Test Leads included with CA5000 Series

| ORDERING INFORMATION | CATALOG NO. |
|-------------------------------------------------------------|---------------|
| DMM Model CA5205 (2000-count, Average Sensing, 1% Accuracy) | Cat. #2116.73 |
| DMM Model CA5210 (4000-count, Average Sensing, 1% Accuracy) | Cat. #2116.74 |
| DMM Model CA5220 (4000-count, Average Sensing, 1% Accuracy) | Cat. #2116.75 |
| DMM Model CA5230 (4000-count, TRMS, 0.25% Accuracy) | Cat. #2116.76 |
| DMM Model CA5240 (40,000-count, TRMS, 0.1% Accuracy) | Cat. #2116.77 |





Contact Us

United States & Canada:

Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments 200 Foxborough Blvd. Foxborough, MA 02035 USA (508) 698-2115 • Fax (508) 698-2118 www.aemc.com

Customer Support – for placing an order, obtaining price & delivery:

customerservice@aemc.com

Sales Department – for general sales information:

sales@aemc.com

Repair and Calibration Service – for information on repair & calibration, obtaining a user manual: repair@aemc.com

repair @acmo.com

Technical and Product Application Support – for technical and application support:

techinfo@aemc.com

Webmaster – for information regarding www.aemc.com:

webmaster@aemc.com

South America, Central America, Mexico, Caribbean, Australia & New Zealand:

Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments 15 Faraday Drive Dover, NH 03820 USA (978) 526-7667 • Fax (978) 526-7605 export@aemc.com www.aemc.com

All other countries:

Chauvin Arnoux SCA
190, rue Championnet
75876 Paris Cedex 18, France
33 1 44 85 45 28 • Fax 33 1 46 27 73 89
info@chauvin-arnoux.com
www.chauvin-arnoux.com

