DC/AC MicroProbe Model K100



The Model K100 has exceptional AC/DC current measurement capabilities. Very small and compact, this microprobe is designed for accurate measurement of very low currents with 50µADC sensitivity.

Its very small size and "clip" shape make it ideal for probing and measuring in tight wiring areas such as circuit boards, 4 to 20mA process loops or automotive electronic circuitry. Model K100 is an excellent companion to all DMMs and instruments that will benefit from the probe's high sensitivity, dynamic range and waveform displaying characteristics.

The Model K100 provides a 1mV/mA output and is designed for versatility and general low current applications. It provides AC + DC output signal proportional to the total current under test, without the need of probe ranging or signal filtering. True RMS measurements with total AC + DC components are possible.

Features

- Measures extremely low level DC from 100µA
- Outputs signal proportional to total current (AC + DC)
- Low noise
- Ultra-compact size and non-contact clamp-on convenience
- · Simple plug-in operation
- Designed for use with DMMs and oscilloscopes
- Accurate display of wave forms
- No range or mode (AD/DC) switching required
- · Extended battery life
- Red LED indicates momentary or continuous overload
- Green LED indicates power and battery condition
- CE Mark

Applications

- Industrial process controls (4 to 20mA current loops)
- Electronic circuit design, testing and repair
- Automobile wiring and engine control systems
- Avionics systems maintenance and repair
- Shipboard maintenance and repair
- Fault and signal location in complex networks
- Ground and leakage current measurement
- Pre-deployment testing of powerconscious equipment




Specifications

MODELS	K100
ELECTRICAL	
Nominal Range	0 to 3Arms/0 to 4.5Abc
Measurement Range	0 to ±4.5A
Output Signal	<100µV, DC to 3kHz
Accuracy (4.5A Range)	0.00/ . []
AC _	±2.0% of Reading ± 200µA
DC	±1% of Reading ± 200μA
Overload	Red LED indicates momentary or continuous overload
Frequency Range	DC to 2kHz (@ -3dB sine)
Load Impedance	200Ω
Working/Common Mode Voltage	300V, EN 61010-1, Cat. II
Battery	9V Alkaline, NEDA 1604, 6LR61 or IEC 6 LF22 (Approx. 20 hours life)
Output Termination	4mm Safety Banana Jacks
MECHANICAL	
Operating Temperature	-14° to 131°F (-10° to 55°C)
Storage Temperature	-40° to 176°F (-40° to 80°C)
Operating Relative Humidity	<95% @ ≤ 35°C, 75% @ 55°C
Zero Adjustment	±25mA approx. by 10 turn knob at base of case
Maximum Conductor Size	3/16", 0.180" (4.5mm)
Dimensions	Probe: 4.4 x 0.6 x 1.0" (111 x 15 x 25mm); Electronic Module: 4.9 x 2.5 x 1.1" (124 x 64 x 28mm)
Weight	9 oz (250g)
SAFETY	
Electrical	EN 61010-2-32
CE Mark	Yes

Note: Reference conditions: 23°C \pm 3°C, 20 to 75%RH, battery voltage 9V \pm 0.1V; earth's magnetic field <40A/m; absence of AC fields; input impedance of display device \geq 1M Ω /100pF; DC or sinusoidal AC current 45 to 65Hz.



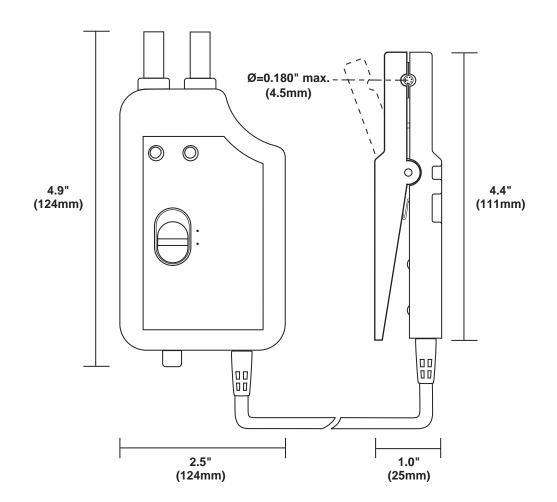



Shrouded Banana Plugs: Two 4mm safe-ty banana jacks; standard 3/4" (19mm) spacing

ORDERING INFORMATION

Includes a 9V battery and user manual



Contact Us

United States & Canada:

Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments 200 Foxborough Blvd. Foxborough, MA 02035 USA (508) 698-2115 • Fax (508) 698-2118 www.aemc.com

Customer Support – for placing an order, obtaining price & delivery:

customerservice@aemc.com

Sales Department – for general sales information:

sales@aemc.com

Repair and Calibration Service – for information on repair & calibration, obtaining a user manual:

repair@aemc.com

Technical and Product Application Support – for technical and application support:

techinfo@aemc.com

Webmaster – for information regarding www.aemc.com:

webmaster@aemc.com

South America, Central America, Mexico, Caribbean, Australia & New Zealand:

Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments 15 Faraday Drive Dover, NH 03820 USA (978) 526-7667 • Fax (978) 526-7605 export@aemc.com www.aemc.com

All other countries:

Chauvin Arnoux SCA 190, rue Championnet 75876 Paris Cedex 18. France 33 1 44 85 45 28 • Fax 33 1 46 27 73 89 info@chauvin-arnoux.com www.chauvin-arnoux.com

