

TT-1 / TT-2 Hardware List

BAG A

Qty	Description
2	Hex Cap Bolt 5/16 -18 x 1¼
4	Hex Cap Bolt, 5/16 – 18 x 1
12	SAE Washer, 5/16"
6	Hex Nut, 5/16 – 18


BAG B (metal tops)

Qty	Description
4	Socket Head, M6 x 25
4	Black SAE Washer ¼"
4	Hex Nut, M6 nut


BAG W (wood tops)

Qty	Description
4	Socket Head Cap Screw, M6 x 50
4	Black SAE Washer, ¼"
4	Hex Nut, M6


TT-1 and TT-2 Installation

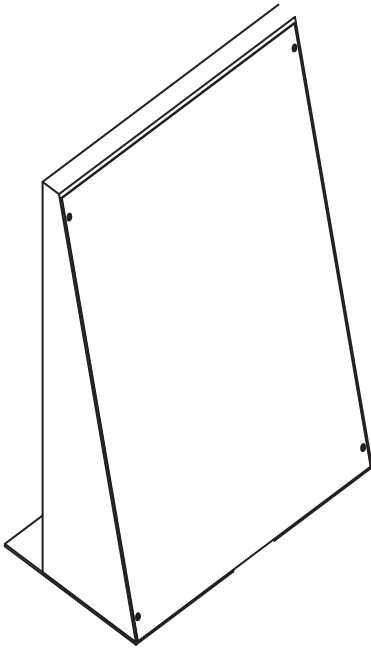


1. Remove rear cover from Table Top Mount

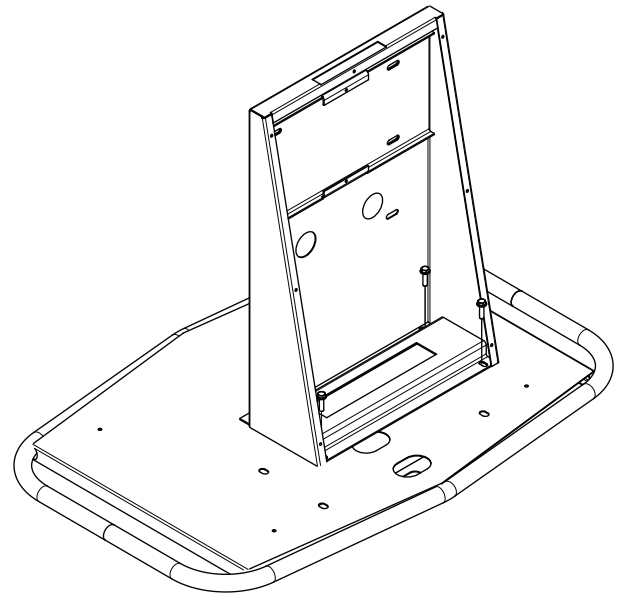

2. Using **Bag B** (metal top) or **Bag W** (wood top), secure table top mount to top


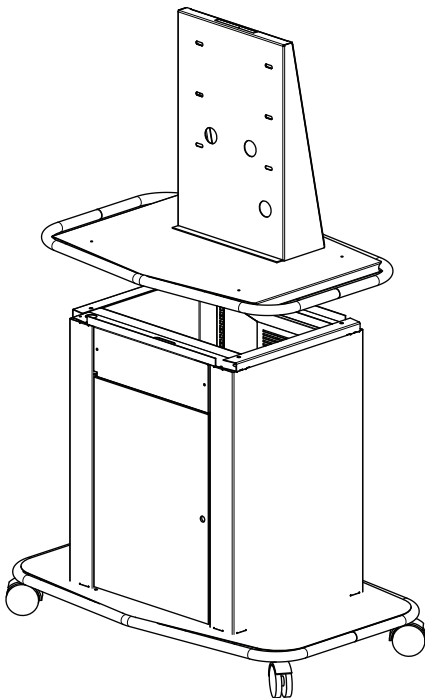


3. Using nuts provided, secure top to base of cart

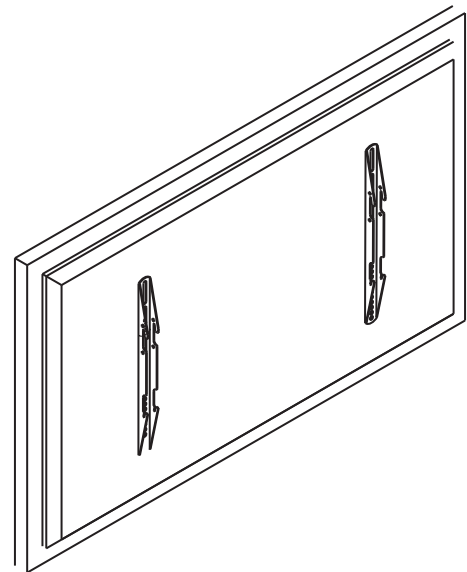


4. Using hardware provided, Bolt rear brackets to back of Plasma(s) or LCD(s) screen as vertically close to center of television as possible. **Use nylon spacers** provided to increase cable management space for routing cable into the table top mount.

TT-1 and TT-2 Installation

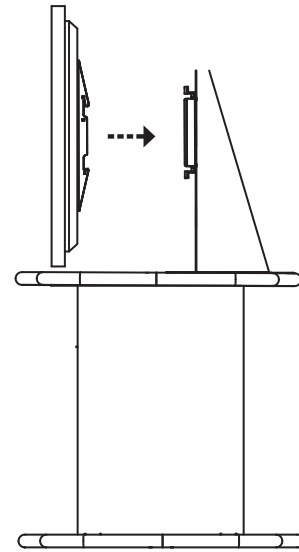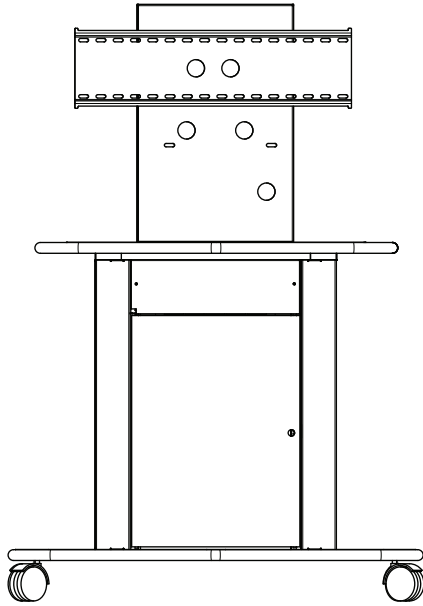


5. Using **Bag A**, Bolt the Flat Screen Mount to the Table Top Mount. For larger screens or screens with bottom mounted speakers you may need to raise the height.

6. Using brackets, hang Plasma(s) or LCD(s) on Flat Screen Mount.

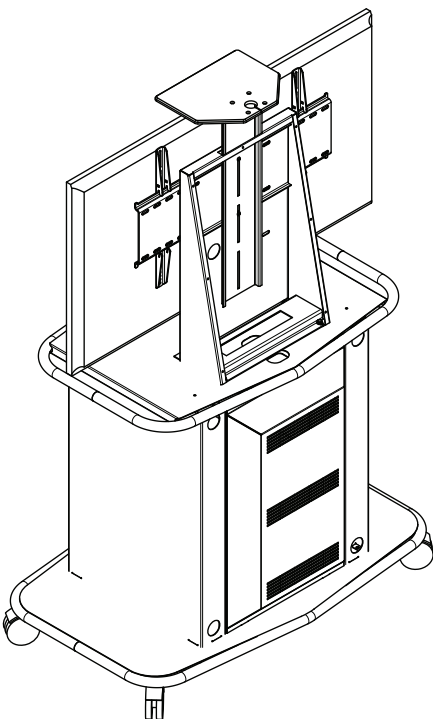


7. Attach acrylic platform to camera platform. Slide Camera Platform down through top slot to desired height. Using bolts provided, secure platform at desired height.

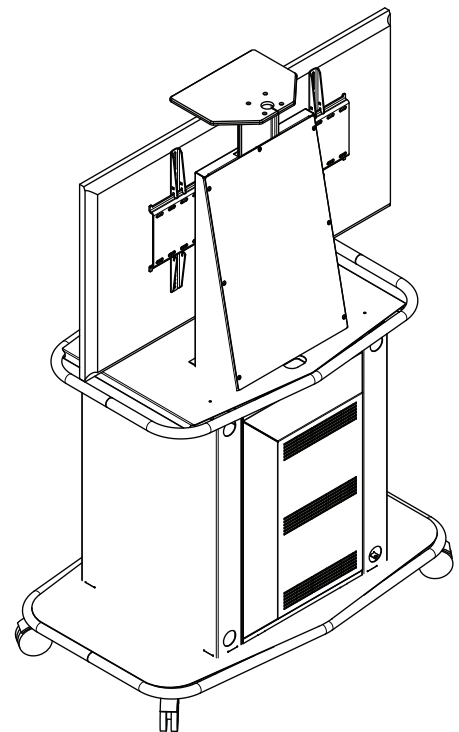

8. After routing all cables, replace back panel and secure with bolts provided.

TT-1 and TT-2 Installation

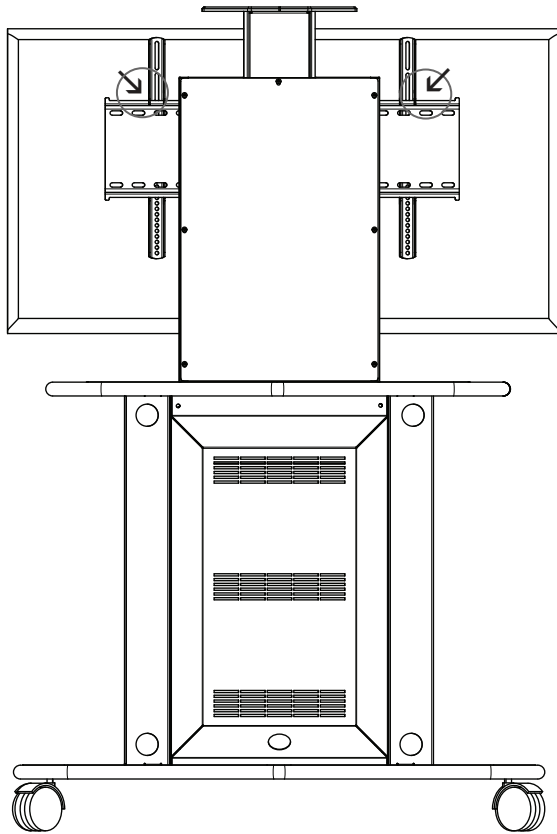

9. Place Slide Locks on each end of Flat Screen Mount next to the rear brackets. These keep the screen(s) centered on the Flat Screen Mount.