

Vertical D-Rings PATENTED

- Patented cable manager ring
- Standard EIA hole spacing allows product to be mounted to any standard rack
- Flexible material allows arm to rotate so entire cable bundle can be inserted and removed

- 1/4" mounting holes allow for a variety of screws to secure the D-ring to a surface
- Material: Black Polycarbonate




| Part Number | Part Description | Fiber | ScTP | UTP | Std. Pkg. Qty. | Std. Ctn. Qty. |
|----------------|--|-------|------|-----|----------------|----------------|
| CMVDR1 | Vertical D-ring. Outside dimensions 5.70"L x 2.00"W. | 252 | 48 | 96 | 1 | 10 |
| CMVDR1S | Vertical D-ring. Outside dimensions 3.30"L x 2.00"W. | 132 | 32 | 52 | 1 | 10 |
| CMVDR2 | Vertical D-ring. Outside dimensions 5.70"L x 3.00"W. | 504 | 96 | 192 | 1 | 10 |
| CMVDR2S | Vertical D-ring. Outside dimensions 3.30"L x 3.00"W. | 252 | 48 | 96 | 1 | 10 |
| CMVDRC | Center mounted vertical D-ring for routing cables between two adjacent racks. Requires 8.25" spacing between the center lines of the adjacent rack's mounting holes. Outside dimensions 5.60"L x 8.00"W. | 1000 | 200 | 400 | 1 | 10 |

All product color is black.

Tak-Ty® Hook & Loop Cable Tie Mounts

- For use with hook and loop cable ties, see page B1.87, B1.88
- Unique cradle design provides maximum stability for cable bundle
- For indoor use only

- Dimensions: 1.10"L x 1.12"W x 0.34"H (27.9mm x 28.4mm x 8.6mm)

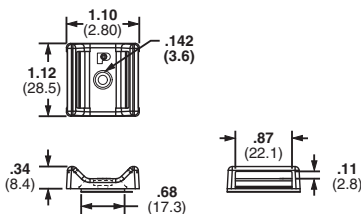

| Part Number | Used with Cable Ties‡ | Material | Color | Max. Static Load | | Mounting Method* | Std. Pkg. Qty. | Std. Ctn. Qty. | |
|--------------------|-----------------------------|-----------|---------------------------|------------------|-----|-------------------------------|----------------|----------------|------|
| | | | | Lbs. | g | | | | |
| ABMT-A-C | HLS, HLT, TTS, UCT | Nylon 6.6 | Natural | 0.38 | 174 | Pre-installed Rubber Adhesive | 100 | 1000 | |
| ABMT-A-C20 | | | Black | | | | | | |
| ABMT-S6-C | | | Natural | — | — | | #6 (M3) Screw | 100 | 1000 |
| ABMT-S6-C20 | | | Black | | | | | | |
| ABMT-S6-C60 | | Black | Flame Retardant Nylon 6.6 | Natural | 100 | 1000 | | | |
| ABMT-S6-C69 | | Natural | | | | | | | |

‡Cable tie cross section sizes: HLT = Tak-Ty™ Hook & Loop Ties, HLS = Tak-Ty™ Hook & Loop Strip Tie, TTS = Tak-Tape™ Roll, UCT = Ultra-Cinch™ Tie.

*For proper selection of adhesives see page B2.53.