

WingMAN 9000 Intercom Adaptor

ProLink/Wired Intercom Interface Specifications




WingMAN is an interface station that allows full duplex communication between ProLink wireless belt packs and unbalanced party-line intercom systems such as the Anchor Audio PortaCom.

The WingMAN includes a transceiver that is compatible with ProLink belt packs. An integrated

interface circuit makes it possible to interface

the transceiver with party-line intercom systems with ease.

The RX/TX LED glows solid when the Wireless Remote belt packs are out of range. The Remote belt packs must move closer to the WingMAN to operate.

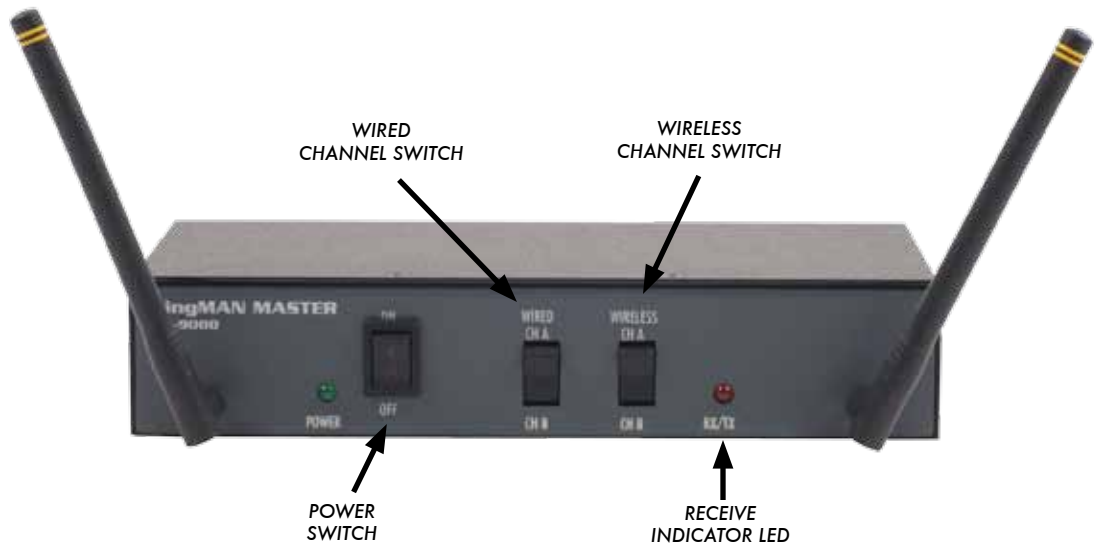

WIRED SYSTEM INTERFACE

WINGMAN COMPONENTS

- WM-9000 WingMAN Interface Station
- RM-9000 Rackmount Kit - WingMAN

WINGMAN FEATURES

2-YEAR WARRANTY!

EASE OF USE - SETUP IN LESS THEN 5 MINUTES

INTERFACES W/ PARTY LINE WIRED SYSTEMS

DUAL ANTENNAS PROVIDE EXCELLENT DUPLEX RANGE

RACKMOUNTABLE - KIT AVAILABLE

MADE IN THE USA!

WINGMAN TECHNICAL SPECIFICATIONS

Range (line of sight)	200' to 250'
FCC License	License Free
Selectable Wired Channels	2
Frequency	902 - 928 MHz
Interface Connector	3-pin female XLR
Antenna	1/2 wave length dipole
Antenna Length	4"
Dimensions	8.5 x 4.5 x 1.7 in / 21.6 x 11.4 x 4.32 cm
Weight	2.4lbs / 1.1kg
FCC ID:	J8ZWM-900



Anchor Audio, Inc.



205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com