

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



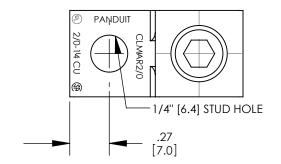

NOTES:

- 1. MATERIAL: BODY COPPER, TIN PLATED SCREW STEEL, ZINC PLATED
- 2. DIMENSIONS IN BRACKETS ARE MILLIMETERS
- 3. TOLERANCES ARE ± .02 [.5] UNLESS OTHERWISE NOTED
- 4. SLIGHT COPPER EXPOSURE IS PERMITTED WITHIN THE NON-CRITICAL INTERIOR THREAD AREA BUT NOT ON EXTERNAL SURFACE OR FUNCTIONAL TERMINATION AREAS.
- 5. SEE PACKAGE LABEL FOR TIGHTENING TORQUE INFORMATION
- 6. PKG QTY: -Q = 25
- 7. COMPATIBLE WITH PANDUIT UNIVERSAL GROUND BAR PART SERIES UGB2/0.

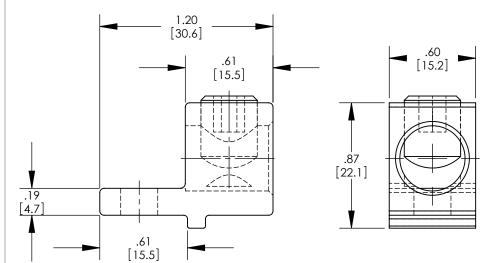



	WIRE RANGE	WIRE STRIP	HEX KEY	
PART NUMBER	COPPER	LENGTH		
CLMAR2/0-14-Q	14 AWG - 2/0 AWG	.61 [15.5]	3/16"	

							COPPER MECHANICAL ANTI-ROTATIONAL CONNECTOR (CLMAR2/0-14-Q) CUSTOMER DRAWING
							10J017CF/03
03	10/20	JHNU	JHNU	RGB	REVISED MARKING TEXT LOCATION	10J017CF-JC	DATASET FILE NAME 10J017CF-JC/03.SLDDRW
02	6/19	JHNU	JHNU	RGB	ADDED NOTE 4	10J017CF-JC	DIMENSIONAL TOLERANCES ARE: IN [mm]
01	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	10J017CF-JC	.X ± .XXX ± SEE NOTES .XX ± .02 [.5] ANGLES ±
00	4/12	JHNU	JHNU	RGB	DRAWING RELEASED	10J017CF-JC	THIRD ANGLE PROJECTION 10J017CF-JC
REV	DATE	BY	СНК	APR	DESCRIPTION	ECN	DRAWN BY DATE CHK SCALE NONE SHEET 1 OF 1 SIZE A