


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



Notes:

1. 600V max voltage rating
2. 257°F (125°C) max temperature rating of insulation material .
3. Stranded copper wire only
4. Material:
 - A. Stamping – brass, tin plated
 - B. Sleeve – copper or brass, tin plated.
 - C. Housing – Nylon type 6/6. Colors are translucent.
5. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
6. Dimensions in bracket are in mm Or mm²

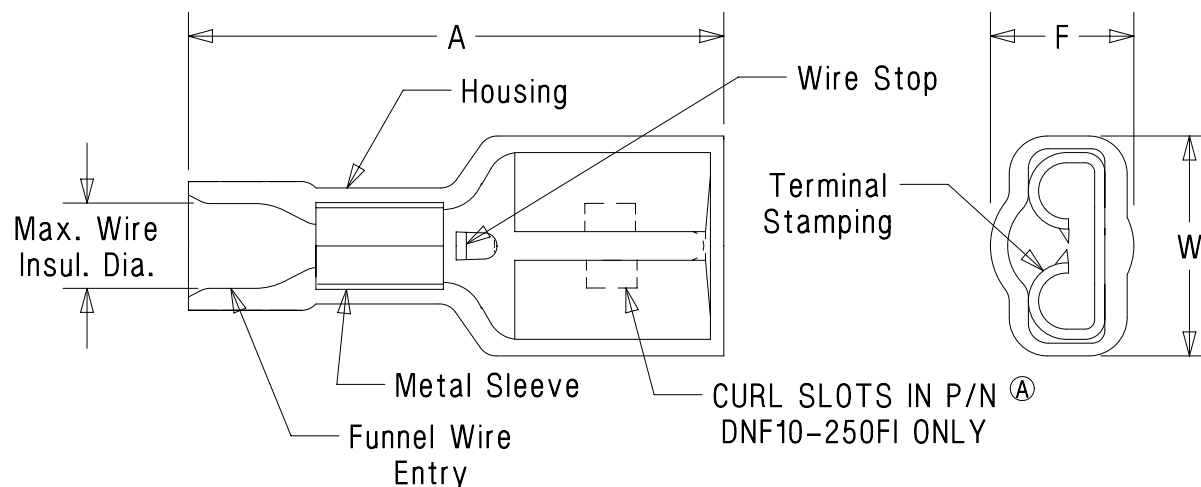

CERTIFIED
LR31212



LISTED
20H3
E78522

Base part number	Wire range AWG (mm ²)	Tab size	Housing color	A ± .03 (.8)	W ± .02 (.5)	Max. Insul.	F ± .02 (.5)	Wire Strip length +1/32, -0 (+0.8, -0)	Crimp tools
									CT-100A CT-600-A CT-1550 CT-1551 CT-2400 W/CT-2455 CRIMP HEAD CT-2500
DNF18-250FI	22-18 (0.5-1.0)	.250X.032 (6.3X.8)	Red	.94 (23.9)	.36 (9.1)	.14 (3.6)	.21 (5.3)	9/32 (7.1)	
DNF14-250FI	16-14 (1.5-2.5)	.250X.032 (6.3X.8)	Blue	.94 (23.9)	.36 (9.1)	.16 (4.1)	.24 (6.1)		
DNF10-250FI	12-10 (4.0-6.0)	.250X.032 (6.3X.8)	Yellow	.95 (24.1)	.36 (9.1)	.22 (5.6)	.27 (6.9)	3/8 (9.5)	CT-100, CT-100A, CT-460, CT-550 CT-600-A, CT-1551, CT-2500

							TITLE FULLY INSULATED (STD NYLON)- FEMALE DISCONNECTS - SLEEVED BARREL (LOOSE PIECE) CUSTOMER DRAWING					
							ITEM REVISION NAME N41672BA/07			PANDUIT		
							DATASET FILE NAME N41672BA/07					
07	10-17-18	BWG	SKB	JADE	Corrected DNF10-250FI Wire Strip length and updated Title Border.	041853/00	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± ANGLES ± THIRD ANGLE PROJECTION			MATERIAL: SEE NOTE #4		
06	8/11	SHOR			MODIFIED NOTE #5, ADDED INSTALLATION TOOLS							
04	1/10	LM			Removed hidden lines for clarity							
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY ES	DATE	CHK	SCALE NONE	SHT 1 OF 1	SIZE A