
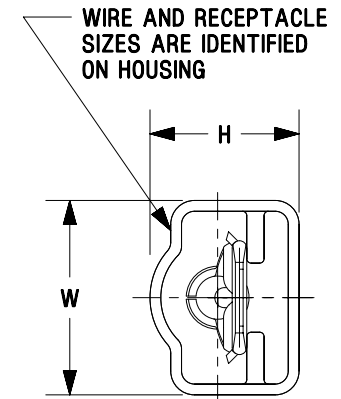


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE	WIRE RANGE		COLOR	MAX. WIRE INSULATION DIAMETER	DIMENSIONS in. [mm]			WIRE STRIP LENGTH	TOOL CHART
		ENGLISH	METRIC			L ± .03 [0,8]	W ± .02 [0,5]	H ± .02 [0,5]		
DNF18-250FIM	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.13 [3,4]	.90 [22,9]	.42 [10,7]	.27 [6,9]	9/32 ^{+1/32} ₋₀ [7,1 ^{+0,8} ₋₀]	CT-100A (DNF18 ONLY) CT-600A W/CT-520CH CT-1525 CT-2500 W/CT-2525CH/CD-525
DNF14-250FIM	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,0]	.90 [22,9]	.42 [10,7]	.27 [6,9]		

NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE (CSA)
 - 257°F [125°C] MAX. OPERATING TEMPERATURE (UL)
 - 600V. MAX. BLDG WIRE (1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
- MATERIAL:
 - STAMPING: CDA 260 BRASS, NICKEL PLATED
 - HOUSING: TYPE 6/6 NYLON
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- NYLON HOUSING IS TRANSLUCENT

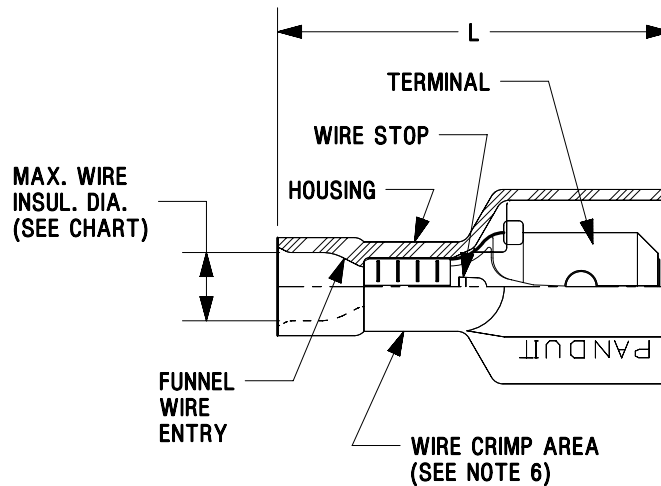

LISTED 20H3 E78522
CERTIFIED LR31212

TITLE LOOSE PIECE FULLY INSULATED MALE DISCONNECT .250 X .032				
CUSTOMER DRAWING				
ITEM REVISION NAME N41325BA/11				
DATASET FILE NAME N41325BA_DC/11A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
.x ± .1 [2.54]		.xxx ± .005 [.127]		
.xx ± .01 [.25]		ANGLES ± 5 °		
		THIRD ANGLE PROJECTION		
DRAWING NUMBER: A41325				
DRAWN BY JV	DATE -	CHK LM	SCALE N.T.S.	SHEET 1 OF 1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
11	11/14	JHNU	JHNU	RGB	REVISED PART NUMBER: DNF14-250FIM WAS PNF14-250FIM	N41235BA-DC
10	09.	BDK	LCA	VMB	CRIMP TOOL CHART: REMOVED CT-520 ADDED W/CT-520CH AND W/CT-2525CH/CD-525 BROUGHT DRAWING TO CURRENT STANDARDS	A41325

D101000A/12