


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE AWG [mm ²]	COLOR	DIMENSIONS in. [mm]				
				MAX. INSUL.	MIN. INSUL.	L ± .03 [0,8]	B ± .01 [0,3]	C ± .004 [0,1]
DNF18-250	.250 X .032 [6,4 X 0,8]	#22-18 [0,5-1,0]	RED	.14 [3,6]	.04 [1,0]	.81 [20,6]	.29 [7,4]	.12 [3,1]
DNF14-250		#16-14 [1,5-2,5]	BLUE	.16 [4,1]	.05 [1,3]	.83 [21,1]	.29 [7,4]	.12 [3,1]

NOTES :

1. USED FOR:
 - A. STRANDED COPPER WIRE ONLY
 - B. 194°F [90°C] MAX. OPERATING TEMPERATURE
 - C. 300 V. MAX VOLTAGE RATING
 - D. 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
2. INSTALLATION TOOLS:
 - A. UL LISTED AND CSA CERTIFIED: CT-1550, CT-1551, CT-600A (CT-570CH), CT-2500 (CT-2570CH)
 - B. PANDUIT APPROVED: CT-100A, CT-160, CT-260, CT-1550, CT-1551
3. WIRE STRIP LENGTH: 9/32" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1 $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]
4. MATERIAL:
 - A. STAMPING: BRASS, TIN PLATED
 - B. HOUSING: NYLON
 - C. SLEEVE: BRASS, TIN PLATED
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT


MAX. OR
MIN. WIRE
INSUL. DIA.

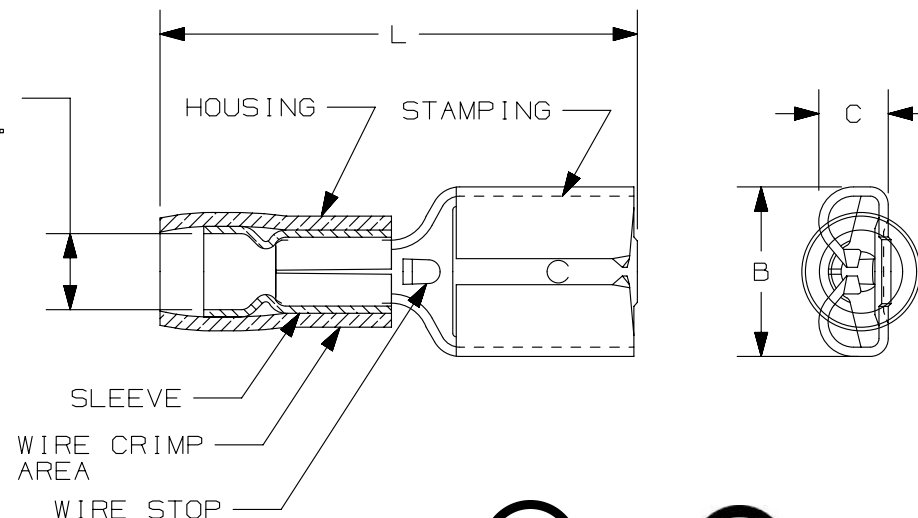

LISTED
20H3
F78522



CERTIFIED
LR31212

											TITLE FEMALE DISCONNECTS, NYLON INSULATED, FUNNEL			
											CUSTOMER DRAWING			
											ITEM REVISION NAME N41200BA/08		PANDUIT	
											DATASET FILE NAME N41200BA_DC/08A			
											UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [.254] .xxx ± .005 [.13] .xx ± .01 [.25] ANGLES ± 5 °  THIRD ANGLE PROJECTION			
08	10.02.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED TO CURRENT STANDARDS.	A41200					MATERIAL: SEE NOTES			
											DRAWING NUMBER: A41200			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY FES	DATE -	CHK LA	SCALE N.T.S.	SHEET 1 OF 1		SIZE A	