

17.42 [442.5]

0.79 [20.1]

1.17 [29.6]

RETENTION CAP SNAPS ONTO CONNECTOR

PANDUIT PART NO.	WEIGHT (APPROX.)
DP24688TGY	1.25 lb (567 g)
DP24688TGWH	1.25 lb (567 g)

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.

2. MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULE: THERMOPLASTIC RESIN
UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC
RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN
UL94H-B

RETENTION CAP:
THERMOPLASTIC RESIN UL94V-0


3. 24 PORT PATCH PANEL 8 POSITION
8 WIRE.



4. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
5. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.

6. DIMENSIONS IN [] ARE IN METRIC.

7. USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.

8. RETENTION CAPS
(ONE PER CONNECTOR)
PROVIDED FOR SNAP-IN ON TERMINATED
CONNECTORS.

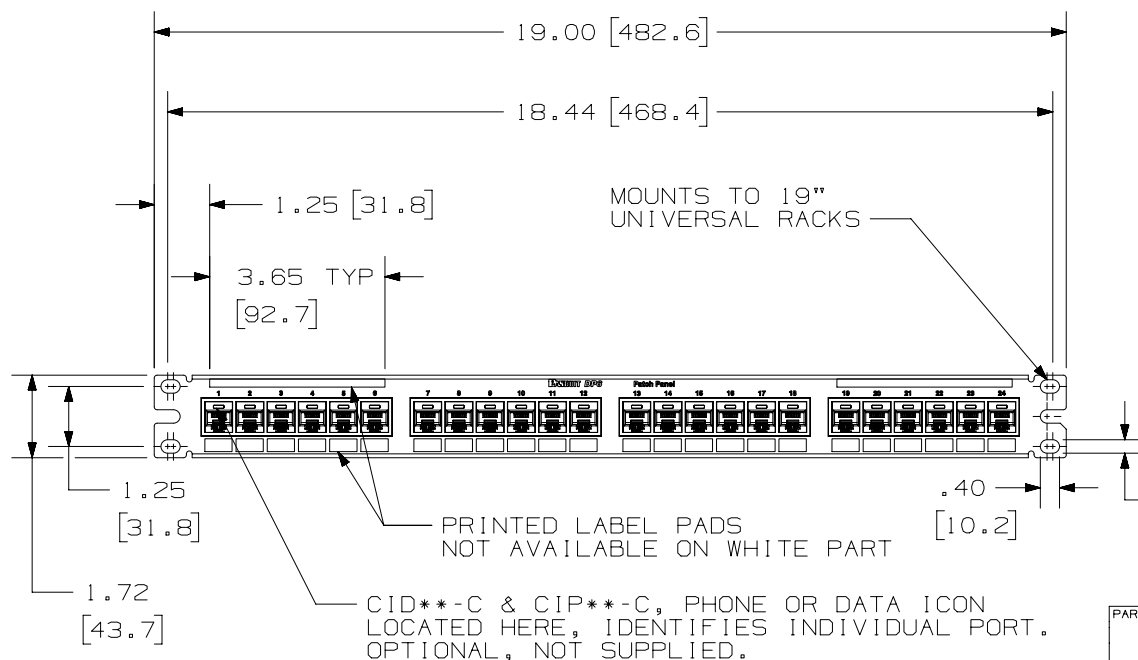

PART NUMBER					DP24688TGY ; DP24688TGW				
TITLE									
DP6 PLUS 24 PORT PATCH PANEL									
CUSTOMER DRAWING									
ITEM REVISION NAME									
M02479JF/01									
DATASET FILE NAME					MATERIAL :				
M02479JF_DC242/01A									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					DRAWING NUMBER: 02479-242				
.X ± .XXX ± .010 [.3] .XX ± .03 [.8] ANGLES ±									
					THIRD ANGLE PROJECTION				
DRAWN BY	DATE	CHK	SCALE	SIZE					
LZ	3-4-06	CEF	NONE	SHT 1 OF 1			A		