


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

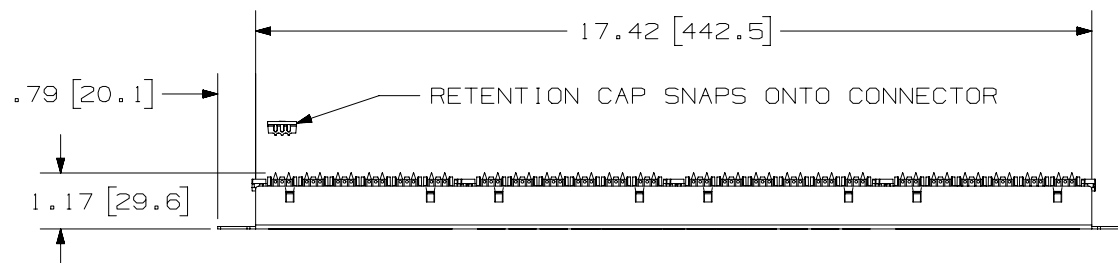


A

PANDUIT PART NO.	WEIGHT (APPROX.)
DP246X88TGY	1.25 lb (567 g)
DP246X88TGWH	1.25 lb (567 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN [] ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

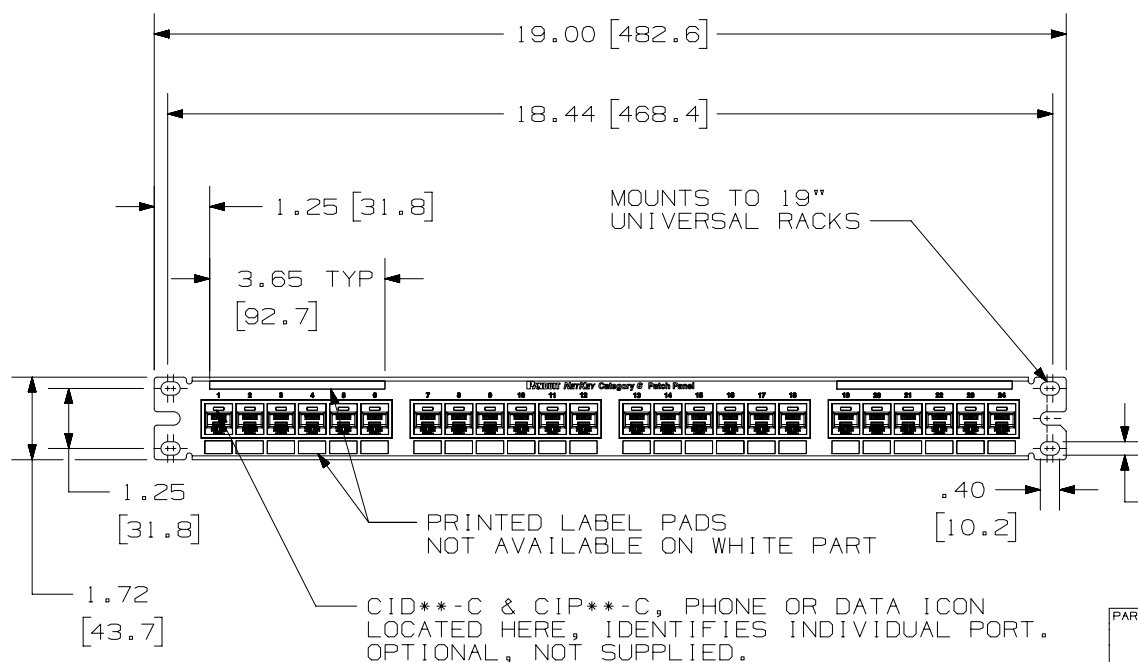

B

PART NUMBER
DP246X88TGY ; DP246X88TGWH

TITLE

DP6A 10GIG 24 PORT PATCH PANEL

CUSTOMER DRAWING

ITEM REVISION NAME

M02479JB/01

DATASET FILE NAME

M02479JB_DC238/01A


UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ±

.xx ± .03 [.8]

.xxx ± .010 [.3]

ANGLES ±



THIRD ANGLE
PROJECTION

MATERIAL:

DRAWING NUMBER:

02479-238

DRAWN BY

DATE

3-4-06

CHK

CEP

SCALE

NONE

SHT 1 OF 1

SIZE

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
3	9-27-18	BAME	KRKE	MMR	A. ADDED P/N DP246X88TGWH; B. REMOVED M6 SCREWS	M09000HW
2	6/18/14	JSP	REFR	MMR	REVISED AND REDRAWN, PREVIOUS REVISIONS HAVE BEEN OMITTED.	02479-238