




## Grounding Clamp with Spacer for Flat Surfaces, Bronze

### Type GM

- Used to ground copper code conductor to flat surfaces
- Cast from high strength, electrolytic bronze to provide reliable grounding connections
- High strength silicon bronze hardware for long term reliable assembly
- Accommodates a wide range of conductor sizes – minimizes inventory requirements
- Incorporates spacer plate to separate conductor from mounting surface
- UL Listed for grounding and bonding and suitable for direct burial in earth or concrete

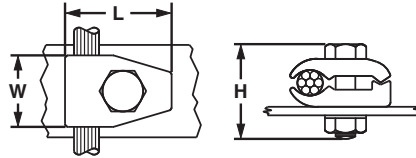


| Part Number | Conductor Size Range | Figure Dimensions In. (mm) |                |                | Hex Size (In.) |      | Std. Pkg. Qty. |
|-------------|----------------------|----------------------------|----------------|----------------|----------------|------|----------------|
|             |                      | L                          | W              | H              | Bolt           | Nut  |                |
| GM-2-Q      | #4 SOL – 2/0 STR     | 1.63<br>(41.4)             | 1.13<br>(28.7) | 1.75<br>(44.5) | 9/16           | 9/16 | 25             |
| GM-3-Q      | 2/0 SOL – 250 kcmil  | 2.13<br>(54.1)             | 1.50<br>(38.1) | 2.00<br>(50.8) | 3/4            | 3/4  | 25             |



## Grounding Clamp for Flat Surfaces, Bronze

### Type GMS

- Used to ground copper code conductor to flat surfaces
- Cast from high strength, electrolytic bronze to provide reliable grounding connections
- High strength silicon bronze hardware for long term reliable assembly
- Accommodates a wide range of conductor sizes – minimizes inventory requirements
- UL Listed for grounding and bonding and suitable for direct burial in earth or concrete

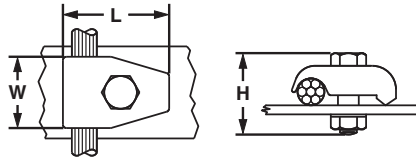

| Part Number | Conductor Size Range | Figure Dimensions In. (mm) |                |                | Hex Size (In.) |      | Std. Pkg. Qty. |
|-------------|----------------------|----------------------------|----------------|----------------|----------------|------|----------------|
|             |                      | L                          | W              | H              | Bolt           | Nut  |                |
| GMS-1-X     | #8 SOL – #4 STR      | 1.25<br>(31.8)             | 1.00<br>(25.4) | 1.63<br>(41.4) | 9/16           | 9/16 | 10             |
| GMS-2-Q     | #4 SOL – 2/0 STR     | 1.63<br>(41.4)             | 1.13<br>(28.7) | 1.75<br>(44.5) | 9/16           | 9/16 | 25             |
| GMS-3-Q     | 2/0 SOL – 250 kcmil  | 2.13<br>(54.1)             | 1.50<br>(38.1) | 2.00<br>(50.8) | 3/4            | 3/4  | 25             |

A.  
System  
Overview

B1.  
Cable Ties

B2.  
Cable  
Accessories

B3.  
Stainless  
Steel Ties

C1.  
Wiring  
Duct

C2.  
Surface  
Raceway

C3.  
Abrasion  
Protection

C4.  
Cable  
Management

D1.  
Terminals

D2.  
Power  
Connectors

D3.  
Grounding  
Connectors

E1.  
Labeling  
Systems

E2.  
Labels

E3.  
Pre-Printed  
& Write-On  
Markers

E4.  
Permanent  
Identification

E5.  
Lockout/  
Tagout  
& Safety  
Solutions

F.  
Index