
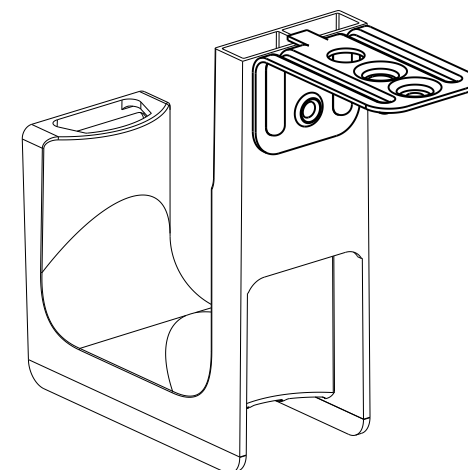
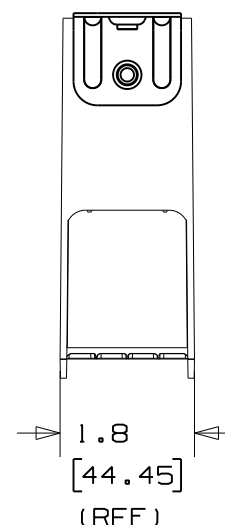


.39 $\emptyset$
[9.91]
(REF)

-.26 ϕ
[6.73]
(REF)

- .18 ϕ
 [4.57]
 (REF)


PANDUIT PART NO.	WEIGHT lbs 10 (g) pcs
JP2CMB- ---	1.874 (850)

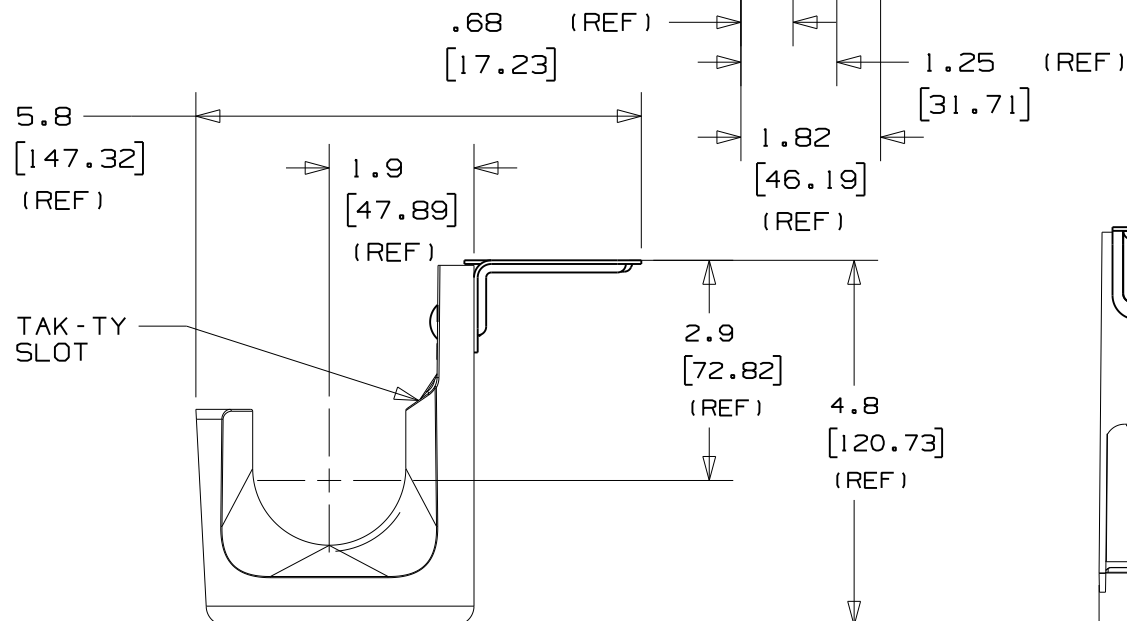

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
2. HOOK MATERIAL: NYLON 6/6
ANGLE BRACKET MATERIAL: PRE-GALVANIZED STEEL,
RIVET MATERIAL: ALUMINUM
3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 2" (50.8) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 30 lbs.
4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
5. PRODUCT MARKINGS:

"ULC logo and statement:
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH
SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
ULC logo and statement:
"IN ACCORDANCE WITH CAN/ULC S-102.2-10 IN SINGLE UNITS OR
PAIRS, 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=35."

OO	11/09/2012	DBLA	GGC	KLN	INITIAL RELEASE	GAECN00221
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE		J-PRO CEILING MOUNT J-HOOK (JP2CMB-___)	
		CUSTOMER DRAWING	
ITEM REVISION NAME		121031AC/00	
DATASET FILE NAME		121031AC_DC_C11002/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x : .1 [2.54] .xxx : .005 [.127] .xx : .01 [.25] ANGLES : 5 °		MATERIAL: SEE NOTE 2	
		DRAWING NUMBER: C11002	
DRAWN BY	DATE	CHK	SCALE
DBLA	11/09/2012	KLN	NONE
			SHT 1 OF 1
			A