




223-PC

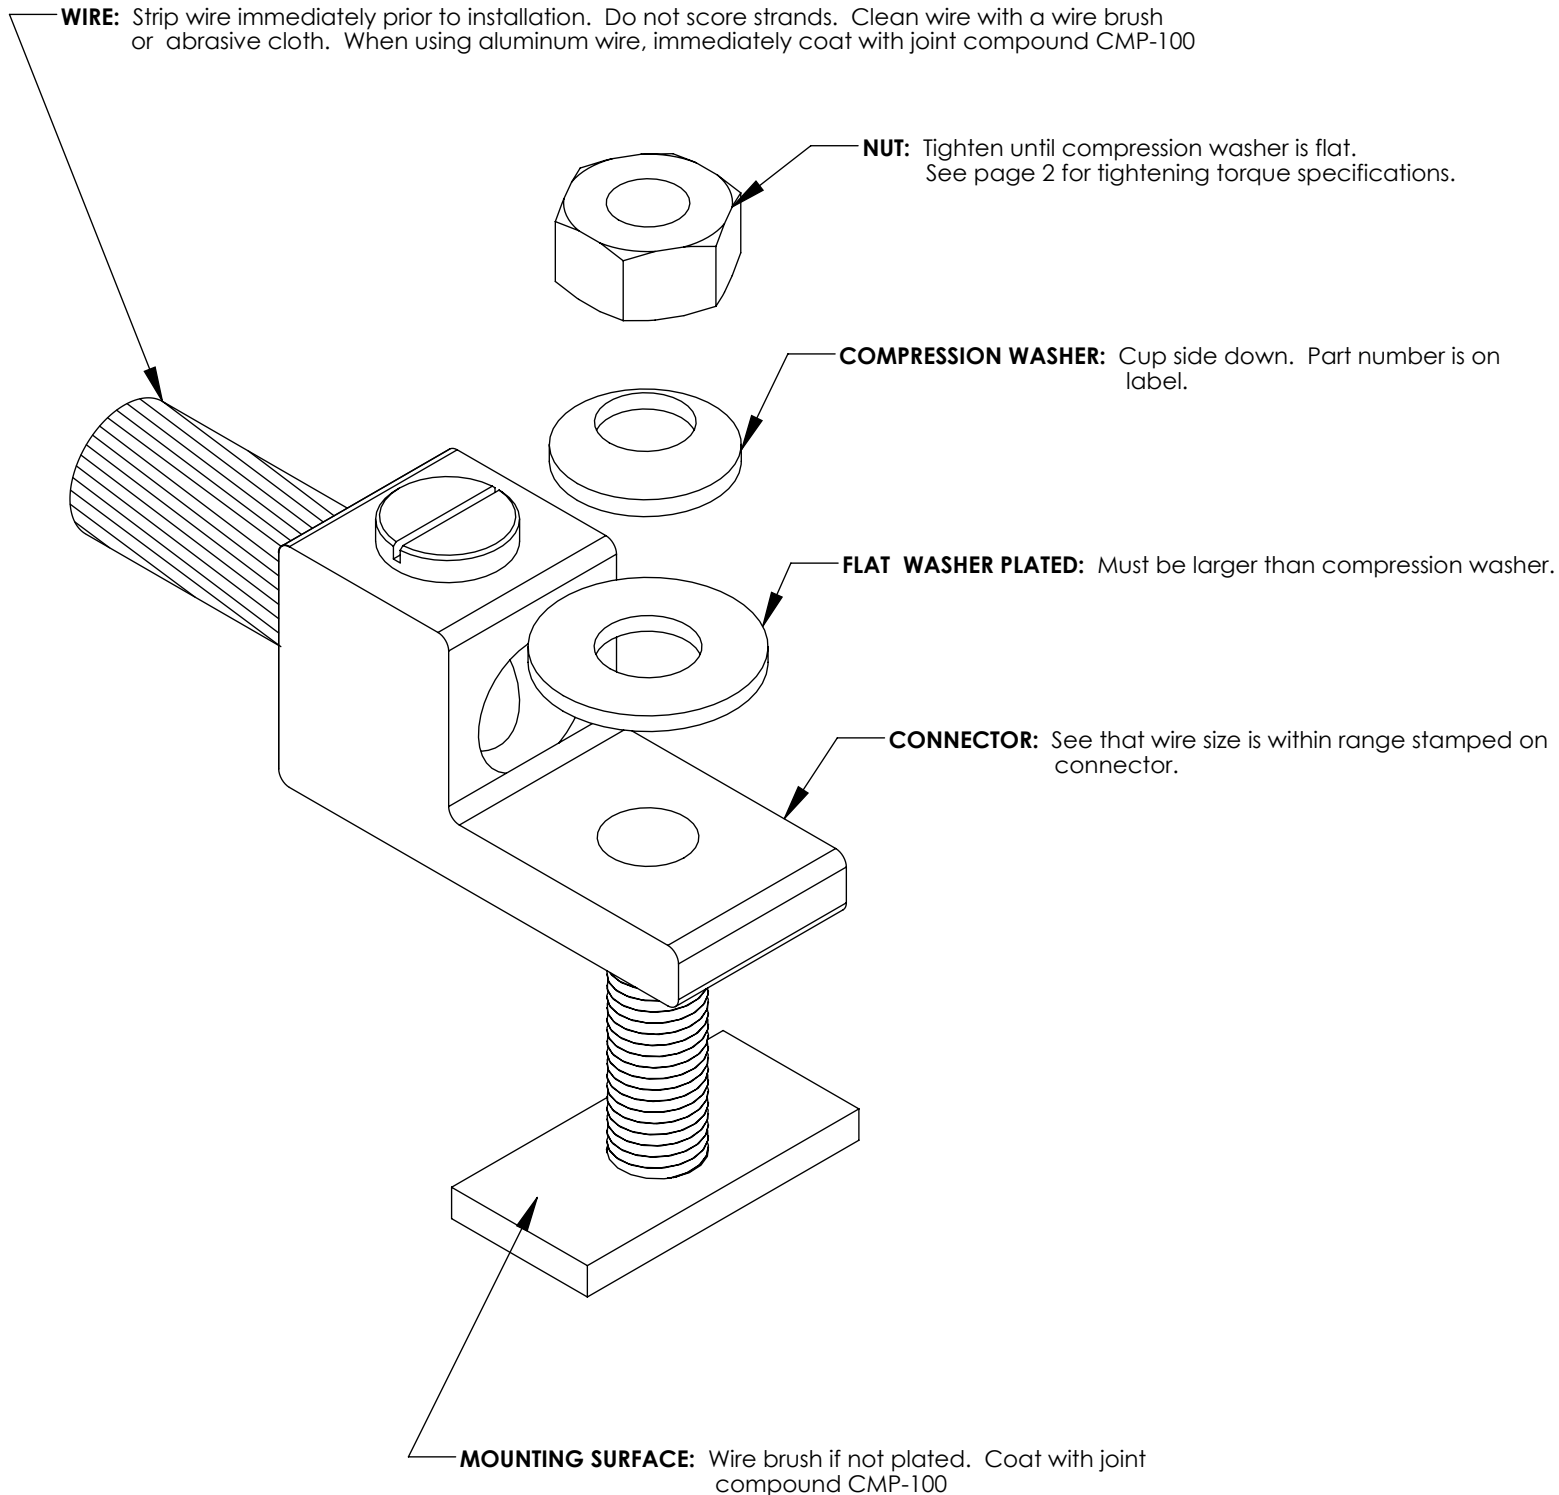

**Torque Chart for Aluminum Mechanical Connectors
Types LAMA, LAMB, LAM2A, LAM2B, LAM2SB, LAM3B, LAM3SB, LAM3D,
LAM4SB, LAM4D**

| Panduit Part Number | AWG or CIRCULAR MILL SIZE | TIGHTENING TORQUE INCH-LBS | TIGHTENING TORQUE N-M |
|---------------------|---------------------------|----------------------------|-----------------------|
| LAMA6-14-QY | 10-14 8 6 | 20 25 35 | 2.3 2.8 4.0 |
| LAMA2-14-QY | 10-14 8 4-6 2-3 | 35 40 45 50 | 4 4.5 5.1 5.6 |
| LAMA1/0-56-Q | 10-14 8 4-6 1/0-3 | 35 40 45 50 | 4 4.5 5.1 5.6 |
| LAMA1/0-14-QY | 10-14 8 4-6 1/0-3 | 35 40 45 50 | 4 4.5 5.1 5.6 |
| LAMA2/0-14-QY | 2/0-14 | 120 | 13.6 |
| LAMA250-56-QY | 250-6 | 275 | 31.1 |
| LAMA300-56-QY | 300-6 | 275 | 31.1 |
| LAMA350-38-QY | 350-6 | 275 | 31.1 |
| LAMA500-38-6Y | 500-4 | 500 | 56.5 |
| LAMA600-38-6Y | 600-2 | 500 | 56.5 |
| LAMA600S-38-6Y | 600-4 (2)250-1/0 | 550 | 62.1 |
| LAMA1000-58-6Y | 1000-500 | 550 | 62.1 |
| LAMB350-12-6Y | 350-6 | 275 | 31.1 |
| LAMB600-12-3Y | 600-2 | 500 | 56.5 |
| LAMLB1000-12-3 | 500-1000 | 550 | 62.1 |
| LAM2A1/0-14-6Y | 10-14 8 4-6 1/0-3 | 35 40 45 50 | 4 4.5 5.1 5.6 |
| LAM2A2/0-14-6Y | 2/0-14 | 120 | 13.6 |
| LAM2A250-38-6Y | 250-6 | 275 | 31.1 |
| LAM2A350-12-6Y | 350-6 | 275 | 31.1 |
| LAM2A600-12-6Y | 600-2 | 550 | 62.1 |
| LAM2A1000-58-6Y | 1000-500 | 550 | 62.1 |
| LAM2SA300-56-3 | 300-6 | 275 | 31.1 |
| LAM2B350-12-3Y | 350-6 | 275 | 31.1 |
| LAM2LB600-12-3 | 600-2 | 375 | 42.4 |
| LAM2LB1000-12-3 | 1000-500 | 500 | 56.5 |
| LAM2SB600-38-1Y | 600-2 | 375 | 42.4 |
| LAM2SB750-38-1Y | 750-1/0 | 375 | 42.4 |
| LAM2SSB500-141Y | 500-4/0 | 500 | 56.5 |
| LAM3B2-56-6Y | 10-14 8 4-6 2-3 | 35 40 45 50 | 4 4.5 5.1 5.6 |
| LAM3B1/0-38-6Y | 10-14 8 4-6 1/0-3 | 35 40 45 50 | 4 4.5 5.1 5.6 |
| LAM3B3/0-12-3Y | 3/0-6 | 200 | 22.6 |
| LAM3B250-12-1Y | 250-6 | 275 | 31.1 |
| LAM3B350-12-1Y | 350-6 | 275 | 31.1 |
| LAM3LB600-12-1 | 600-2 | 375 | 42.4 |
| LAM3LB1000-121Y | 1000-500 | 500 | 56.5 |
| LAM3D3/0-12-3Y | 3/0-6 | 200 | 22.6 |
| LAM3D250-12-1Y | 250-6 | 275 | 31.1 |
| LAM3D350-12-1Y | 350-6 | 275 | 31.1 |
| LAM3LD600-12 -1 | 600-2 | 375 | 42.4 |
| LAM3LD1000-121Y | 1000-500 | 500 | 56.5 |
| LAM4SB600-38-1Y | 600-2 | 375 | 42.4 |
| LAM4SB750-38-1Y | 750-1/0 | 375 | 42.4 |
| LAM4D250-12-1Y | 250-6 | 275 | 31.1 |
| LAM4D350-12-1Y | 350-6 | 275 | 31.1 |
| LAM4LD600-12 -1 | 600-2 | 375 | 42.4 |
| LAM4LD1000-12-1 | 1000-500 | 500 | 56.5 |

For Instructions in Local Languages
and Technical Support:

www.panduit.com/resources/install_maintain.asp

PANDUIT

www.panduit.com

E-mail:
cs@panduit.com

Fax:
708-444-6993