


NOTES:

1. MATERIAL:
BODY - ALUMINUM, TIN PLATED
SCREW - ALUMINUM, TIN PLATED
2. UL LISTED & CSA CERTIFIED FOR USE UP TO 600V &
TEMPERATURE RATED 90 °C (AL9CU)
3. DUAL RATED FOR USE WITH COPPER OR ALUMINUM
STRANDED CODE CONDUCTOR
4. THESE PARTS ARE RoHS COMPLIANT
5. USE OF OXIDE INHIBITING JOINT COMPOUND LIKE
PANDUIT CMP-100 RECOMMENDED FOR PAD TO PAD
AND CONDUCTOR SURFACES
6. SEE PACKAGING LABEL FOR TIGHTENING TORQUE
INFORMATION
7. PKG QTY:
1=1

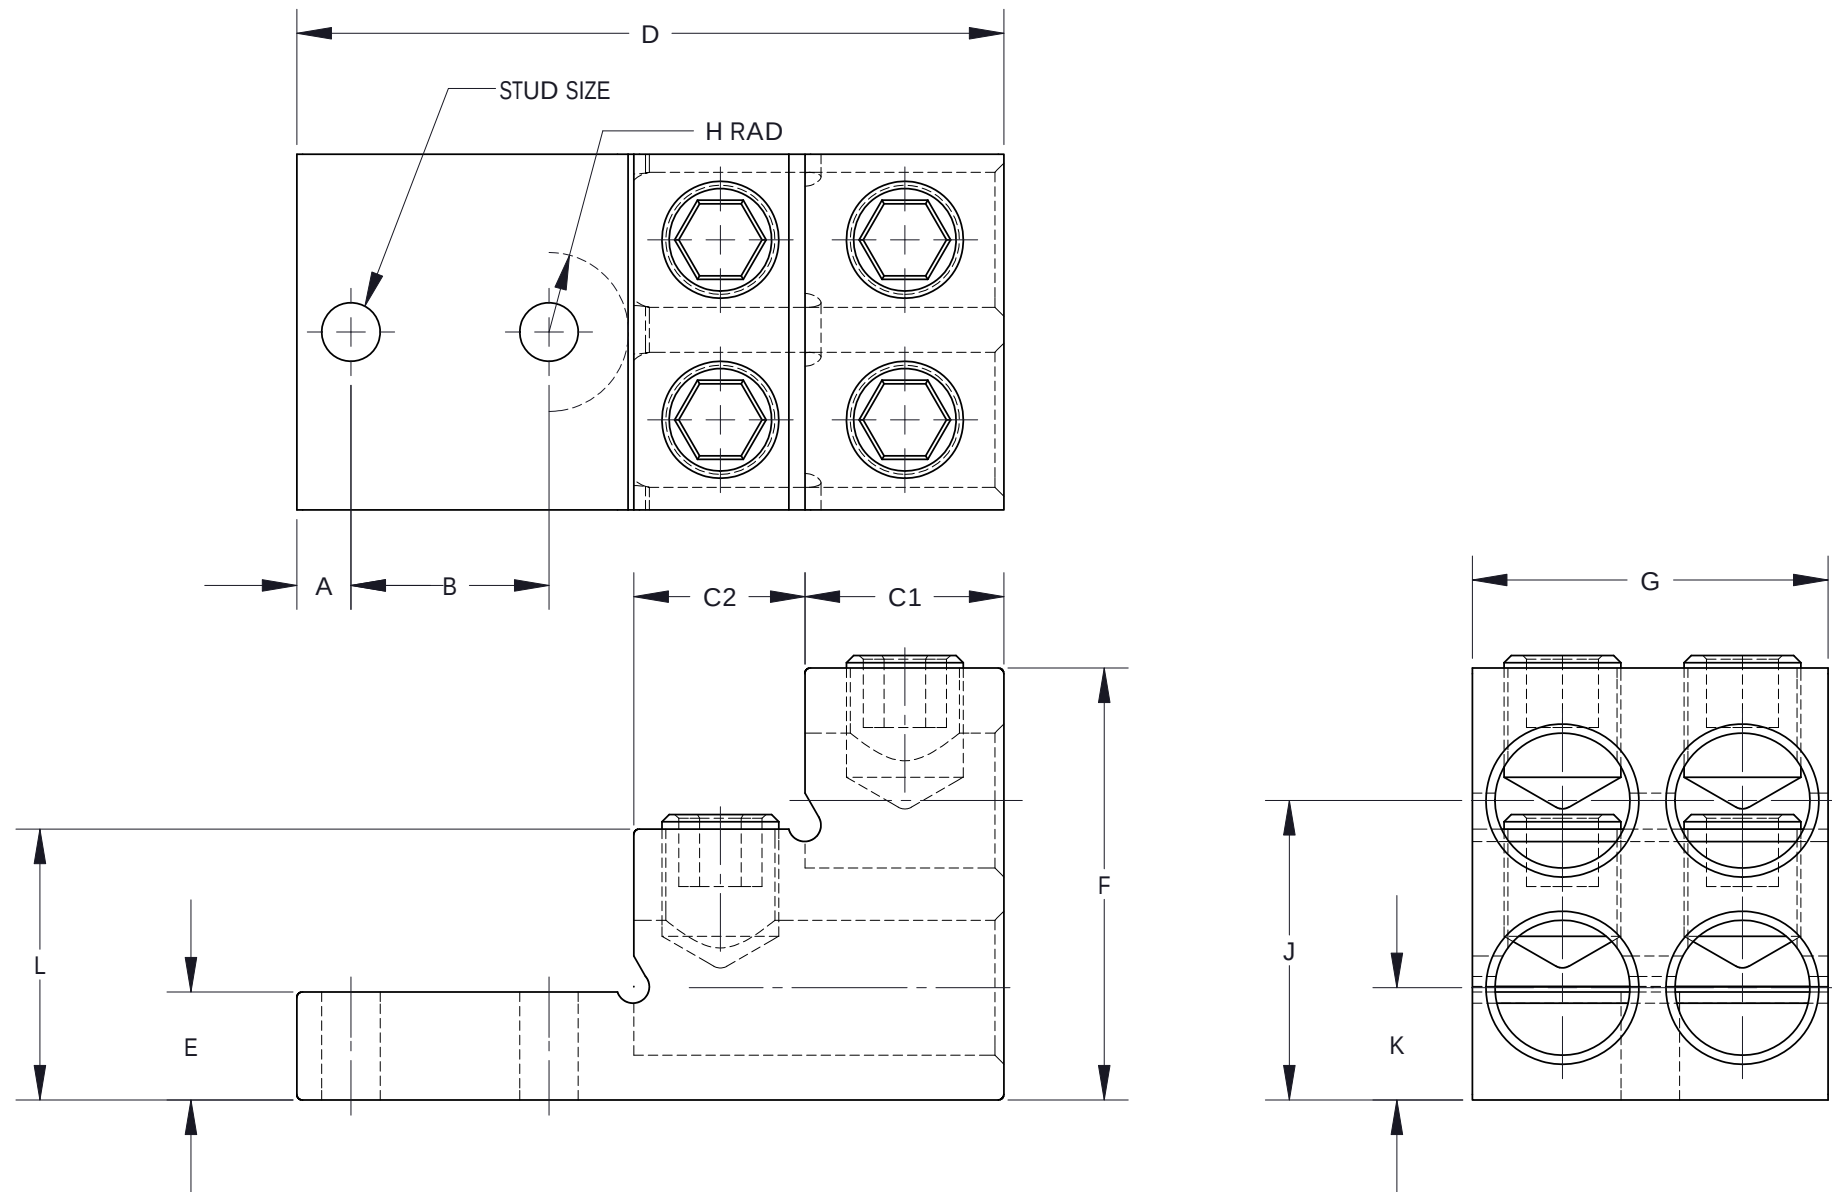

PART NUMBER	STUD SIZE	DIMENSIONS - IN [mm]													WIRE STRIP LENGTH - TOP HOLES	WIRE STRIP LENGTH - BOTTOM HOLES	WIRE RANGE	HEX KEY*
		A	B	C1	C2	D	E	F	G	H	J	K	L					
LAM4SB600-38-1Y	3/8	.38 [9.7]	1.38 [35.1]	1.38 [35.1]	1.19 [30.2]	4.91 [124.7]	.75 [19.1]	3.00 [76.2]	2.47 [62.7]	.59 [15.0]	2.08 [52.8]	.78 [19.8]	1.88 [47.8]	1.38 [35.1]	2.57 [65.3]	600kcmil - 2 AWG	3/8	
LAM4SB750-38-1Y	3/8	.38 [9.7]	1.38 [35.1]	1.38 [35.1]	1.19 [30.2]	4.91 [124.7]	.75 [19.1]	3.00 [76.2]	2.84 [72.1]	.59 [15.0]	2.08 [52.8]	.78 [19.8]	1.88 [47.8]	1.38 [35.1]	2.57 [65.3]	750kcmil - 1/0 AWG	3/8	

PANDUIT CORP. TINLEY PARK, ILLINOIS

								PANDUIT CORP. TINLEY PARK, ILLINOIS			
									LAM4SB SERIES ALUMINUM MECHANICAL LUGS CUSTOMER DRAWING		
03	9/10	JHNU	JHNU	C. REVISED DIMENSIONS FOR LAM4SB600-38-1Y B. REVISED DIMENSIONS FOR LAM4SB750-38-1Y A. REMOVED TIGHTENING TORQUE & WEIGHT COLUMN	N41565BA-C41565	FLD	FLD			UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION
02	1/07	JHNU	JHNU	ADDED PART WEIGHT COLUMN TO TABLE							
01	3/06	JHNU	LEM	REVISED RoHS NOTE						DRAWN BY JHNU	MAT'L:
00	2/06	JHNU	LEM	DRAWING RELEASED - RoHS COMPLIANT				DATE 2/06	DRAWING NO / CAD FILE C41565_03	DWG B SIZE	
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP	CHK'D			