

DV-HDA-12

HDMI Distribution Amplifier

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

FSR

Video Products Group

DV-HDA-12




Connect with Confidence

The DV-HDA-12, HDMI Distribution Amplifier, allows one HDMI source such as a Blu-ray, Set-top Box, or PC to be sent to two digital displays.

The DV-HDA-12 is HDMI V1.3 compliant and supports resolutions up to 1080p @ 60Hz with 36-bit color depth, Dolby®True HD, DTS-HD.

While complying with HDCP (High-bandwidth Digital Content Protection) V2.1 at all output channels, a signal from a single source can be sent simultaneously to several displays.

The built-in amplification function enables HDMI signal distribution without signal loss.

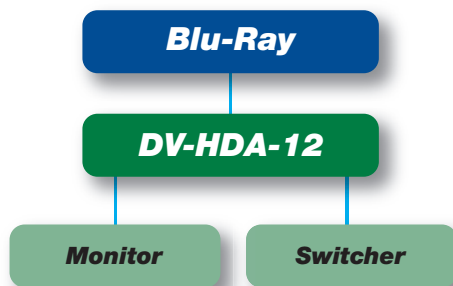

APPLICATIONS

- Video Wall System
- Large LED Sign Board
- Medical Imaging Equipment
- TV Broadcast Station
- Auditorium
- Conference Room
- Church Video System

FEATURES

- HDMI V1.3
- HDCP V2.1
- High Quality Picture - No Signal Loss and Digital Noise Free
- Signal Amplification for signal reliability and long length signal transmission.
- DV-HDA-12 enables daisy chain connection of up to 4 layers of distribution
- EDID Selectable for Non-Standard Displays
- LED Feedback for Signal Verification

SPECIFICATIONS

- Bandwidth: 225Mhz
- HDTV Resolutions: 480p, 720p, 1080i/p
- VESA Standard Resolutions to UXGA (1600 x 1200) @ 60Hz
- Input Channel: 1
- Output Channels: 2
- Signals & Connectors: Input & Output HDMI Type A Single Link Connector
- Power Supply: DC 5V/2.0A Adapter Included.
- Power Consumption: 3 Watt
- Operating Temperature: 0-40°C
- Humidity: Less than 80%
- Dimension (WxDxH): 7.25in (185mm) x 4.5in (115mm) x 1.5in (38mm)
- Weight: 1.25 lb (0.6 kg)

FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424
Phone: 973.785.4347 · Fax: 973.785.4207
Order Desk: 1-800-332-FSR1
Web: www.fsrinc.com · E-mail: sales@fsrinc.com



Specifications are subject to change without notice.