

# R&S® HMC804x

## Power Supply

### 100 W and 1, 2 or 3 Channels



**Total output power**  
All models: 100 W

**Output current per channel**  
HMC8041: max. 10 A  
HMC8042: max. 5 A  
HMC8043: max. 3 A

**EasyArb**  
Create individual V/I curves  
directly on the device

**FuseLink**  
Combine electronic fuses  
as required

**EasyRamp**  
Simulate a startup curve,  
programmable directly on the  
device

**Sequencing**  
Sequenced start of channels

**Trigger input**  
Start and control  
EasyArb, et al.

**Analog input**  
Control output channel  
with external voltage and  
current


**High energy efficiency**  
Low heat dissipation and  
quiet fan

**Brilliant Screen**  
QVGA TFT Display  
with 320 x 240 Pixels

**Data logging**  
To USB flash drive in CSV format

**Protection**  
Overvoltage (OVP) and Overpower  
protection (OPP) for all outputs

**UI-Tracking**  
Convenient parallel and  
serial operation

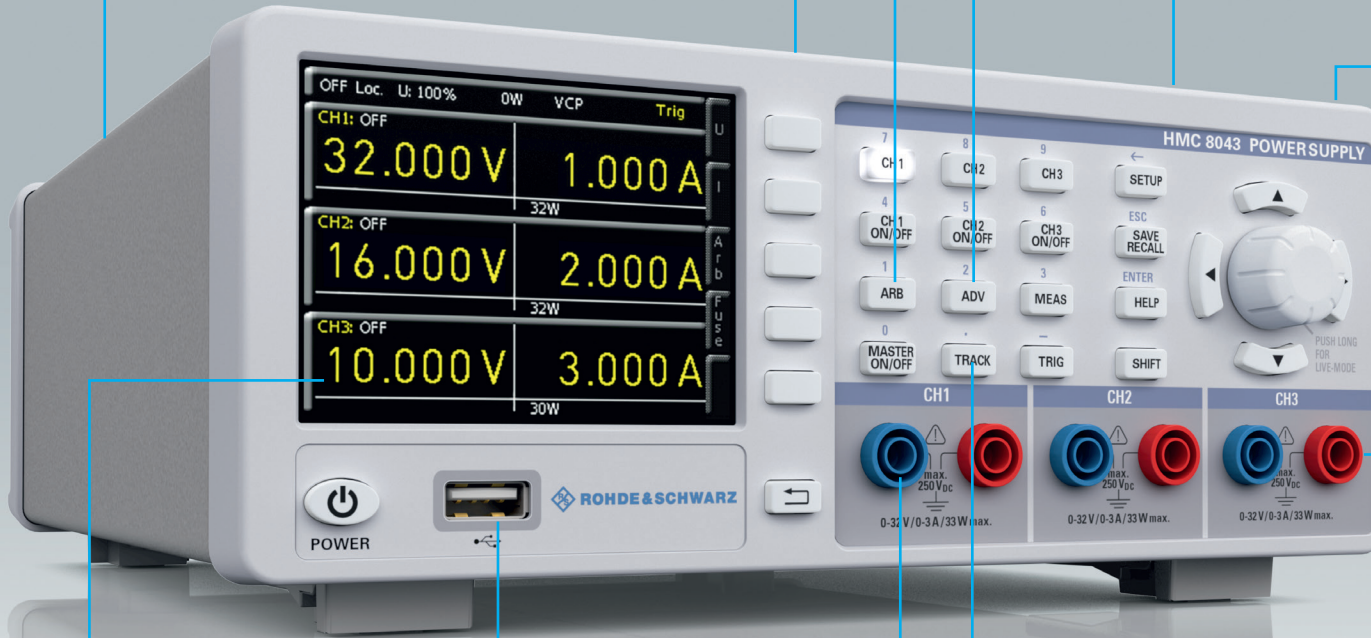

# At a glance

One, two or three channels – R&S®HMC804x power supplies with their specifications and wide range of functions are ideal for use in development labs and industrial environments. Thanks to their high energy efficiency, the linear power supplies remain cool and quiet, even at maximum load. Practical interfaces and connectors allow users to work quickly and conveniently with the R&S®HMC804x, even in 19" racks.

The R&S®HMC804x family consists of three models with a maximum total power of up to 100W and a continuous voltage range from 0V to 32V. The one-channel R&S®HMC8041 delivers a maximum of 10A, the two-channel R&S®HMC8042 a maximum of 5A and the three-channel R&S®HMC8043 a maximum of 3A per channel. The two-channel and three-channel models enable users to connect multiple outputs in parallel or in series to increase the voltage or current. The outputs are galvanically isolated, floating, and protected against overloading and short circuits. Voltage, current and power values are output on a brilliant QVGA display.

The R&S®HMC804x offers a wide range of logging functions, an integrated energy meter and electronic fuses that can be individually combined for each channel, making it ideal for hardware developers, labs and industrial environments. Linear switching power supplies ensure high efficiency, for minimum heat dissipation even at full load. Developers and industrial users benefit from useful functions such as sequenced start of channels, EasyArb and EasyRamp functions that are directly programmable on the device, an analog input for external control of voltage values, an external trigger input for controlling channels and arb steps, and adjustable overvoltage/overpower protection for each channel.



All connectors, including SENSE, are available on the rear panel. A cage clamp facilitates rack installation and deinstallation. The LXI-compliant power supply can be controlled via LAN, USB or an optional GPIB interface. The CDC (virtual COM port) and TMC classes are supported for communications via USB. The remote control commands are based on the SCPI standard.

The R&S®HMC804x power supplies from the Rohde & Schwarz value instruments product range offer top quality and intelligent, practical functions at an extremely attractive price.

# Key facts

## Clear display of all measured parameters

- Brilliant QVGA color display (320 x 240 pixel)
- Realtime voltage, current and power values
- High setting and readback resolution: 1 mV and 0.1 mA/1.0 mA (depending on current and model)
- Low residual ripple due to linear postregulation
- High energy efficiency, low heat dissipation and quiet fan

## Galvanically isolated, floating and short-circuit-proof outputs

- Front panel: 4 mm (0.16 in) safety sockets (R&S®HMC8041 including SENSE)
- Rear panel: WAGO cage clamp for all channels including SENSE
- Convenient parallel and serial operation via
- V/I tracking

## Protective functions adjustable for each channel

- Overvoltage protection (OVP) for all outputs
- Overpower protection (OPP) for all outputs
- FuseLink (freely combinable electronic fuses)
- FuseDelay (fuse activation delay)

## Ideal power supply for hardware developers and labs

- EasyArb function for user-definable V/I curves
- EasyRamp for simulating a start-up curve (directly programmable on device)
- Sequencing (sequenced start of channels)
- Energy meter (measurement of energy output)
- Analog input for external control via voltage (0 V to 10 V) and current (4 mA to 20 mA)
- Trigger input for starting/controlling EasyArb
- Data logging to USB flash drive in CSV format

## Remote control

- USB interface (CDC/virtual COM port, TMC)
- LAN interface, LXI-compliant
- Optional GPIB interface
- Remote control via SCPI-based commands

Application	How the HAMEG R&S®HMC804x meets your needs
Engineering lab	<ul style="list-style-type: none"><li>■ FuseLink (freely combinable electronic fuses)</li><li>■ EasyArb function for user-definable V/I curves</li><li>■ EasyRamp for simulating a start-up curve (directly programmable on device)</li><li>■ Built-in energy meter</li><li>■ Data logging to USB flash drive in CSV format</li></ul>
Automatic test equipment (ATE)	<ul style="list-style-type: none"><li>■ Analog input for external control via voltage (0 V to 10 V) and current (4 mA to 20 mA)</li><li>■ Trigger input for starting/controlling EasyArb</li><li>■ Sequencing (sequenced start of channels)</li></ul>
Production environment	<ul style="list-style-type: none"><li>■ Rear connectors for all channels, including SENSE</li><li>■ WAGO cage clamp on the rear panel for easy installation and deinstallation</li><li>■ Remote control via SCPI-based commands</li><li>■ LAN interface, integrated web server, LXI-compliant</li><li>■ Optional GPIB interface (R&amp;S®HMC804xG models)</li></ul>

# Ideal for industrial environments



Power supply units in industrial production environments are often found in 19" racks. The HMC804x series instruments are very suitable for this use as all models can be integrated into 19" racks with the rack mounting kits HZC95. Two HMC8043 models built side by side result in 6 channels on 2 rack units. Please ensure sufficient space is available in the rack for adequate cooling (required minimum space above a HMC804x: 1 rack unit). Additionally, all front panel connectors plus SENSE lines are located at the back panel of the instrument. In order to facilitate the regular fitting-out for calibration the rear panel connector was designed with a WAGO cage clamp. The complementary part is available as option HZC40.

Base unit	Channels	Power	GPIB-Interface
R&S®HMC8043G	3	99 W (33 W/Channel, 3 A (max.))	✓
R&S®HMC8043	3	99 W (33 W/Channel, 3 A (max.))	✗
R&S®HMC8042G	2	100 W (50 W/Channel, 5 A (max.))	✓
R&S®HMC8042	2	100 W (50 W/Channel, 5 A (max.))	✗
R&S®HMC8041G	1	100 W (10 A (max.))	✓
R&S®HMC8041	1	100 W (10 A (max.))	✗

## R&S®HMC8043, R&S®HMC8042, R&S®HMC8041 Power Supply

The specifications are based on a 30 min warm-up period.

### Electrical Specifications

Total power output	100W
Maximum power per Channel	
R&S®HMC8043	33W
R&S®HMC8042	50W
R&S®HMC8041	100W
Voltage Output	0-32V
Current Output	
R&S®HMC8043	3A max (power limit)
R&S®HMC8042	5A max
R&S®HMC8041	10A max
Number of outputs	
R&S®HMC8043	3
R&S®HMC8042	2
R&S®HMC8041	1
Line & load regulation (Sense connected)	
Constant voltage	
R&S®HMC8043	<0.02% + 3mV
R&S®HMC8042	<0.03% + 5mV
R&S®HMC8041	<0.03% + 5mV
Constant Current	
R&S®HMC8043	<0.03% 200µA
R&S®HMC8042	<0.03% 200µA
R&S®HMC8041	<0.03% 200µA
Voltage ripple 20Hz to 20MHz (Front connector)	450µV <sub>rms</sub> / 4mV <sub>pp</sub>
Current ripple 20Hz to 20Mhz	typ. <1mA <sub>rms</sub>
Response time (10%...90% load change)	1ms (±20mV)
Remote Sense max. voltage	1V
Programming accuracy (23° C ±5° C)	
voltage: all models	<0.05% +2mV
current: R&S®HMC8043	0.05% +2mA
R&S®HMC8042/41	0.1% +5mA
Readback accuracy (23° C ± 5° C)	
voltage: all models	<0.05%+2mV
current: R&S®HMC8043	0.05% +2mA
R&S®HMC8042	0.05% +7mA
R&S®HMC8041	0.05% +4mA

Resolution	
voltage	1mV
current	0.1mA (I<1A) 1mA (I>=1A)
Voltage to earth	250V <sub>DC</sub>
Reverse Voltage	33V max.
Inverse Voltage	0.4V max.
Max. current allowed in case of inverse voltage	3A
<b>Supplemental characteristics</b>	
Front connectors	4 mm safety sockets
Rear connectors	Wago male connector (713-1428/037-000), 8x2-pole, pin spacing 3.5 mm / 0.138 in
Temperature coefficient for 12 months (per K) ±(% of output + offset)	voltage: >0,02% +3mV current: >0,02%+3mA
Output voltage overshoot during turn-off of AC power and channel output on	100mV
Over temperature protection	Yes
<b>Voltage programming speed (within 1 % of total excursion)</b>	
Positive voltage change	
no load	10ms + µC-time
with resistive load	10ms + µC-time
Negative voltage change	
no load	500ms + µC-time
with resistive load	10ms + µC-time
Command processing time	<30ms
Over Voltage Protection	Yes
Over Power Protection	Yes
Energiemeter	Yes
EasyRamp	Yes
EasyRamp time	10ms ... 10s
<b>Electronic Fuse</b>	
Fuse trip time	<100us
Fuse linking	<100us + trip time of linked channel
Fuse delay	10ms ... 10s

<b>Analog Interface</b>	
Shunt resistance 4...20mA	250 Ohm
Input resistance 0...10V	>10 kOhm
Update rate V/I interface	10 changes/sec
Response time V/I interface	<150ms
Trigger level	TTL
Trigger response time	<1ms
Resolution	14 bit
<b>Arbitrary (EasyARB)</b>	
Parameter	Voltage, current, time and interpolation mode
Number of Points	512
Dwell time	10ms ... 10min
Repetition rate	continuous or burst mode with 1...255 repetitions
Trigger	manually, interface or trigger input
<b>Logging</b>	
Sampling speed	1000,100,10,1...3600 Sa/s
Resolution R&S®HMC8043	1mV / 0.1mA (<100Sa/s); 10mV / 1mA (1000Sa/s)
Resolution R&S®HMC8042/41	1mV / 1mA (<100Sa/s); 10mV / 10mA (1000Sa/s)
Memory	Internal memory and External memory (USB-Stick)
Maximum number of Points	limited by memory
<b>Sequencing</b>	
Synchronicity	<100us
Delay per channel	1ms ... 60s
Remote interfaces	USB-TMC, USB-CDC (Virtual COM), LAN (LXI), GPIB (optional)

Miscellaneous	
Input power option	100-240 VAC +/-10% 50/60 Hz
Maximum input power	200W
Fuse	T3, 15L 250V
Operating temperature	+0°C ..+40°C
Storage temperature	-20°C..+70°C
Humidity	5...80%
Display	3,5" / QVGA
Dimensions (H x W x D)	222 x 88 x 280mm
Rack mount capability 1/2 19"	Yes
Weight	2,6kg

# Recommended Accessories

**HZC95**  
19" rackmount kit  
for HMC series, 2 HE




**HZC40**  
Female connector  
with ejectors, 8x2-pole



**HZ72**  
IEEE-488 (GPIB) bus  
interface cable



**HZ10**  
5x silicon test lead  
HZ10S: black, HZ10R: red, HZ10B: blue

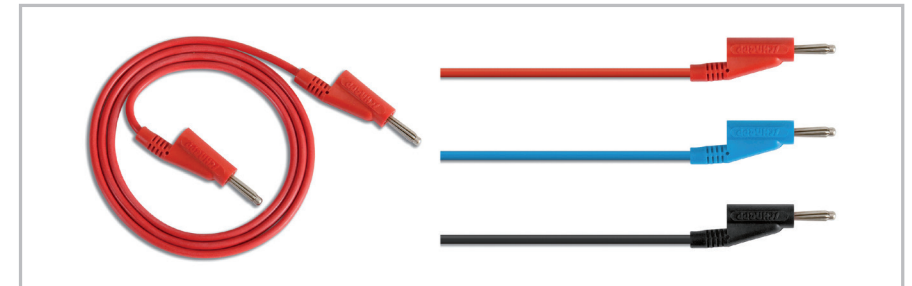

**Accessories included:**


Line cord, printed operating manual, software-CD

Printed operating manual



Software-CD



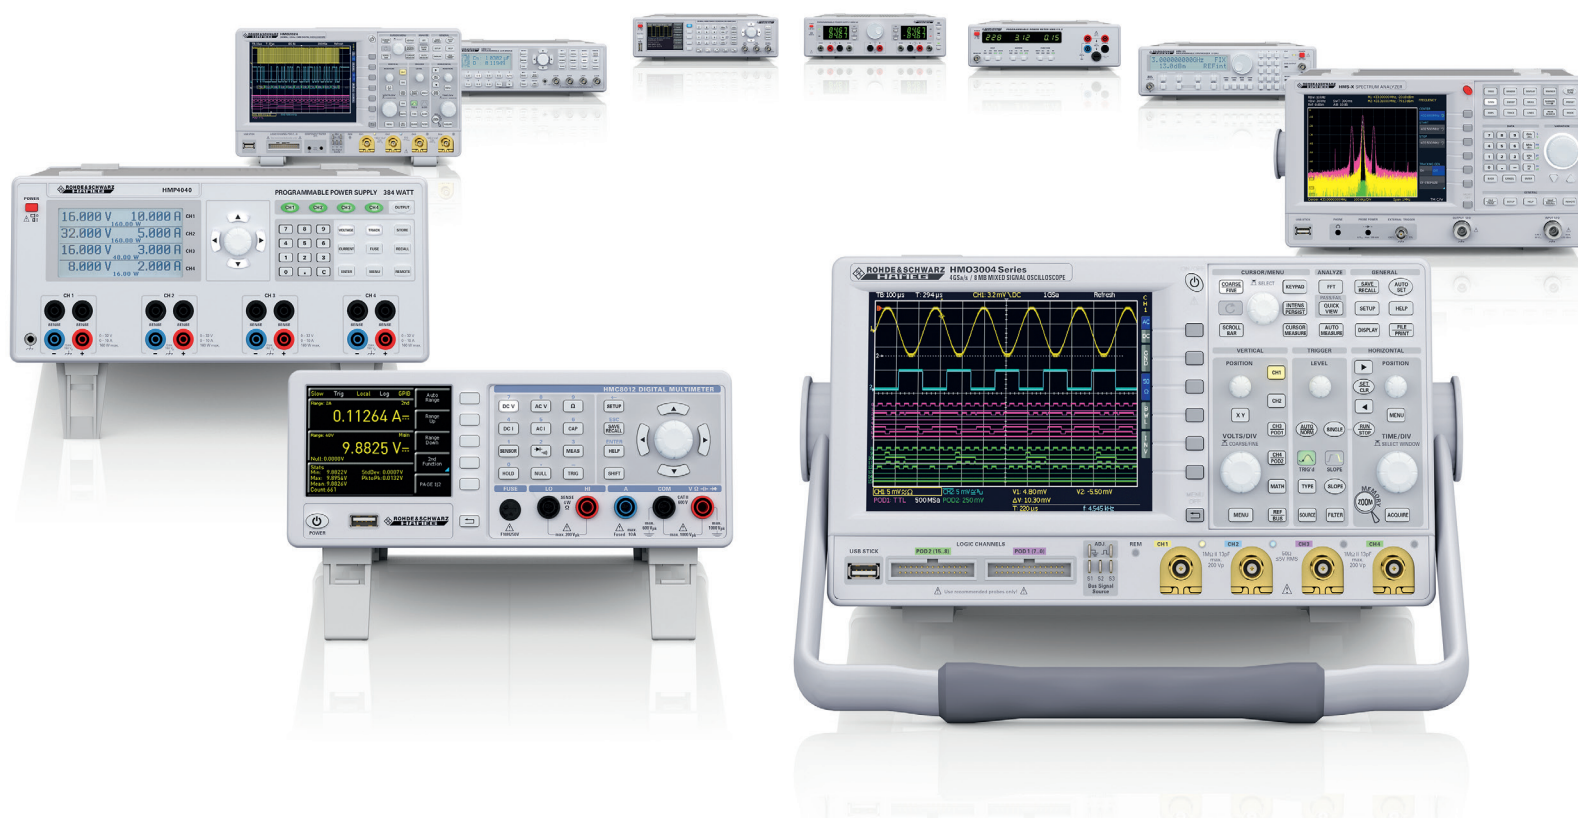

www.hameg.com

HAMEG Instruments GmbH  
 Industriestr. 6 | 63533 Mainhausen | Germany | Phone +49(0)6182 8000

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
 HAMEG Instruments® is a registered trademark of HAMEG Instruments GmbH  
 Trade names are trademarks of the owners  
 PD 3607.0169.32 | Version 01.00 | 05/2014 | © HAMEG Instruments GmbH  
 Data without tolerance limits is not binding | Subject to change



3607016932