
THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	ISED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	1/0 AWG	.60 R R
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	
Wire Strip Length	1-1/2 in.	PANDUIT PANDUI
Stud Size	1/2 in.	.80±.04
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.47±.04 .53±.02
UL Temperature Rating	90°C	2.92±.06 —
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	PINK	
Panduit Die Index No. on Barrel	P42	
Alternate Industry Die Index No. () on Barrel	(12)	








Wire Connector

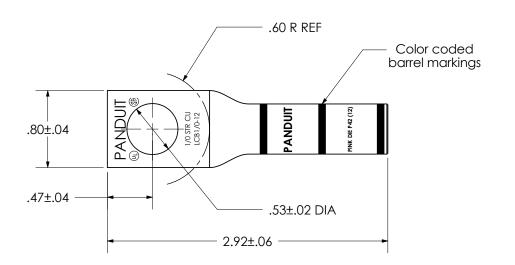

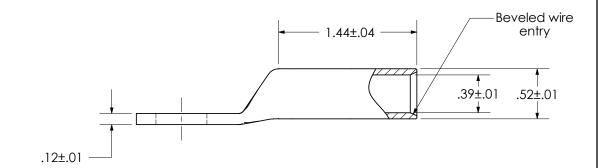

							T CORP. TIN	LEY PARK, ILLINOIS
						LCB1/0-12-X		
01	2/11	JHNU	JHNU	REMOVED NAVY NUMBER FROM STAMP		Copper Lug - One-Hole, Long Barrel		
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE	LCB1_0-12-CUST